


TRECO[®]
L I G H T I N G



ARCHITECTURAL • COMMERCIAL • RESIDENTIAL

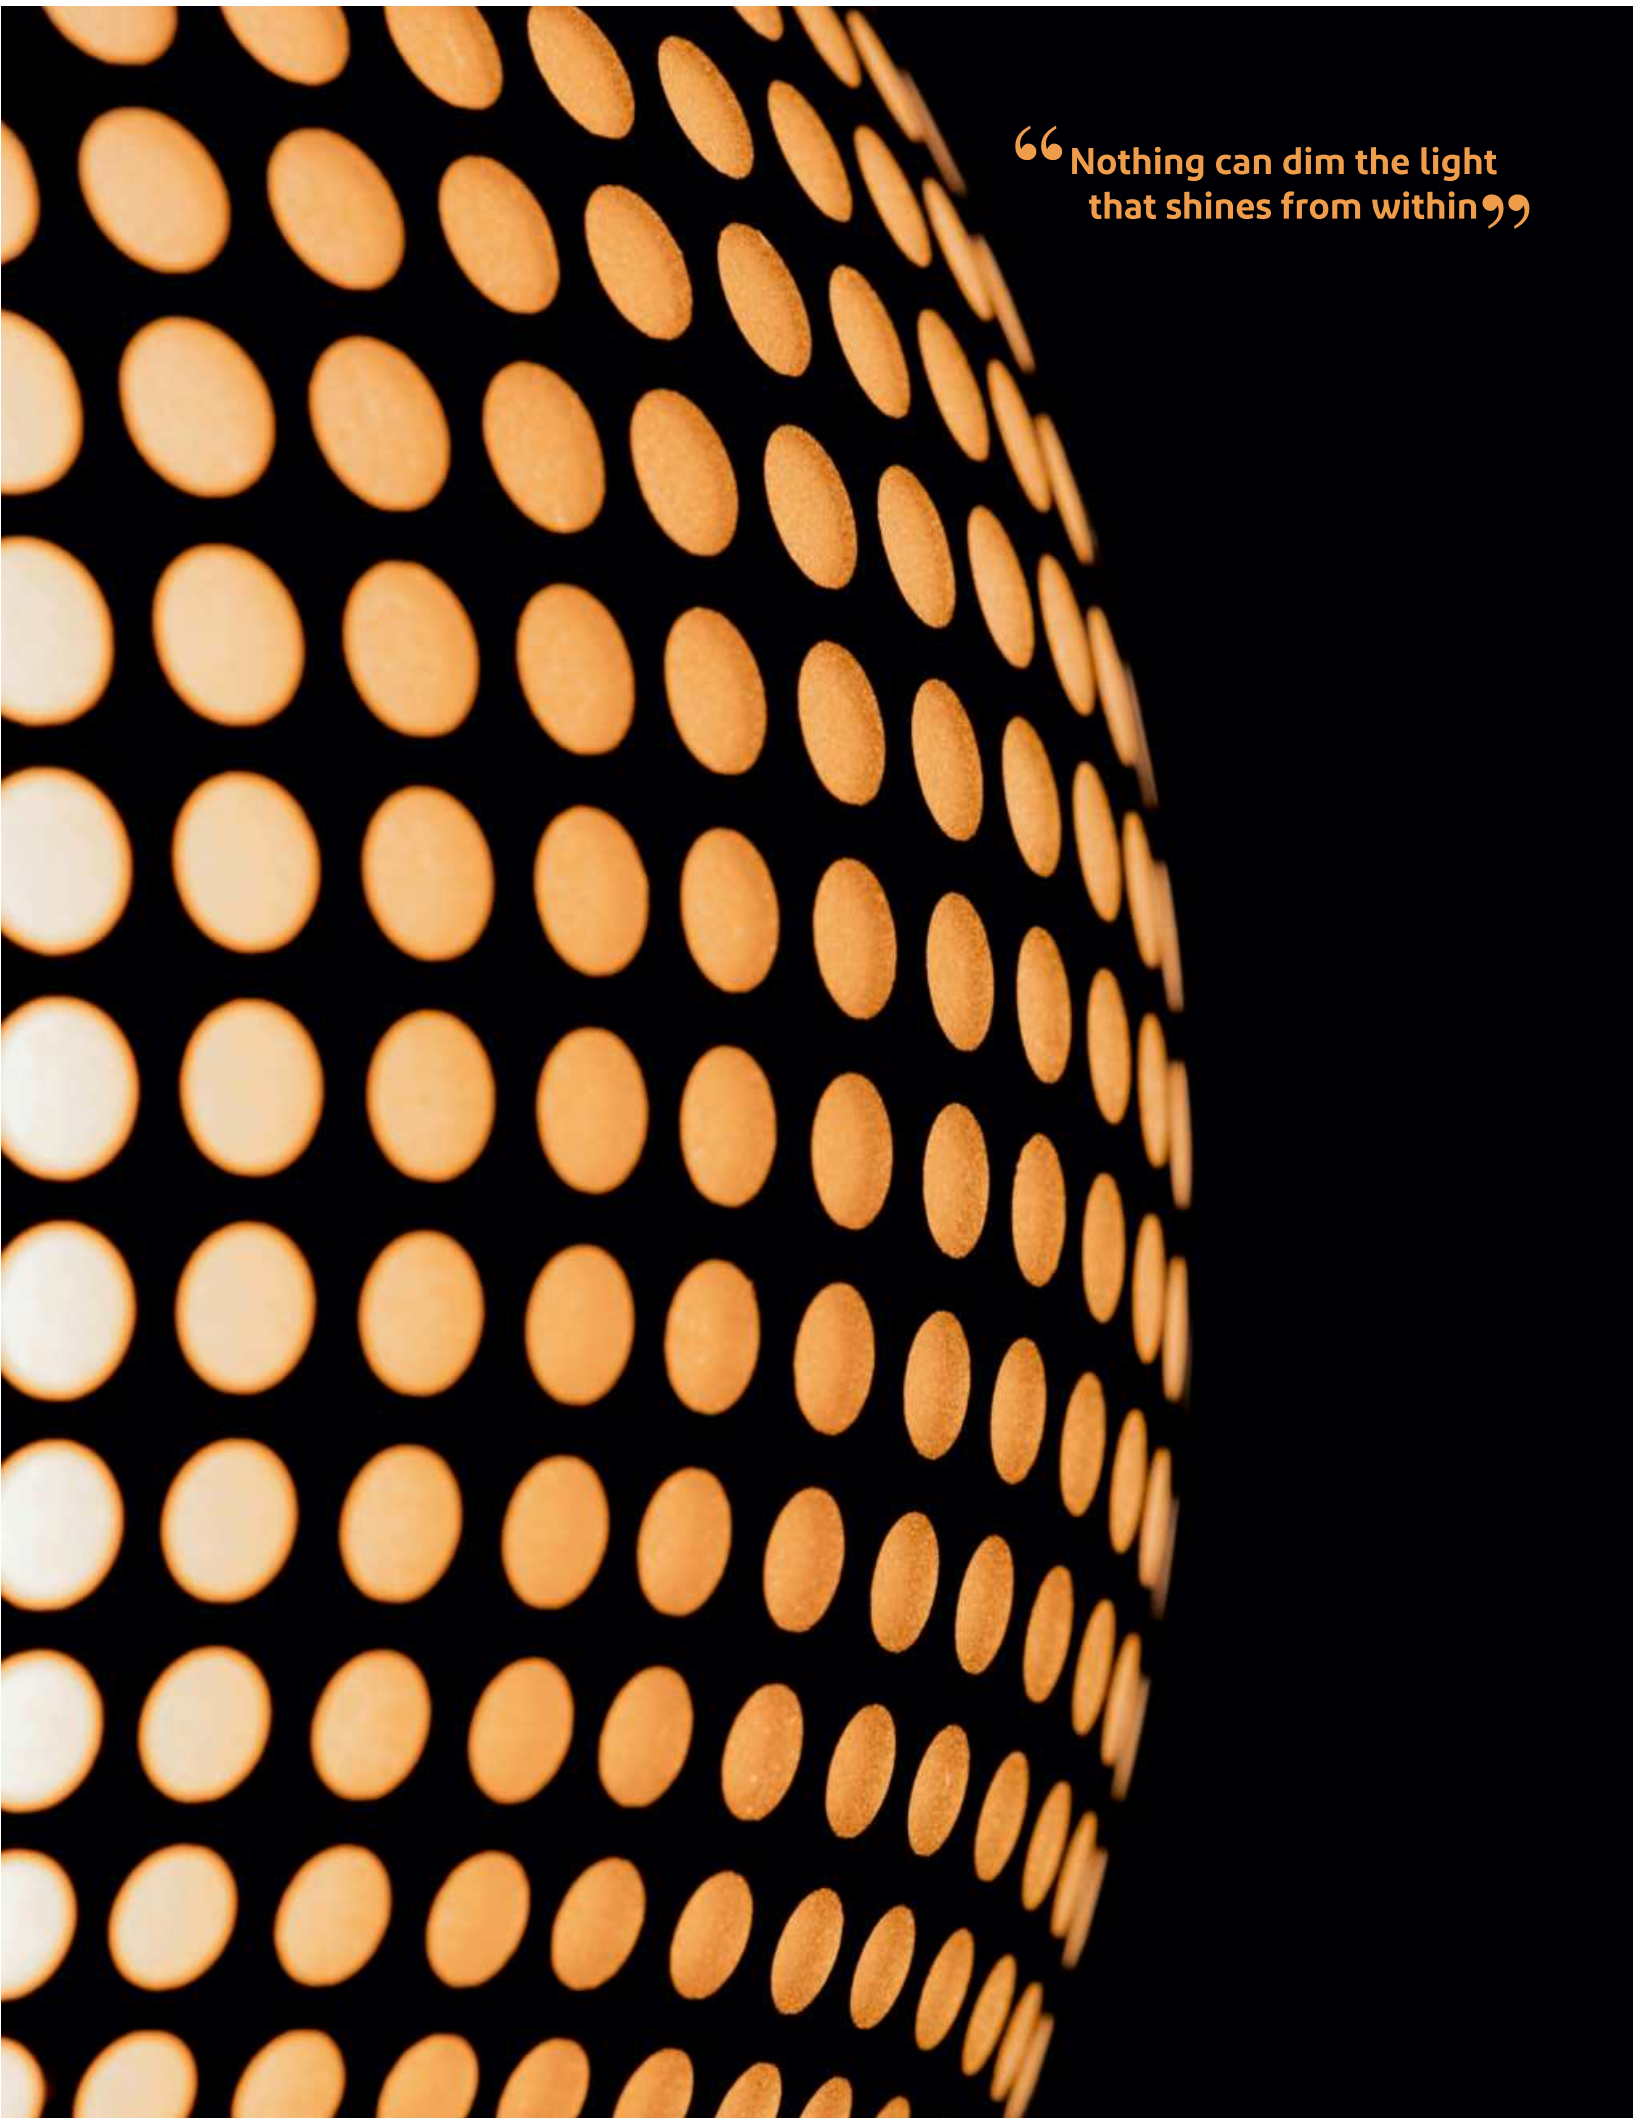

“Nothing can dim the light
that shines from within”

Recessed Surface Hanging



Ultra - Thin
Surface
Looks
Like
Recessed





Smart MAGNETIC Lights
Dimmable • Tunable • 3-in-1

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Material	CCT	Beam Angle
6W Magnetic Linear Spot	TR-MAG-SPOT6W-2.4G	6W	48V	L113 x W22 x H43	Aluminum	2700-6500	24°
12W Magnetic Linear Spot	TR-MAG-SPOT12W-2.4G	12W	48V	L220 x W22 x H43	Aluminum	2700-6500	24°
18W Magnetic Linear Spot	TR-MAG-SPOT18W-2.4G	18W	48V	L328 x W22 x H43	Aluminum	2700-6500	24°
24W Magnetic Linear Spot	TR-MAG-SPOT24W-2.4G	24W	48V	L435 x W22 x H43	Aluminum	2700-6500	24°
6W Magnetic Spot Adjustable	TR-MAG-SPOT-ADJ6W-2.4G	6W	48V	L120 x W22 x H85	Aluminum	2700-6500	24°
12W Magnetic Spot Adjustable	TR-MAG-SPOT-ADJ12W-2.4G	12W	48V	L228 x W22 x H85	Aluminum	2700-6500	24°
18W Magnetic Spot Adjustable	TR-MAG-SPOT-ADJ18W-2.4G	18W	48V	L334 x W22 x H85	Aluminum	2700-6500	24°
12W Magnetic Linear Diffused	TR-MAG-DIFFUSED12W-2.4G	12W	48V	L300 x W22 x H43	Aluminum	2700-6500	N/A
24W Magnetic Linear Diffused	TR-MAG-DIFFUSED24W-2.4G	24W	48V	L600 x W22 x H43	Aluminum	2700-6500	N/A
12W Magnetic Track Light	TR-MAG-TRACK12W-2.4G	12W	48V	D50 x H180	Aluminum	2700-6500	24°
24W Magnetic Track Light	TR-MAG-TRACK24W-2.4G	24W	48V	D60 x H200	Aluminum	2700-6500	24°
12W Magnetic Hanging Short	TR-MAG-HANG-SMALL12W-2.4G	12W	48V	D55 x H165	Aluminum	2700-6500	24°
12W Magnetic Hanging Long	TR-MAG-HANG-LONG12W-2.4G	12W	48V	D55 x H300	Aluminum	2700-6500	24°

• Tunable & Dimmable by Remote




Spot Light



Track Light



Linear Grill

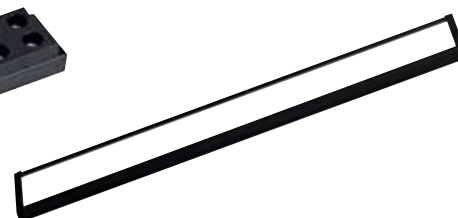

Linear Diffused



Cylinder Rotatable




Cylinder



Driver




Ultra-thin Track Channel

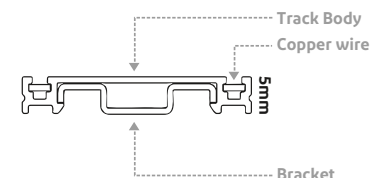


Single Spot




ARC




Jointer 180°



Jointer 90°



T Jointer



Cross Jointer



Vertical Jointer


Item	Model No.	Power	Input Volt.	Outer Size (mm)	Material	CCT	Beam Angle
12W Magnetic Linear Diffused	TR305-DF12	12W	48V	L300 x W32 x H11	Aluminum	2700-6500	105°
10W Magnetic Linear Grill	TR305-LG10	10W	48V	L240 x W32 x H11	Aluminum	2700-6500	30°
10W Magnetic Spot Adjustable	TR305-LSA10	10W	48V	L140 x W30 x H105	Aluminum	2700-6500	30°
7W Magnetic Track Light	TR305-TL07	7W	48V	D30 x H145	Aluminum	2700-6500	24°
7W Magnetic Cylinder	TR305-CD07	7W	48V	D54 x H75	Aluminum	2700-6500	24°
7W Magnetic Cylinder Rotatable	TR305-CD07R	7W	48V	D54 x H98	Aluminum	2700-6500	24°
6W Magnetic Single Spot	TR305-SP06	6W	48V	L48 x W35 x H60	Aluminum	2700-6500	30°
6W Magnetic ARC Light	TR305-ARC06	6W	48V	L48 x W35 x H60	Aluminum	2700-6500	160°

Item	Model No.
1M Magnetic Track Channel	TR305-1M
2M Magnetic Track Channel	TR305-2M
3M Magnetic Track Channel	TR305-3M
48V 100W Driver	TR305-DR100W
48V 200W Driver	TR305-DR200W

ACCESSORIES

Item	Model No.
180° Jointer	TR305-JOINTER-180
90° Jointer	TR305-JOINTER-90
T Jointer	TR305-JOINTER-T
Cross Jointer	TR305-JOINTER-CROSS
Vertical Jointer	TR305-JOINTER-VERTICAL

• Available in Cool White, Neutral White & Warm White

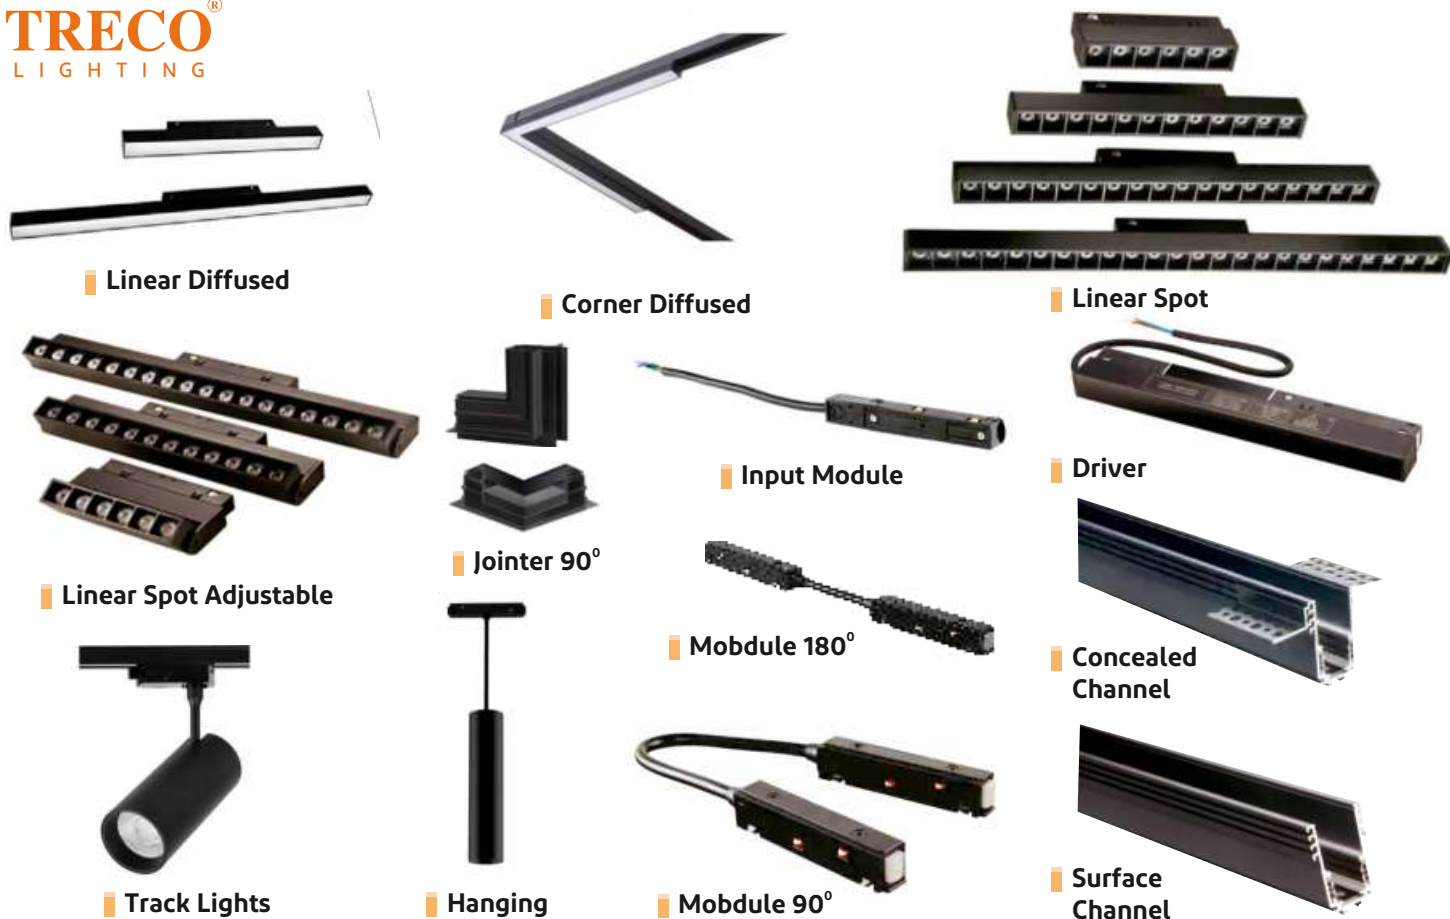

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Material	CCT	Beam Angle
6W Magnetic Linear Spot	TR-MAG-SPOT6W	6W	48V	L113 x W22 x H43	Aluminum	2700-6500	24°
12W Magnetic Linear Spot	TR-MAG-SPOT12W	12W	48V	L220 x W22 x H43	Aluminum	2700-6500	24°
18W Magnetic Linear Spot	TR-MAG-SPOT18W	18W	48V	L328 x W22 x H43	Aluminum	2700-6500	24°
24W Magnetic Linear Spot	TR-MAG-SPOT24W	24W	48V	L435 x W22 x H43	Aluminum	2700-6500	24°
6W Magnetic Spot Adjustable	TR-MAG-SPOT-ADJ6W	6W	48V	L120 x W22 x H85	Aluminum	2700-6500	24°
12W Magnetic Spot Adjustable	TR-MAG-SPOT-ADJ12W	12W	48V	L228 x W22 x H85	Aluminum	2700-6500	24°
18W Magnetic Spot Adjustable	TR-MAG-SPOT-ADJ18W	18W	48V	L334 x W22 x H85	Aluminum	2700-6500	24°
12W Magnetic Linear Diffused	TR-MAG-DIFFUSED12W	12W	48V	L300 x W22 x H43	Aluminum	2700-6500	N/A
24W Magnetic Linear Diffused	TR-MAG-DIFFUSED24W	24W	48V	L600 x W22 x H43	Aluminum	2700-6500	N/A
24W Magnetic Corner Diffused	TR-MAG-DIFF-CORNER24W	24W	48V	L300 x W22 x H43	Aluminum	2700-6500	N/A
12W Magnetic Track Light	TR-MAG-TRACK12W	12W	48V	D50 x H180	Aluminum	2700-6500	24°
24W Magnetic Track Light	TR-MAG-TRACK24W	24W	48V	D60 x H200	Aluminum	2700-6500	24°
12W Magnetic Hanging Short	TR-MAG-HANG-SMALL12W	12W	48V	D55 x H165	Aluminum	2700-6500	24°
12W Magnetic Hanging Long	TR-MAG-HANG-LONG12W	12W	48V	D55 x H300	Aluminum	2700-6500	24°

Item	Model No.
1M Magnetic Track Channel	TR-MAG-CH-1M
2M Magnetic Track Channel	TR-MAG-CH-2M
3M Magnetic Track Channel	TR-MAG-CH-3M
Track to Track Module 90°/180°	TR-MAG-MD90/180
Driver to Track Input Module	TR-MAG-MD-INPUT
Hanging Wire For Channel	TR-MAG-HANGINGSET

ACCESSORIES

Item	Model No.
3M Front Cover	TR-MAG-CH-COVER
Remote For Tunable 2.4G	TR-MAG-REMOTE 2.4G
Jointer Horizontal 90°	TR-MAG-JOINTER-HR
Jointer Vertical 90°	TR-MAG-JOINTER-VR
48V 100W Concealed Driver	TR-MAG-48VDR100
48V 200W Concealed Driver	TR-MAG-48VDR200

• Available in Cool White, Neutral White & Warm White



TRACK LIGHTS



Model No.	Power	Luminous Flux	CRI	Colour Temp.	Emiting Angle	Diamensions	Hole Size
LX 3053	15W	1390/1440/1500	>80	3000/4000/6000K	24° 36° 60°	Ø55 *H135mm	//

COB TRACK LIGHTS



360°



Rhombus


Body Colour
Black & White

Item	Model No.	Power	Input Volt.	Outer Size (mm)	COB Size	Material	CCT	Beam Angle
20W Track Light PLAIN	TR-TRACK20	20W	90-265V	85 x 135	17mm	Aluminum	2700-6500	24°
30W Track Light PLAIN	TR-TRACK30	30W	90-265V	85 x 160	17mm	Aluminum	2700-6500	24°
40W Track Light PLAIN	TR-TRACK40	40W	90-265V	110 x 160	17mm	Aluminum	2700-6500	24°
10W Track Light RHOMBUS	TRRHOMBUS10	10W	90-265V	70 x 116	11mm	Aluminum	2700-6500	24°
20W Track Light RHOMBUS	TRRHOMBUS20	20W	90-265V	90 x 116	17mm	Aluminum	2700-6500	24°
30W Track Light RHOMBUS	TRRHOMBUS30	30W	90-265V	90 x 130	17mm	Aluminum	2700-6500	24°
10W Track Light 360 Degree	TR-TR360D10	10W	90-265V	100 x 80	11mm	Aluminum	2700-6500	24°
20W Track Light 360 Degree	TR-TR360D20	20W	90-265V	110 x 95	17mm	Aluminum	2700-6500	24°
30W Track Light 360 Degree	TR-TR360D30	30W	90-265V	115 x 110	17mm	Aluminum	2700-6500	24°

• Available in Cool White, Neutral White & Warm White

SKD, Housing & Spares also available

FOCUS
PLEASANT LIGHTING
WITH
GREAT ILLUMINATION

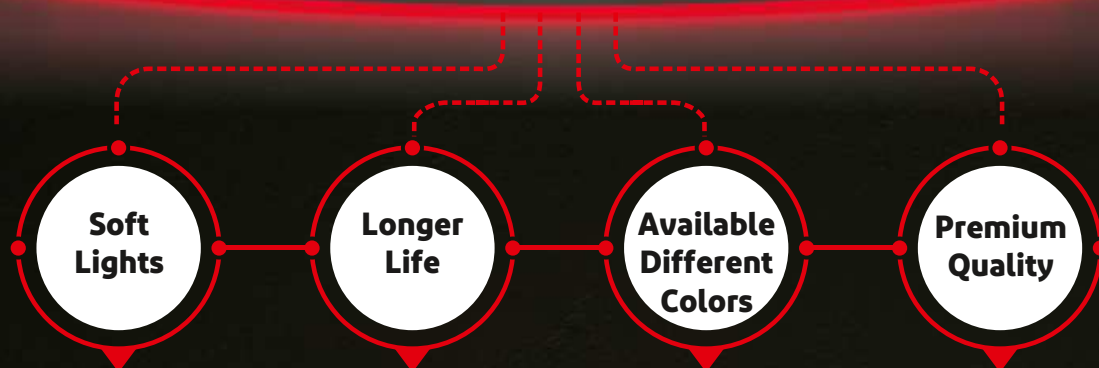

LED Cob Spot Light Series



Model No.	Power	Luminous Flux	CRI	Colour Temp.	Emitting Angle	Dimensions	Hole Size
LX 1061	2x12W	2720/2800/2880	>80	3000/4000/6000K	10° 24° 40°	Ø195x105 H85mm	Ø175x85mm



Model No.	Power	Luminous Flux	CRI	Colour Temp.	Emitting Angle	Dimensions	Hole Size
LX 1062	2x12W	2720/2800/2880	>80	3000/4000/6000K	10° 24° 40°	Ø104x196 *H92mm	Ø175x85mm



Model No.	Power	Luminous Flux	CRI	Colour Temp.	Emitting Angle	Dimensions	Hole Size
LX 1066	18W	1690/1740/1800	>80	3000/4000/6000K	10° 24° 40°	Ø70xH95mm	Ø65mm



Model No.	Power	Luminous Flux	CRI	Colour Temp.	Emitting Angle	Dimensions	Hole Size
LX 1055	12W	1090/1160/1200	>80	3000/4000/6000K	10° 24° 40°	Ø100 *H108mm	Ø182mm

• Available in Cool White, Neutral White, Warm White.

SKD, Housing & Spares also available



Linear SPOT DOWNLIGHT



Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	LED	CRI
10W Linear Spot 40x140mm	TR-LINEARSPOT40140	10W	90-265V	155 x 53	40 x 140	2W 3030	>75
20W Linear Spot 70x140mm	TR-LINEARSPOT70140	20W	90-265V	155 x 85	70 x 140	2W 3030	>75
20W Linear Spot 40x270mm	TR-LINEARSPOT40270	20W	90-265V	287 x 53	40 x 270	2W 3030	>75




COB DEEP



Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
10W COB Downlight	TR-COBDEEP10	10W	90-265V	100 x 100	85	11mm	Aluminum	2700-6500	24
20W COB Downlight	TR-COBDEEP20	20W	90-265V	120 x 130	100	11mm	Aluminum	2700-6500	24
30W COB Downlight	TR-COBDEEP30	30W	90-265V	150 x 120	130	17mm	Aluminum	2700-6500	30

• Available in Cool White, Neutral White, Warm White.


SKD, Housing & Spares also available

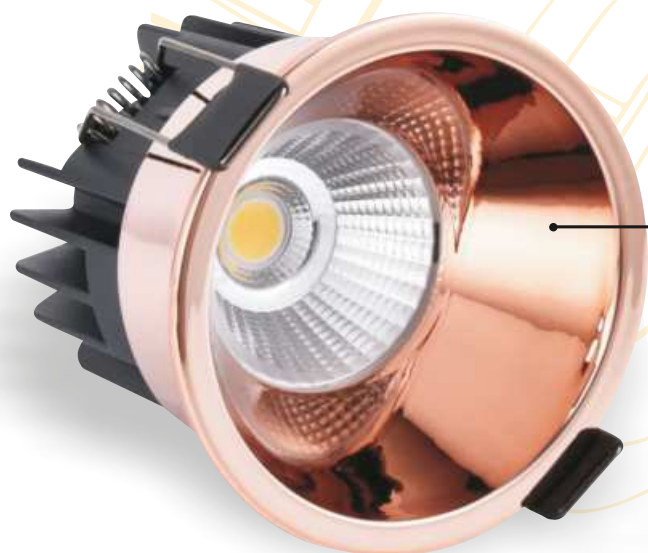

AVAILABLE COLORS

- Rose Gold + White
- Champagne Gold + White
- All White
- Gun Metal + White
- Matte Black + White
- Chrome + White
- Rose Gold + Black
- Champagne Gold + Black
- All Black
- Gun Metal + Black
- Chrome + Black

COB LIGHTS

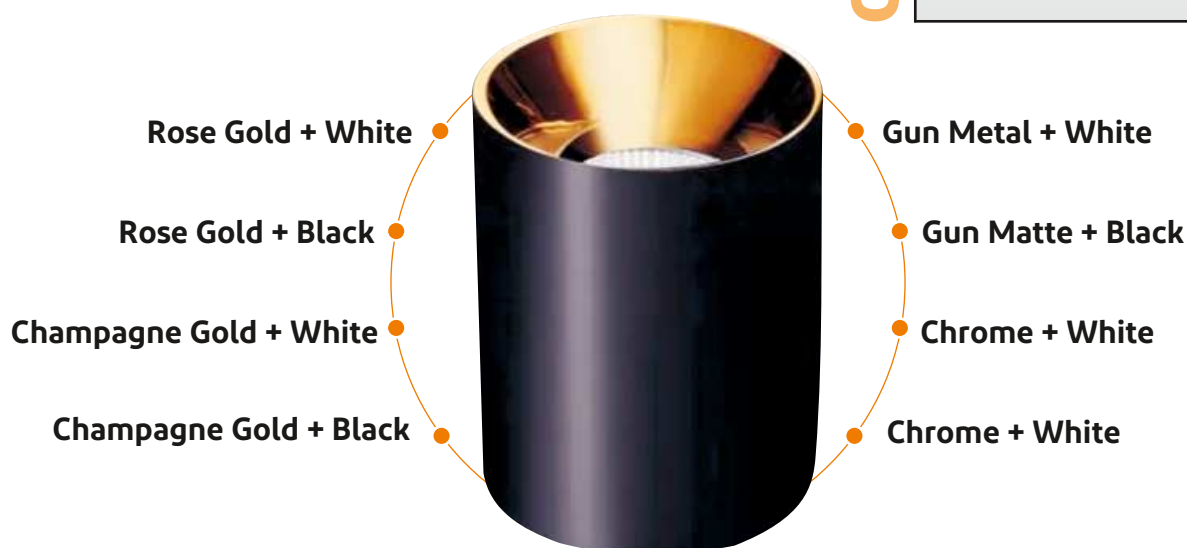

COB RECESSED COLORED REFLECTOR

Body Colour
Black & White

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
7W COB Light	TR-COBREF07	7W	90-265V	65 x 60	55	11mm	Aluminum	2700-6500	24°
12W COB Light	TR-COBREF12	12W	90-265V	85 x 76	75	11mm	Aluminum	2700-6500	24°

Reflector Options: All Black / All White / Gun Metal / Rose Gold / Matt Black / Champagne Gold / Chrome

COB SURFACE COLORED REFLECTOR


Body Colour
Black & White

Item	Model No.	Power	Input Volt.	Outer Size (mm)	COB Size	Material	CCT	Beam Angle
7W COB Surface	TR-COBSMREF07	7W	90-265V	53 x 88	11mm	Aluminum	2700-6500	24
12W COB Surface	TR-COBSMREF12	12W	90-265V	73 x 105	11mm	Aluminum	2700-6500	24
20W COB Surface	TR-COBSMREF20	20W	90-265V	93 x 110	11mm	Aluminum	2700-6500	24

Reflector Options: Gun Metal / Rose Gold / Champagne Gold / Chrome

• Available in Cool White, Neutral White, Warm White.

SKD, Housing & Spares also available

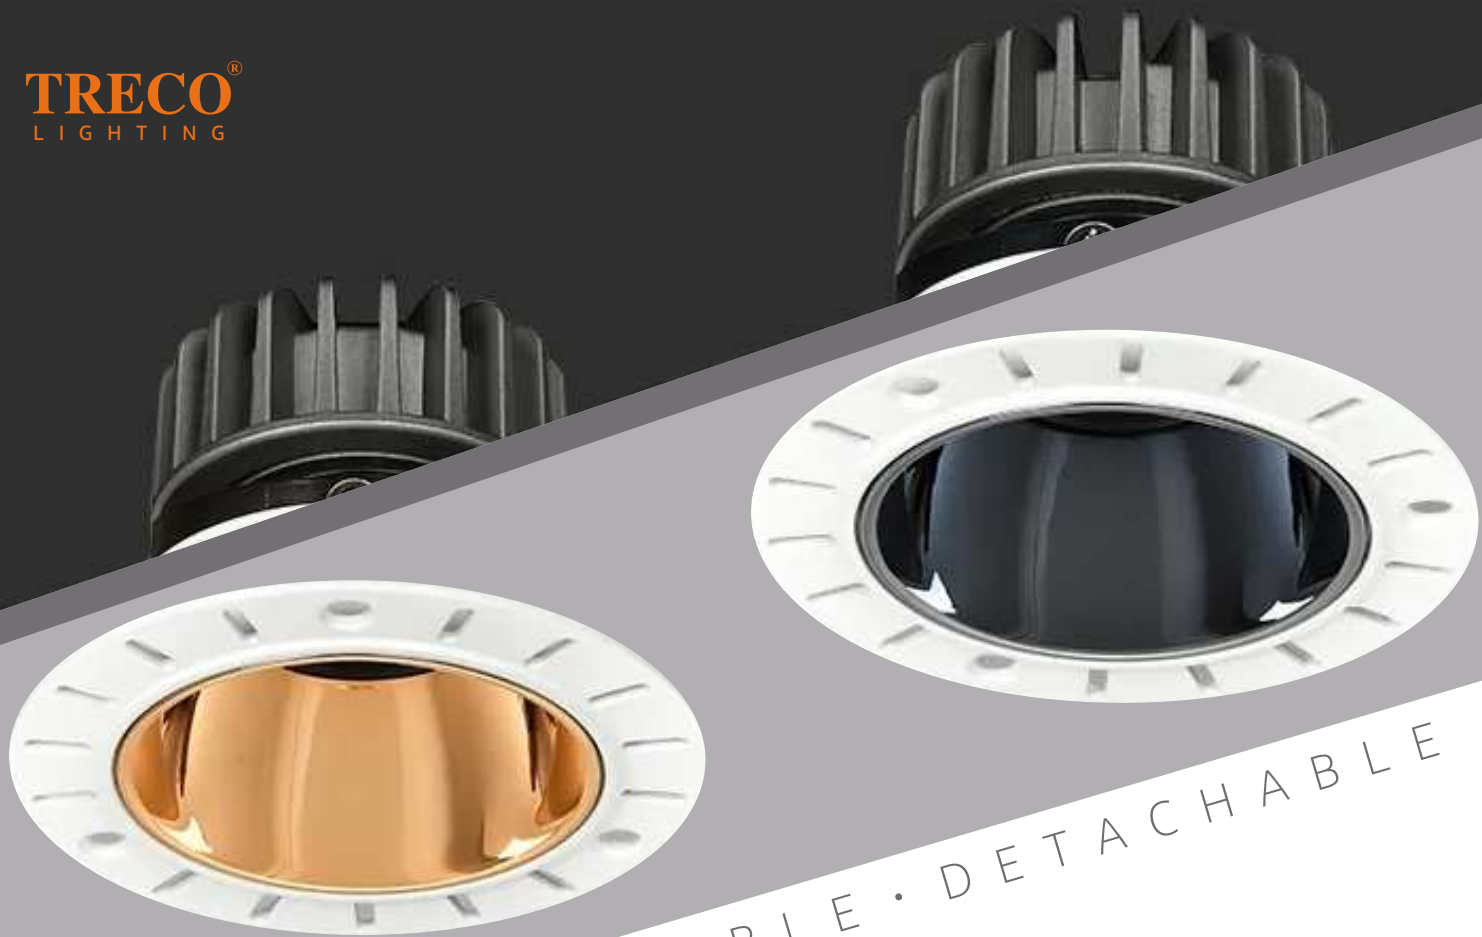

RIMLESS • TILTABLE • DETACHABLE

AVAILABLE COLORS

All White
Gun Metal
Rose Gold
Matt Black
Chrome



COB RECESSED-RIMLESS COLORED REFLECTOR

Body Colour
Black & White

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
7W COB Light	TR-RIMLESS-COBREF07	7W	90-265V	81 x 70	55	11mm	Aluminum	2700-6500	24°
12W COB Light	TR-RIMLESS-COBREF12	12W	90-265V	101 x 85	75	11mm	Aluminum	2700-6500	24°

Reflector Options: All White / Gun Metal / Rose Gold / Matt Black / Chrome

• Available in Cool White, Neutral White, Warm White.

SKD, Housing & Spares also available



HANGING LONG SURFACE



Body Colour
Black & White

Item	Model No.	Power	Input Volt.	Outer Size (mm)	COB Size	Material	CCT	Beam Angle
12W COB Hanging/Long Surface Light	TR-COBHANGING12	12W	90-265V	325 x 55	11mm	Aluminum	2700-6500	15

COB SURFACE

360° Adjustable



Body Colour
Black & White

Item	Model No.	Power	Input Volt.	Outer Size (mm)	COB Size	Material	CCT	Beam Angle
10W COB Adujustable	TR-COBSURFACE10ADJ	10W	90-265V	100 x 80	11mm	Aluminum	2700-6500	24
20W COB Adujustable	TR-COBSURFACE20ADJ	20W	90-265V	110 x 95	11mm	Aluminum	2700-6500	24
30W COB Adujustable	TR-COBSURFACE30ADJ	30W	90-265V	115 x 110	17mm	Aluminum	2700-6500	24



Thickened aviation aluminum, multiple electroplating process ring lasting new, shiny texture.



COB light source, effectively play the light effect, improve brightness, brighter and more energy saving at the same time

COB SURFACE

Body Colour
Black & White

Item	Model No.	Power	Input Volt.	Outer Size (mm)	COB Size	Material	CCT	Beam Angle
5W COB Surface Light	TR-COBSURFACE05	5W	90-265V	60 x 76	11mm	Aluminum	2700-6500	24°
10W COB Surface Light	TR-COBSURFACE10	10W	90-265V	75 x 100	11mm	Aluminum	2700-6500	24°
20W COB Surface Light	TR-COBSURFACE20	20W	90-265V	100 x 100	11mm	Aluminum	2700-6500	30°
30W COB Surface Light	TR-COBSURFACE30	30W	90-265V	120 x 120	17mm	Aluminum	2700-6500	30°

• Available in Cool White, Neutral White, Warm White.

5W Available in Red, Green, Blue & Pink

SKD, Housing & Spares also available



COB SPOT

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
3W COB Downlight	TR-COBSPOT03	3W	90-265V	68 x 50	Φ 50	11mm	Aluminum	2700-6500	24°
5W COB Downlight	TR-COBSPOT05	5W	90-265V	85 x 65	Φ 70	11mm	Aluminum	2700-6500	24°
10W COB Downlight	TR-COBSPOT10	10W	90-265V	110 x 70	Φ 90	11mm	Aluminum	2700-6500	24°
15W COB Downlight	TR-COBSPOT15	15W	90-265V	135 x 80	Φ 115	11mm	Aluminum	2700-6500	24°
30W COB Downlight	TR-COBSPOT30	30W	90-265V	160 x 110	Φ 135	17mm	Aluminum	2700-6500	24°



COB ZOOM

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
12W ZOOM Light	TR-ZOOM12	12W	90-265V	104 x 60	Φ 95	11mm	Aluminum	2700-6500	24°
20W ZOOM Light	TR-ZOOM20	20W	90-265V	135 x 115	Φ 120	11mm	Aluminum	2700-6500	24°
30W ZOOM Light	TR-ZOOM30	30W	90-265V	165 x 150	Φ 150	17mm	Aluminum	2700-6500	36°
40W ZOOM Light	TR-ZOOM40	40W	90-265V	165 x 150	Φ 150	17mm	Aluminum	2700-6500	36°



COB SPOT

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
75W Cob Spot	TR-TT 001	3W	90-265V	35 x 37.5	Φ 30	11mm	Aluminum	2700-6500	24° 24° 24°



• Available in Cool White, Neutral White, Warm White, Red, Green, Blue & Pink

SKD, Housing & Spares also available

COB SPOT COB SPOT COB SPOT



01



02



03

ENERGY SAVING
THE ONLY FRIEND YOU NEED
TO LIGHT UP YOUR LIFE



04

01	Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
	7W COB SPOT	TR-TT 1006	7W	90-265V	40 x 60	Φ 33	11mm	Aluminum	2700-6500	10° 24° 40°

02	Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
	7W COB SPOT	TR-TT 1010	7W	90-265V	91 x 55	Φ 83	11mm	Aluminum	2700-6500	10° 24° 40°

03	Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
	2x7W COB SPOT	TR-TT 1011	2x7W	90-265V	168 x 55	Φ 2x83	11mm	Aluminum	2700-6500	10° 24° 40°

04	Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
	7W COB SPOT	TR-TT 1012	7W	90-265V	64 x 60	Φ 60	11mm	Aluminum	2700-6500	10° 24° 40°


• Available in Cool White, Neutral White, Warm White, Red, Green, Blue & Pink

SKD, Housing & Spares also available


COB SPOT





Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
12W COB SPOT	TR-TT 1055	12W	90-265V	100 x 108	Φ 82	11mm	Aluminum	2700-6500	10° 24° 40°

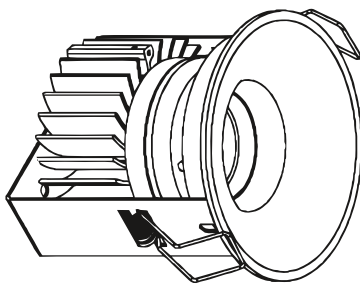

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
7W COB SPOT	TR-TT 1014	7W	90-265V	70 x 64	Φ 58	11mm	Aluminum	2700-6500	10° 24° 40°



Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
7W COB SPOT	TR-TT 1012	7W	90-265V	64 x 60	Φ 60	11mm	Aluminum	2700-6500	10° 24° 40°



Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
TR-TT 1080	12W	90-265V	98x124	Φ 90	11mm	Aluminum	2700-6500	10° 24° 40°


• Available in Cool White, Neutral White, Warm White, Red, Green, Blue & Pink

SKD, Housing & Spares also available


COB SPOT



Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
12W COB SPOT	TR-TT 1075	12W	90-265V	90x90x84.6	Φ75x75	11mm	Aluminum	2700-6500	10° 24° 40°

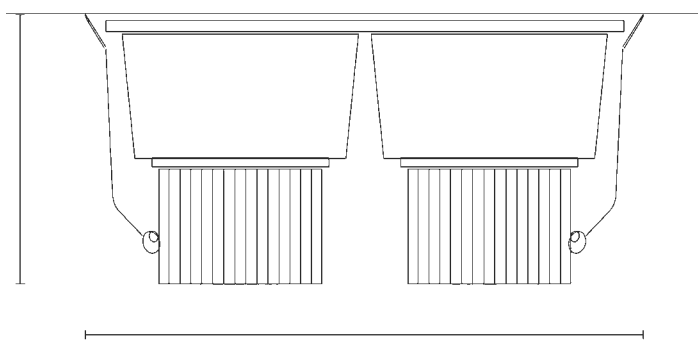

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
2x12W COB SPOT	TR-TT 1076	12W	90-265V	175 x 90	Φ160x75	11mm	Aluminum	2700-6500	10° 24° 40°



Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
12W COB SPOT	TR-TT 1080	12W	90-265V	98x124	Φ 90	11mm	Aluminum	2700-6500	10° 24° 40°



Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
15W COB SPOT	TR-TT 1084B	15W	90-265V	95x90	Φ85	11mm	Aluminum	2700-6500	10° 24° 40°

• Available in Cool White, Neutral White, Warm White, Red, Green, Blue & Pink

SKD, Housing & Spares also available



Surface Mounted Light

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
12W COB SPOT	TR-TT 3002	12W	90-265V	63 x 160	-	-	Aluminum	2700-6500	10° 24° 40°



Surface Mounted Light

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	COB Size	Material	CCT	Beam Angle
15W COB SPOT	TR-TT 1084A	15W	90-265V	95 x 90	Φ 85	11mm	Aluminum	2700-6500	10° 24° 40°

Surface Mounted Light



Model No.	Power	Luminous Flux	CRI	Colour Temp.	Emitting Angle	Dimensions	Hole Size
LX 3002	12W	960-1080LM	>80	3000/4000/6000K	24° 36° 40°	Ø63 *H160mm	//

• Available in Cool White, Neutral White, Warm White, Red, Green, Blue & Pink

SKD, Housing & Spares also available

COB FOCUS LIGHTS



Plain Lights



Rhombus



Body Colour
Black & White


Item	Model No.	Power	Input Volt.	Outer Size (mm)	COB Size	Material	CCT	Beam Angle
20W Focus Light PLAIN	TR-FOCUS20	20W	90-265V	85 x 135	17mm	Aluminum	2700-6500	24°
30W Focus Light PLAIN	TR-FOCUS30	30W	90-265V	85 x 160	17mm	Aluminum	2700-6500	24°
40W Focus Light PLAIN	TR-FOCUS40	40W	90-265V	110 x 160	17mm	Aluminum	2700-6500	24°
10W Focus Light RHOMBUS	TR-FOCUSRHOMBUS10	10W	90-265V	70 x 116	11mm	Aluminum	2700-6500	24°
20W Focus Light RHOMBUS	TR-FOCUSRHOMBUS20	20W	90-265V	90 x 116	17mm	Aluminum	2700-6500	24°
30W Focus Light RHOMBUS	TR-FOCUSRHOMBUS30	30W	90-265V	90 x 130	17mm	Aluminum	2700-6500	24°



• Available in Cool White, Neutral White & Warm White

SKD, Housing & Spares also available



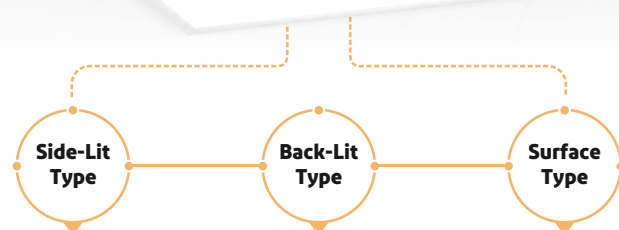

2X2 COMMERCIAL CEILING PANEL LIGHT

AVAILABLE IN SURFACE MOUNT ALSO

Type	Model No.	Power	Size (mm)	Height (mm)	LED	No. of LED	Lumens*	Input Voltage
Side-Lit	TR-SLP20240W	40W	600 x 600	10.5	2835	200 Pcs. 0.2W	≥ 3600	90-265V
Back-Lit	TR-BLP20248W	48W	600 x 600	30	2835	48 Pcs. 1.5W	≥ 4400	90-265V



DEEP RECESSED

**Aluminium
Back-LT**

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	No. of LED	Lumens*	CRI
12W Backlit Downlight	TR-DEEP-BL12	12W	90-265V	Φ 120x50	Φ 110	60	1200	>75
18W Backlit Downlight	TR-DEEP-BL18	18W	90-265V	Φ 155x55	Φ 145	90	1800	>75
24W Backlit Downlight	TR-DEEP-BL24	24W	90-265V	Φ 175x55	Φ 165	120	2400	>75

• Available in Cool White, Neutral White, Warm White.

SKD, Housing & Spares also available



RECESSED ROUND

**Aluminium
Slim**

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	No. of LED	Lumens*	CRI
3W Panel Light	TR-DL03AL	3W	90-265V	85 x 14	Φ 70	15	300	>75
6W Panel Light	TR-DL06AL	6W	90-265V	120 x 14	Φ 100	30	600	>75
9W Panel Light	TR-DL09AL	9W	90-265V	120 x 14	Φ 100	45	900	>75
12W Panel Light	TR-DL12AL	12W	90-265V	165 x 14	Φ 150	60	1200	>75
15W Panel Light	TR-DL15AL	15W	90-265V	165 x 14	Φ 150	75	1500	>75
20W Panel Light	TR-DL20AL	20W	90-265V	225 x 14	Φ 200	100	2000	>75
24W Panel Light	TR-DL24AL	24W	90-265V	300 x 14	Φ 275	120	2400	>75

RECESSED SQUARE

Surface Mount Available from 6W-24W

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	No. of LED	Lumens*	CRI
3W Panel Light	TR-DL03ALSQ	3W	90-265V	85 x 85 x 14	70 x 70	15	300	>75
6W Panel Light	TR-DL06ALSQ	6W	90-265V	120 x 120 x 14	100 x 100	30	600	>75
9W Panel Light	TR-DL09ALSQ	9W	90-265V	120 x 120 x 14	100 x 100	45	900	>75
12W Panel Light	TR-DL12ALSQ	12W	90-265V	165 x 165 x 14	150 x 150	60	1200	>75
15W Panel Light	TR-DL15ALSQ	15W	90-265V	165 x 165 x 14	150 x 150	75	1500	>75
20W Panel Light	TR-DL20ALSQ	20W	90-265V	225 x 225 x 14	200 x 200	100	2000	>75
24W Panel Light	TR-DL24ALSQ	24W	90-265V	300 x 300 x 14	275 x 275	120	2400	>75



RECESSED ROUND

**Aluminium
Trim**

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	No. of LED	Lumens*	CRI
9W TRIM Panel Light	TRDL09	9W	90-265V	Φ 130	Φ 105	45	900	>75
15W TRIM Panel Light	TRDL15	15W	90-265V	Φ 170	Φ 155	75	1500	>75
20W TRIM Panel Light	TRDL20	20W	90-265V	Φ 225	Φ 205	100	2000	>75

RECESSED SQUARE

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	No. of LED	Lumens*	CRI
9W TRIM Panel Light	TRDL09SQ	9W	90-265V	Φ 130	Φ 105	45	900	>75
15W TRIM Panel Light	TRDL15SQ	15W	90-265V	Φ 170	Φ 155	75	1500	>75
20W TRIM Panel Light	TRDL20SQ	20W	90-265V	Φ 225	Φ 205	100	2000	>75

• Available in Cool White, Neutral White & Warm White

SKD, Housing & Spares also available



SURFACE ROUND

Motion Sensor Light

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	No. of LED	Lumens*	CRI
6W Panel Light	TR-SDL06AL-MS	6W	90-265V	120 x 14	Φ 100	30	600	>75
9W Panel Light	TR-SDL09AL-MS	9W	90-265V	120 x 14	Φ 100	45	900	>75
12W Panel Light	TR-SDL12AL-MS	12W	90-265V	165 x 14	Φ 150	60	1200	>75
15W Panel Light	TR-SDL15AL-MS	15W	90-265V	165 x 14	Φ 150	75	1500	>75
20W Panel Light	TR-SDL20AL-MS	20W	90-265V	225 x 14	Φ 200	100	2000	>75
24W Panel Light	TR-SDL24AL-MS	24W	90-265V	300 x 14	Φ 275	120	2400	>75

SURFACE SQUARE

Surface Mount Available from 6W-24W

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Hole Size (mm)	No. of LED	Lumens*	CRI
6W Panel Light	TR-SDL06ALSQ-MS	6W	90-265V	120 x 120 x 14	100 x 100	30	600	>75
9W Panel Light	TR-SDL09ALSQ-MS	9W	90-265V	120 x 120 x 14	100 x 100	45	900	>75
12W Panel Light	TR-SDL12ALSQ-MS	12W	90-265V	165 x 165 x 14	150 x 150	60	1200	>75
15W Panel Light	TR-SDL15ALSQ-MS	15W	90-265V	165 x 165 x 14	150 x 150	75	1500	>75
20W Panel Light	TR-SDL20ALSQ-MS	20W	90-265V	225 x 225 x 14	200 x 200	100	2000	>75
24W Panel Light	TR-SDL24ALSQ-MS	24W	90-265V	300 x 300 x 14	275 x 275	120	2400	>75

RECHARGEABLE WARDROBE LIGHT

MODEL :	WL200	WL300	WL400	WL600
SIZE (MM) :	170x30x15	285x30x15	385x30x15	585x30x15
BATTERY :	500mAh	500mAh	800mAh	1200mAh
ANGLE :	120°	120°	120°	120°
DELAY :	20sec	20sec	20sec	20sec
• MOTION SENSOR • LIGHT SENSOR • INTELLIGENT USB CHARGING				



A Glow that
Defines *Luxury*





HANGING LIGHTS

Body
Black, Silver & White
Size Available : 1Ft. to 12Ft.


Item	Model No.	Power	Input Volt.	LED	No. of LED	Size (mm)
45W Hanging Profile 3382 9REF	TR-D3382-45W9R	45W	90-265V	3030	45	33*82*1200
36W Hanging Profile 3382 9REF 2PC	TR-D3382-36W3R2PC	36W	90-265V	3030/2835	15/120	33*82*1200
36W Hanging Linear Profile 5070	TR-D5070-36W	36W	90-265V	2835	192	50*70*1200
48W Hanging Linear Profile 5070	TR-D5070-48W	48W	90-265V	2835	240	50*70*1200

• Available in Cool White, Neutral White & Warm White

SKD, Housing & Spares also available


DISC

Product	Color Temperature	Watt	Voltage	Dimension(MM)
TR-LED400PSR30W	3000K/4000K/6000K	30W	100 - 285V AC, 50Hz	Ø400X65
TR-LED600PSR40W	3000K/4000K/6000K	40W	100 - 285V AC, 50Hz	Ø600X65
TR-LED800PSR50W	3000K/4000K/6000K	50W	100 - 285V AC, 50Hz	Ø800X65
TR-LED1000PSR60W	3000K/4000K/6000K	60W	100 - 285V AC, 50Hz	Ø1000X65
TR-LED1200PSR70W	3000K/4000K/6000K	70W	100 - 285V AC, 50Hz	Ø1200X65

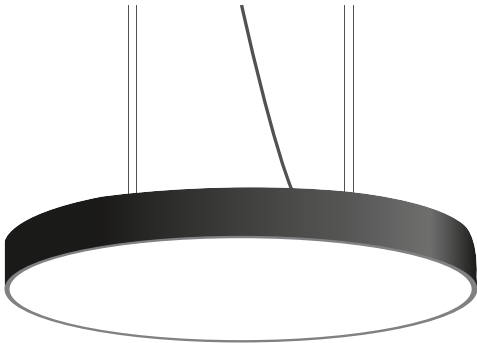

DISC+


Product	Color Temperature	Watt	Voltage	Dimension(MM)
TR-LEDIS400PSR30W	3000K/4000K/6000K	30W	100 - 285V AC, 50Hz	Ø400X65
TR-LEDIS600PSR40W	3000K/4000K/6000K	40W	100 - 285V AC, 50Hz	Ø600X65
TR-LEDIS800PSR50W	3000K/4000K/6000K	50W	100 - 285V AC, 50Hz	Ø800X65
TR-LEDIS1000PSR60W	3000K/4000K/6000K	60W	100 - 285V AC, 50Hz	Ø1000X65

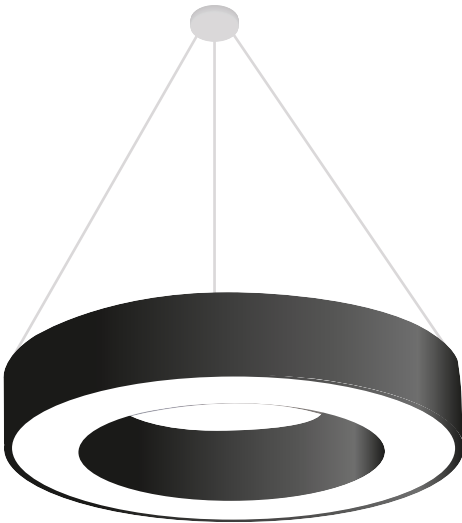

• Available in Red, Yellow, Blue, Cool White, Black Note: Customize shape, size and powder coating color available upon request.

OPEN DISC

Product	Color Temperature	Watt	Voltage	Dimension(MM)
TR-LEOPD400PSR30W	3000K/4000K/6000K	30W	100 - 285V AC, 50Hz	Ø400X65
TR-LEOPD600PSR40W	3000K/4000K/6000K	40W	100 - 285V AC, 50Hz	Ø600X65
TR-LEOPD800PSR50W	3000K/4000K/6000K	50W	100 - 285V AC, 50Hz	Ø800X65
TR-LEOPD1000PSR60W	3000K/4000K/6000K	60W	100 - 285V AC, 50Hz	Ø1000X65

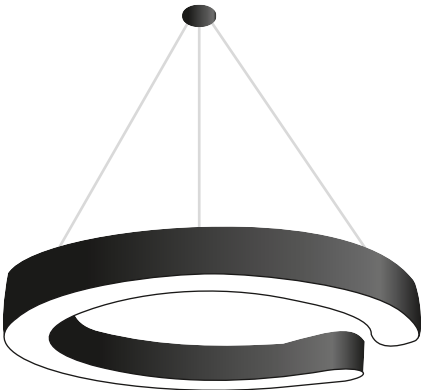

CURVE


Product	Color Temperature	Watt	Voltage	Dimension(MM)
TR-LECUR400PSR20W	3000K/4000K/6000K	20W	100 - 285V AC, 50Hz	1000X50X70
TR-LECUR600PSR30W	3000K/4000K/6000K	30W	100 - 285V AC, 50Hz	1000X70X90



• Available in Red, Yellow, Blue, Cool White, Black Note: Customize shape, size and powder coating color available upon request.

QUAD

Product	Color Temperature	Watt	Voltage	Dimension(MM)
TR-LEQA300PSR24W	3000K/4000K/6000K	24W	100 - 285V AC, 50Hz	300X300X65
TR-LEQA600PSR48W	3000K/4000K/6000K	48W	100 - 285V AC, 50Hz	600X600X65

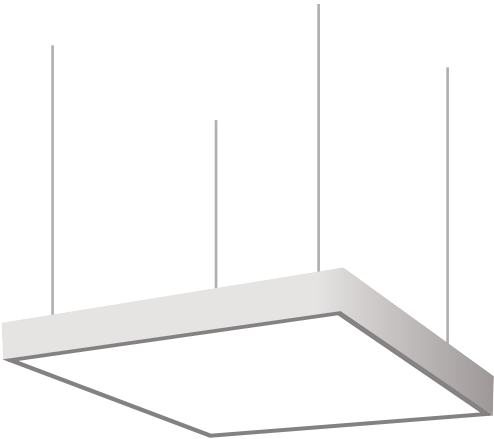

QUAD CURVE

Product	Color Temperature	Watt	Voltage	Dimension(MM)
TR-LEQAC300PSR24W	3000K/4000K/6000K	24W	100 - 285V AC, 50Hz	300X300X65
TR-LEQAC600PSR48W	3000K/4000K/6000K	48W	100 - 285V AC, 50Hz	600X600X65



• Available in Red, Yellow, Blue, Cool White, Black Note: Customize shape, size and powder coating color available upon request.

QUAD+

Product	Color Temperature	Watt	Voltage	Dimension(MM)
TR-LEQAP300PSR24W	3000K/4000K/6000K	24W	100 - 285V AC, 50Hz	300X300X65
TR-LEQAP600PSR48W	3000K/4000K/6000K	48W	100 - 285V AC, 50Hz	600X600X65



HEXAD


Product	Color Temperature	Watt	Voltage	Dimension(MM)
TR-LEHA400PSR30W	3000K/4000K/6000K	30W	100 - 285V AC, 50Hz	350X90
TR-LEHA600PSR40W	3000K/4000K/6000K	40W	100 - 285V AC, 50Hz	550X90
TR-LEHA800PSR50W	3000K/4000K/6000K	50W	100 - 285V AC, 50Hz	750X90
TR-LEHA1000PSR60W	3000K/4000K/6000K	60W	100 - 285V AC, 50Hz	950X90



• Available in Red, Yellow, Blue, Cool White, Black Note: Customize shape, size and powder coating color available upon request.


HEXAD+

Product	Color Temperature	Watt	Voltage	Dimension(MM)
TR-LEHAP400PSR30W	3000K/4000K/6000K	30W	100 - 285V AC, 50Hz	350X90
TR-LEHAP600PSR40W	3000K/4000K/6000K	40W	100 - 285V AC, 50Hz	550X90
TR-LEHAP800PSR50W	3000K/4000K/6000K	50W	100 - 285V AC, 50Hz	750X90
TR-LEHAP1000PSR60W	3000K/4000K/6000K	60W	100 - 285V AC, 50Hz	950X90

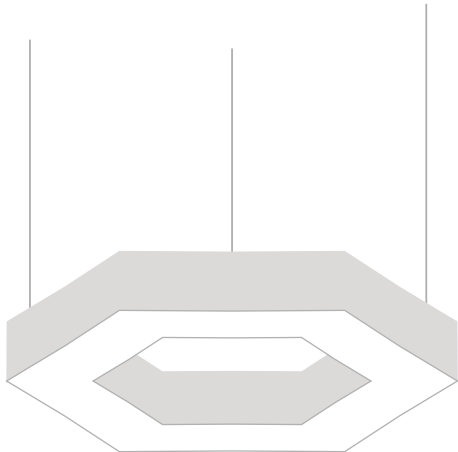

TRIO

Product	Color Temperature	Watt	Voltage	Dimension(MM)
TR-LETR400PSR30W	3000K/4000K/6000K	30W	100 - 285V AC, 50Hz	400X90
TR-LETR600PSR40W	3000K/4000K/6000K	40W	100 - 285V AC, 50Hz	600X90
TR-LETR800PSR50W	3000K/4000K/6000K	50W	100 - 285V AC, 50Hz	800X90
TR-LETR1000PSR60W	3000K/4000K/6000K	60W	100 - 285V AC, 50Hz	1000X90

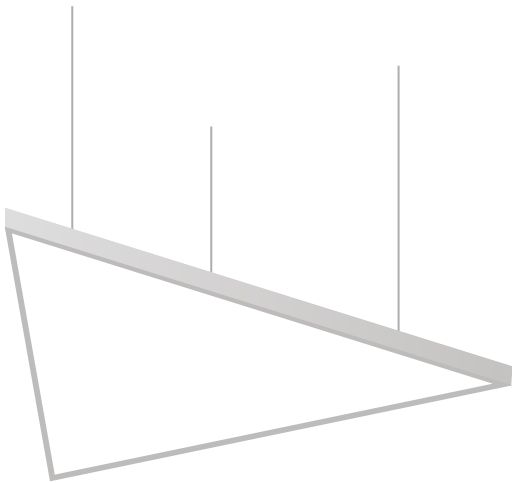

• Available in Red, Yellow, Blue, Cool White, Black Note: Customize shape, size and powder coating color available upon request.


TRIO+

Product	Color Temperature	Watt	Voltage	Dimension(MM)
TR-LETRP400PSR30W	3000K/4000K/6000K	30W	100 - 285V AC, 50Hz	400X90
TR-LETRP600PSR40W	3000K/4000K/6000K	40W	100 - 285V AC, 50Hz	600X90
TR-LETRP800PSR50W	3000K/4000K/6000K	50W	100 - 285V AC, 50Hz	800X90
TR-LETRP1000PSR60W	3000K/4000K/6000K	60W	100 - 285V AC, 50Hz	1000X90



TRIO CURVE


Product	Color Temperature	Watt	Voltage	Dimension(MM)
TR-LETRC400PSR30W	3000K/4000K/6000K	30W	100 - 285V AC, 50Hz	400X90
TR-LETRC600PSR40W	3000K/4000K/6000K	40W	100 - 285V AC, 50Hz	600X90
TR-LETRC800PSR50W	3000K/4000K/6000K	50W	100 - 285V AC, 50Hz	800X90
TR-LETRC1000PSR60W	3000K/4000K/6000K	60W	100 - 285V AC, 50Hz	1000X90

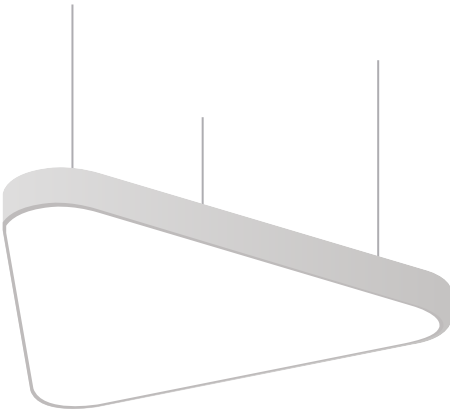

• Available in Red, Yellow, Blue, Cool White, Black Note: Customize shape, size and powder coating color available upon request.


YES

Product	Color Temperature	Watt	Voltage	Dimension(MM)
TR-LEYE600PSR30W	3000K/4000K/6000K	30W	100 - 285V AC, 50Hz	600X70
TR-LEYE900PSR40W	3000K/4000K/6000K	40W	100 - 285V AC, 50Hz	900X70

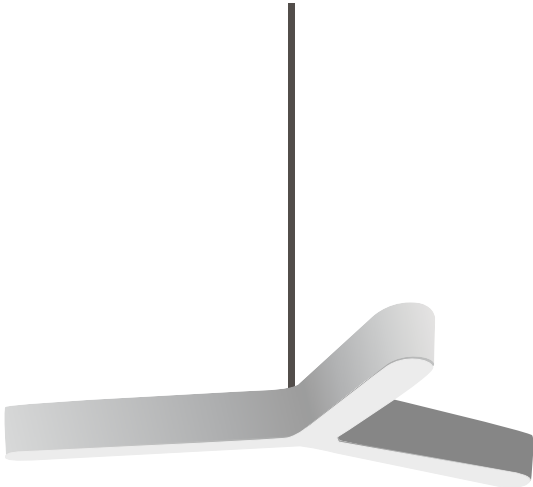


BLOOM

Product	Color Temperature	Watt	Voltage	Dimension(MM)
TR-LEBL400PSR20W	3000K/4000K/6000K	20W	100 - 285V AC, 50Hz	400X90
TR-LEBL600PSR30W	3000K/4000K/6000K	30W	100 - 285V AC, 50Hz	600X90
TR-LEBL800PSR40W	3000K/4000K/6000K	40W	100 - 285V AC, 50Hz	800X90

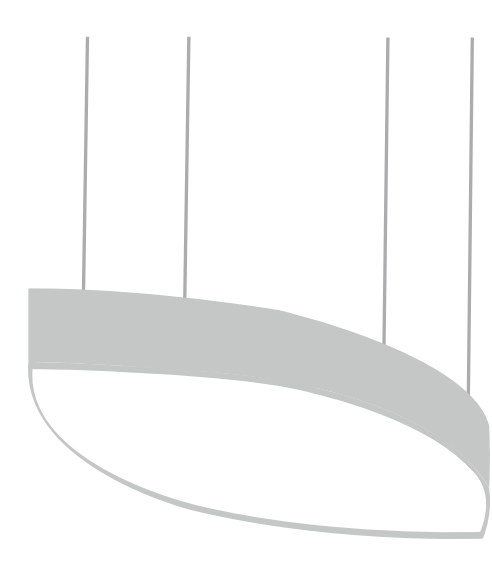

• Available in Red, Yellow, Blue, Cool White, Black Note: Customize shape, size and powder coating color available upon request.

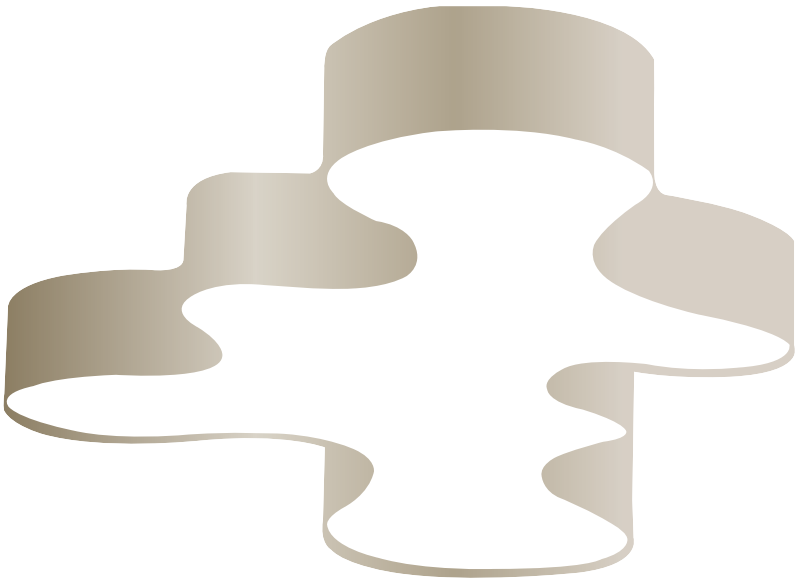

SWING

Product	Color Temperature	Watt	Voltage	Dimension(MM)
TR-LESW400PS30W	3000K/4000K/6000K	30W	100 - 285V AC, 50Hz	300X90
TR-LESW600PS40W	3000K/4000K/6000K	40W	100 - 285V AC, 50Hz	600X90
TR-LESW600PS40W	3000K/4000K/6000K	60W	100 - 285V AC, 50Hz	900X90
TR-LESW600PS40W	3000K/4000K/6000K	75W	100 - 285V AC, 50Hz	1200X90

• Available in Red, Yellow, Blue, Cool White, Black Note: Customize shape, size and powder coating color available upon request.

TRECO[®]
LIGHTING

Glowing through *Life*,
one LED at a time



In shades **of light**

Tejora is a balanced combination of the highest quality design, intelligent technologies and art, which provides extremely wide arrangement possibilities.

It's a collection which allows to create multi-coloured variants of luminaires. The combination of their different versions - suspended, wall and floor luminaires - allows for creating phenomenal lighting and decorative compositions.

The LED modules used in the luminaires ensure a high level of energy efficiency. The steel, robust, yet visually subtle housing can be painted in two different colours from the inspired by both inside and outside.

Tejora luminaires are also available with DALI control as option, which allows you to adjust the luminous flux. Our team of engineers and technologists can also program the luminaires according to the specific needs of investors and architects to enable light control in multi-luminaire compositions.

|| TEJORA COLLECTION ||

by Treco Lighting



04

different versions

- 01 **Tejora suspended**
Suspended version of the luminaire
- 02 **Tejora wall lamp**
Three lengths of wall lamps
- 03 **Tejora XS wall lamp**
Wall lamp
- 04 **Tejora free-standing version**
Free-standing version of the luminaire

ARCHITECTURAL LIGHTING



Tejora free-standing version


max.
104 lm/W IP20

Rated power [W]:	23 - 44
Luminous flux [lm]:	1300 - 4500
Mounting method:	free standing
Body material:	steel

Body colour:	all powderd coating colour available
Diffuser material:	PC
Diffuser type:	OPAL
Dimensions A/B [mm]:	1246/Ø220 1807/Ø260


Distinguishing features:

- Minimalist design crafted by Dorota Koziara
- The luminaires are available in all powderd coating colour available including multi-colour variants
- Versions with DALI control available



Light Your
World



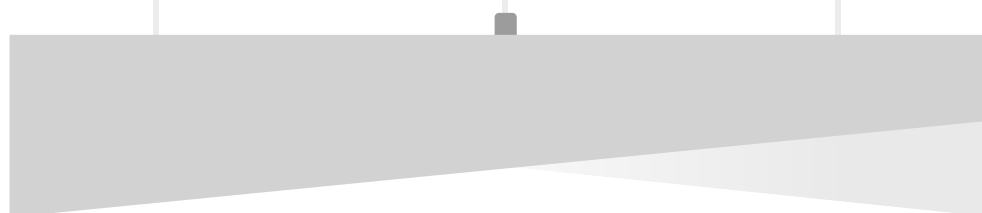

The world-famous designer has created a collection of LED luminaires for us. The idea of the project is to combine the magic of light with a highly energy-saving lighting system.


RAL= Powered Coated Dorota Koziara has a wide approach to design, as a designer she also deals with the promotion of design, company development strategy through design and design criticism. She's been designing for many renowned companies. For many years she has also been the curator and organiser of exhibitions promoting design in the international field.

Her works have been presented at numerous exhibitions in Poland and abroad, including in Milan, London, Paris, New York, Berlin, Tokyo and Zurich. She has been the laureate in the international sculpture competition "Third Millennium" in Italy for the installation of "12 Angels" in Tuscany, Italy.

———— **We support** your vision

TRECO[®]
LIGHTING



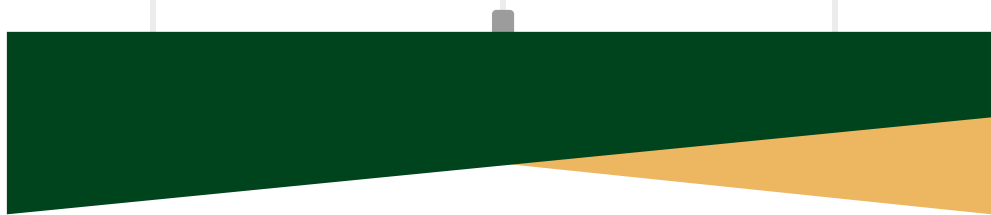

TEJORA

max.
106 lm/W IP20 

Rated power [W]: 18 - 64

Luminous flux [lm]: 670 - 5700

Mounting method: surface-mounted, wall-mounted, suspended

Body material: steel

Body colour: all powderd coating colour available


Diffuser material: PC

Diffuser type: OPAL

Dimensions A/B/C [mm]: 701/130/80, 1261/130/80, 1541/130/80

Distinguishing features:

- Minimalist design crafted by Dorota Koziara
- The luminaires are available in all powderd coating colour available including multi-colour variants
- Versions with DALI control available
- Adjustable suspension length

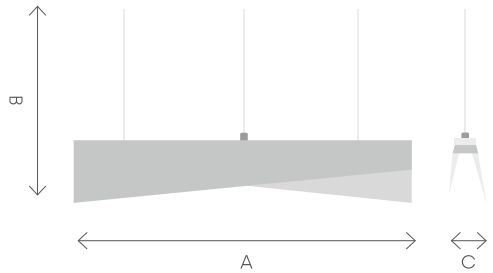

TRECO[®]
LIGHTING





TEJORA WALL LAMP


max.
95 lm/W IP20

Rated power [W]:	18 - 64
Luminous flux [lm]:	670 - 5700
Mounting method:	surface-mounted, wall-mounted
Body material:	steel

Body colour:	any from the RAL palette
Diffuser material:	PC
Diffuser type:	OPAL
Dimensions A/B/C [mm]:	701/128/106, 1261/128/106, 1541/128/106

Distinguishing features:

- Minimalist design crafted by Dorota Koziara
- The luminaires are available in all powderd coating colour available including multi-colour variants
- Versions with DALI control available

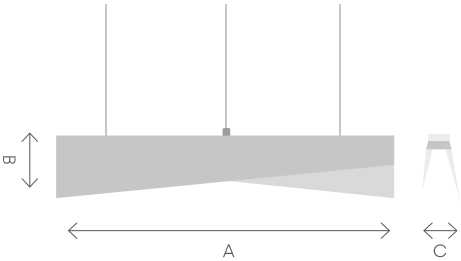

TRECO[®]
LIGHTING





TEJORA XS WALL LAMP


max.
95 lm/W IP20 

Rated power [W]:	2
Luminous flux [lm]:	59 - 100
Mounting method:	surface-mounted, wall-mounted
Body material:	steel

Body colour:	all powderd coating colour available
Diffuser material:	PC
Diffuser type:	OPAL
Dimensions A/B/C [mm]:	200/130/140

Distinguishing features:

- Minimalist design crafted by Dorota Koziara
- The luminaires are available in all powderd coating colour available including multi-colour variants
- Versions with DALI control available



OUTDOOR LIGHTS



DECK SINGLE

Product	Color Temperature	Watt	CRI	Power Factor
TR-LEDES6W	3000K/6000K	6W	>80	0.9
TR-LEDES9W	3000K/6000K	9W	>80	0.9
TR-LEDES12W	3000K/6000K	12W	>80	0.9



SOON

Product	Color Temperature	Watt	CRI	Power Factor
TR-LESO6W	3000K/6000K	6W	>80	0.9



DEUCE

Product	Color Temperature	Watt	CRI	Power Factor
TR-LEDE3W	3000K/6000K	3W	>80	0.9
TR-LEDE6W	3000K/6000K	6W	>80	0.9

• Available in Red, Green, Blue, Amber, Ice Blue Color

AQUA



Product	Color Temperature	Watt	CRI	Power Factor
TR-LEAQ3W	3000K/6000K	3W	>80	0.9
TR-LEAQ9W	3000K/6000K	9W	>80	0.9
TR-LEAQ14W	3000K/6000K	14W	>80	0.9
TR-LEAQ24W	3000K/6000K	24W	>80	0.9

MIC



Product	Color Temperature	Watt	CRI	Power Factor
TR-LEMI7W	3000K/6000K	7W	>80	0.9
TR-LEMI12W	3000K/6000K	12W	>80	0.9

MAV



Product	Color Temperature	Watt	CRI	Power Factor
TR-LEMI7W	3000K/6000K	7W	>80	0.9
TR-LEMI12W	3000K/6000K	12W	>80	0.9

• Available in Red, Green, Blue, Amber, Ice Blue Color

HALO

Product	Color Temperature	Watt	CRI	Power Factor
TR-LEHA7W	3000K/6000K	7W	>80	0.9
TR-LEHA9W	3000K/6000K	9W	>80	0.9



NATE

Product	Color Temperature	Watt	CRI	Power Factor
TR-LENA9W	3000K/6000K	9W	>80	0.9
TR-LENA12W	3000K/6000K	12W	>80	0.9



KRIP

Product	Color Temperature	Watt	CRI	Power Factor
TR-LEKR12W	3000K/6000K	12W	>80	0.9
TR-LEKR18W	3000K/6000K	18W	>80	0.9



FITT

Product	Color Temperature	Watt	CRI	Power Factor
TR-LEFI12W	3000K/6000K	12W	>80	0.9
TR-LEFI18W	3000K/6000K	18W	>80	0.9



POSE

Product	Color Temperature	Watt	CRI	Power Factor
TR-LEPO12W	3000K/6000K	12W	>80	0.9
TR-LEPO18W	3000K/6000K	18W	>80	0.9



• Available in Red, Green, Blue, Amber, Ice Blue Color


OWER

Product	Color Temperature	Watt	CRI	Power Factor
TR-LEOW12W	3000K/6000K	12W	>80	0.9
TR-LEOW18W	3000K/6000K	18W	>80	0.9



JETTER

Product	Color Temperature	Watt	CRI	Power Factor
TR-LEJE6W	3000K/6000K	6W	>80	0.9
TR-LEJE10W	3000K/6000K	10W	>80	0.9

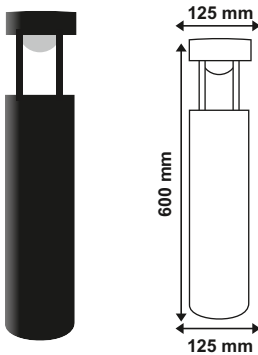


PICKET

Product	Color Temperature	Watt	CRI	Power Factor
TR-LEPI5W	3000K/6000K	5W	>80	0.9
TR-LEPI10W	3000K/6000K	10W	>80	0.9



TAPPER

Product	Color Temperature	Watt	CRI	Power Factor
TR-LETA8W	3000K/6000K	8W	>80	0.9
TR-LETA16W	3000K/6000K	16W	>80	0.9

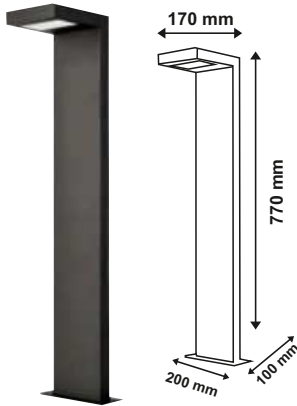

• Available in Red, Green, Blue, Amber, Ice Blue Color

WALL ELEVATION / STEP LIGHTS LENS MODEL




GARDEN SPIKE LIGHT

Item	Model No.	Input Volt.		Outer Size (mm)	LED Chip	Material	CCT	
2 Way Lens Mode	TR-LENS2WAY	90-265V		75 x 75 x 50	Epistar/Osram	Aluminum	2700-6500	
4 Way Lens Mode	TR-LENS4WAY	90-265V		75 x 75 x 50	Epistar/Osram	Aluminum	2700-6500	
Item	Model No.	Power	Input Volt.	Outer Size (mm)	COB Size	Material	CCT	
3W K Light 1 Way	TR-KLIGHT03	3W	90-265V	80 x 80 x 65	11mm	Aluminum	2700-6500	
6W K Light 2 Way	TR-KLIGHT06	6W	90-265V	145 x 80 x 65	11mm	Aluminum	2700-6500	
Item	Model No.	Power	Input Volt.	Outer Size (mm)	Cut Size (mm)	Material	CCT	
3W LED STEP Ligh	TR-STEP03	3W	90-265V	85 x 85 x 50	67 x 67	Aluminum+	2700-6500	
6W LED STEP Ligh	TR-STEP06	6W	90-265V	145 x 70 x 55	135 x 65	Aluminum	2700-6500	
Item	Model No.	Power	nput Volt.	Outer Size (mm)	Type	COB Size	Material	CCT
5W SPIKE Light	TR-SPIKE05	5W	90-265V	55 x 90	COB	11mm	Aluminum	2700-6500
7W SPIKE Light	TR-SPIKE07	7W	90-265V	55 x 90	COB	11mm	Aluminum	2700-6500
10W SPIKE Light	TR-SPIKE10	10W	90-265V	65 x 120	COB	11mm	Aluminum	2700-6500
12W SPIKE Light	TR-SPIKE12	12W	90-265V	65 x 120	COB	11mm	Aluminum	2700-6500
15W SPIKE Light	TR-SPIKE15	15W	90-265V	80 x 110	COB	11mm	Aluminum	2700-6500
20W SPIKE Light	TR-SPIKE20	20W	90-265V	80 x 110	COB	11mm	Aluminum	2700-6500

• Available in Cool White, Neutral White & Warm White, Green, Blue, Red & Pink

SKD, Housing & Spares also available

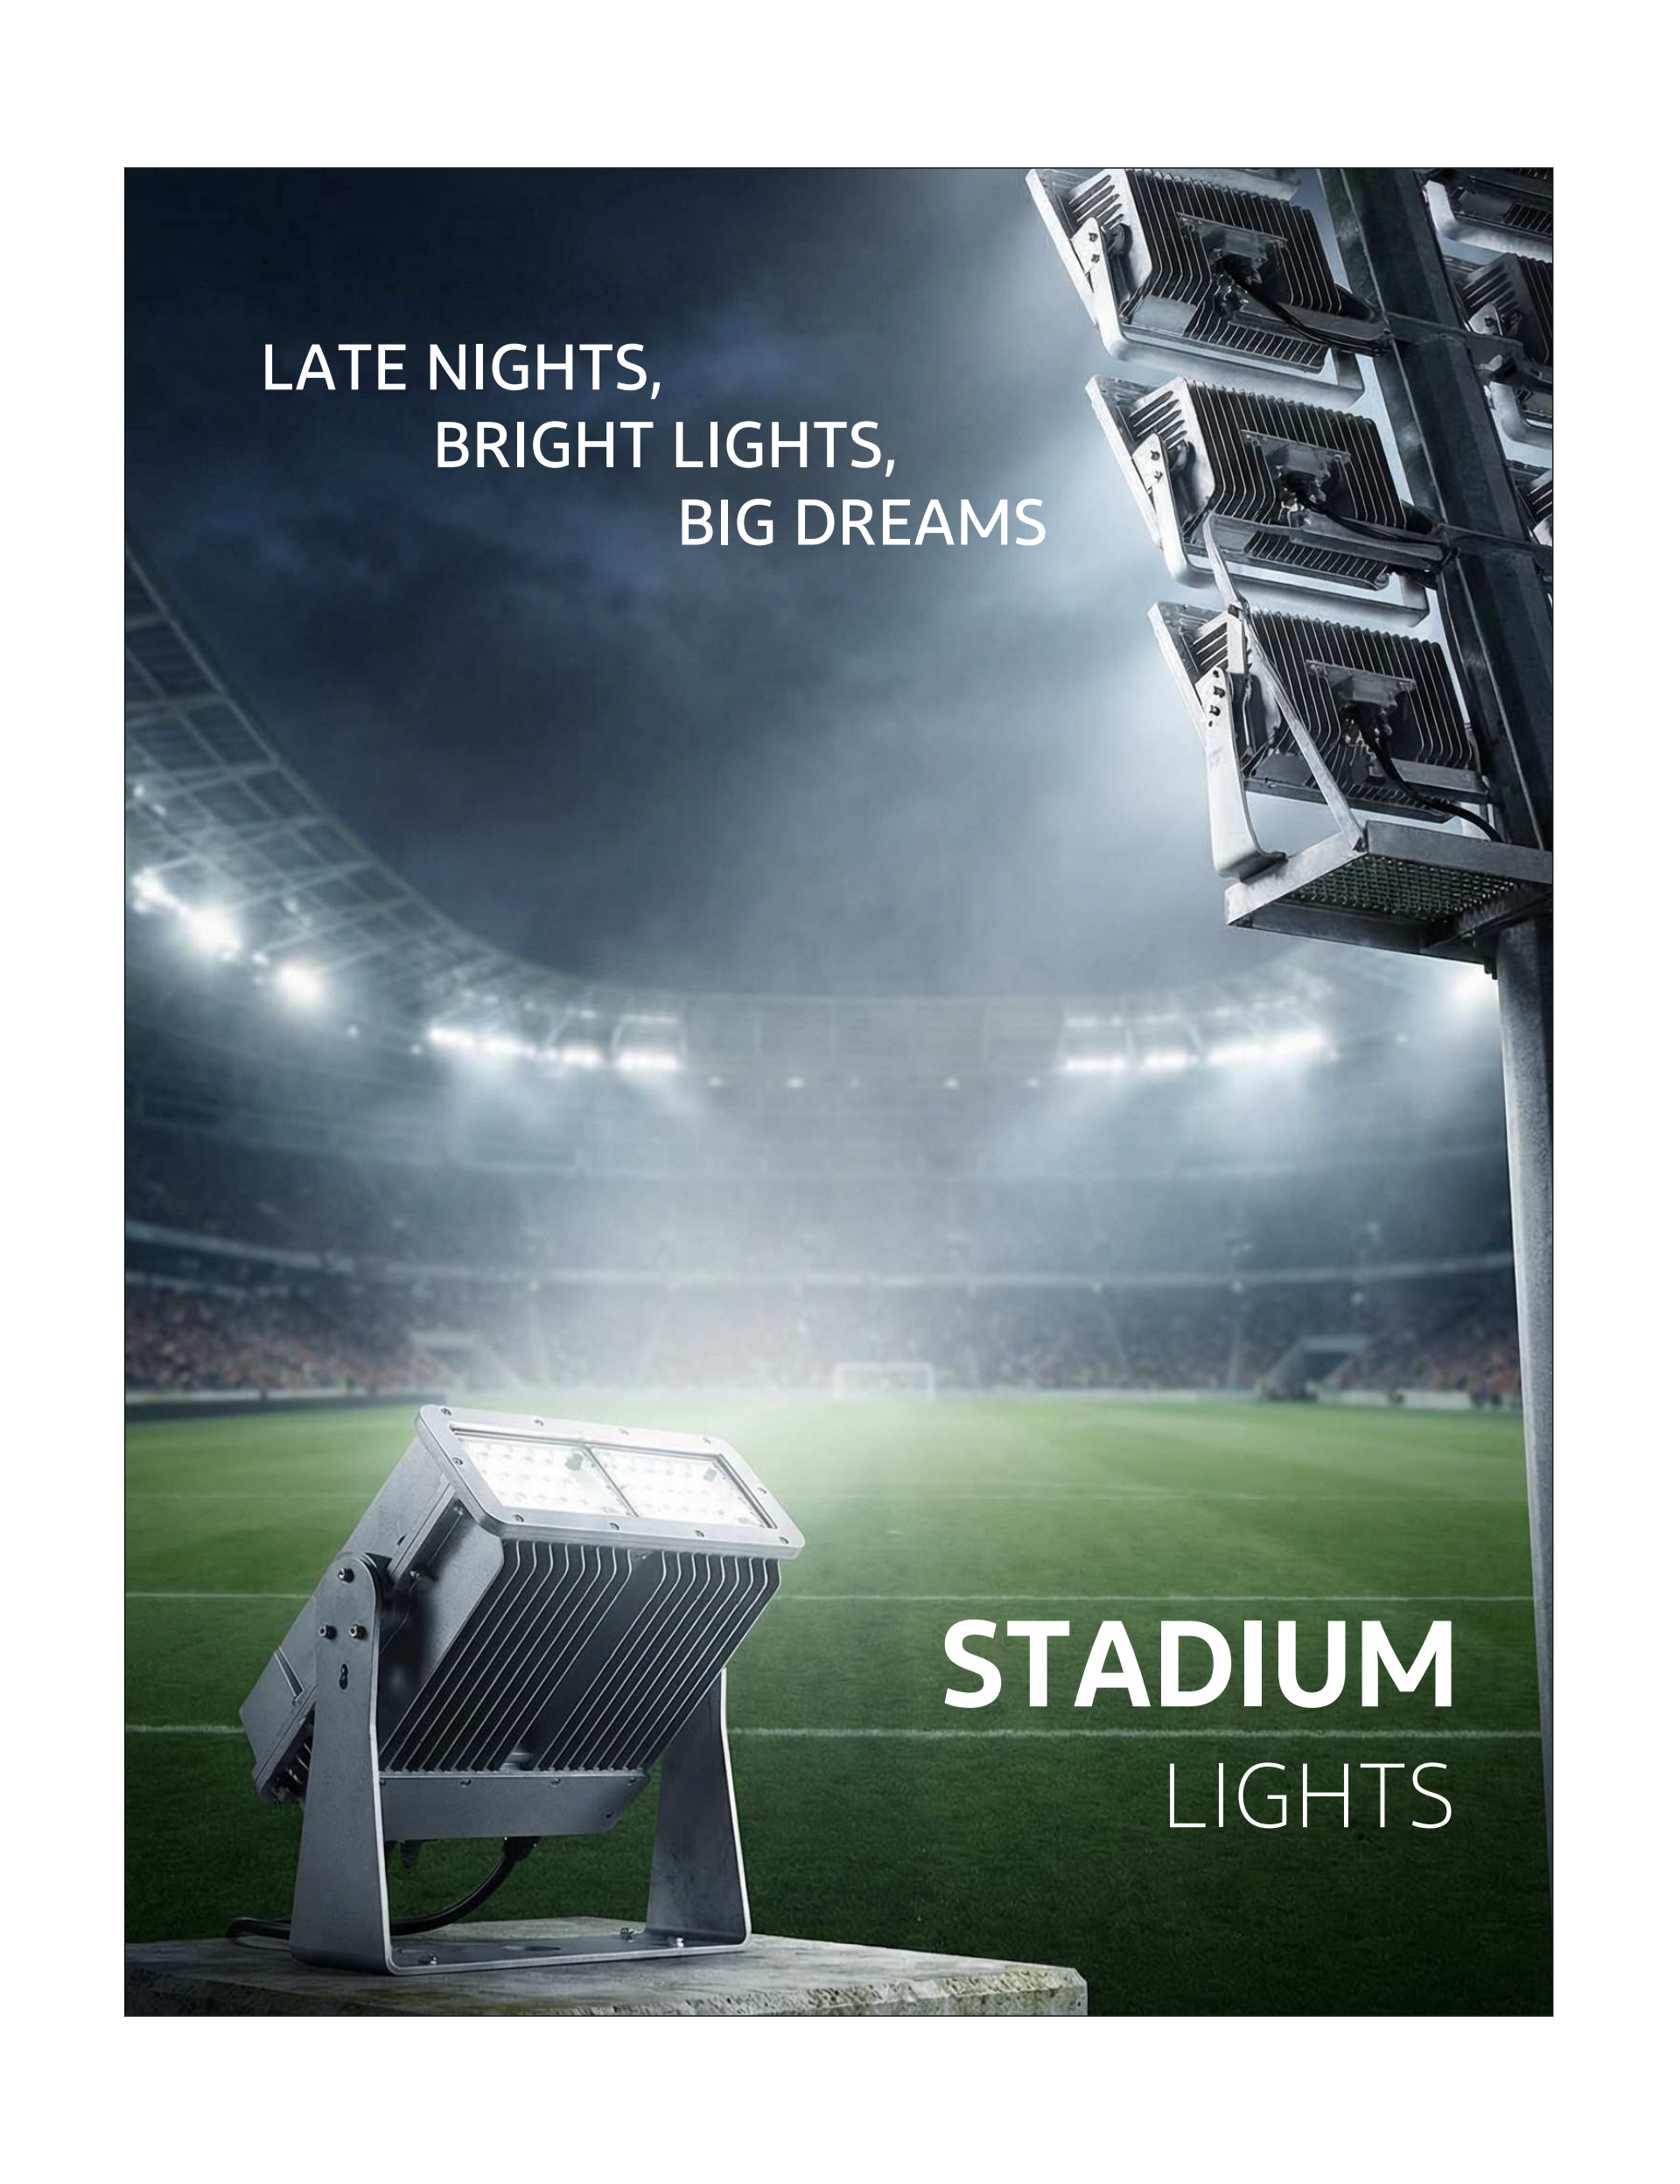

LATE NIGHTS,
BRIGHT LIGHTS,
BIG DREAMS

STADIUM
LIGHTS



STADIUM TOWER LIGHTS



IP65


Item	Model No.	Power	Input Volt.	LED	No. of LED	Lumens*	Size(mm)	Beam Angle
400W Stadium Flood Light	STADIUMFLOOD400	400W	90-265V	3030 1W	470	40000	420x380x450	90°
800W Stadium Flood Light	STADIUMFLOOD800	800W	90-265V	3030 1W	940	80000	450x450x450	90°

• Available in Cool White, Neutral White & Warm White

SKD, Housing & Spares also available

“With the **Government of India's** visionary green energy mission,
“**SOLAR POWER**” is leading the nation
toward a clean, secure, and self-reliant future.”

S  **LAR**
LIMITLESS, RENEWABLE & EVER FLOWING

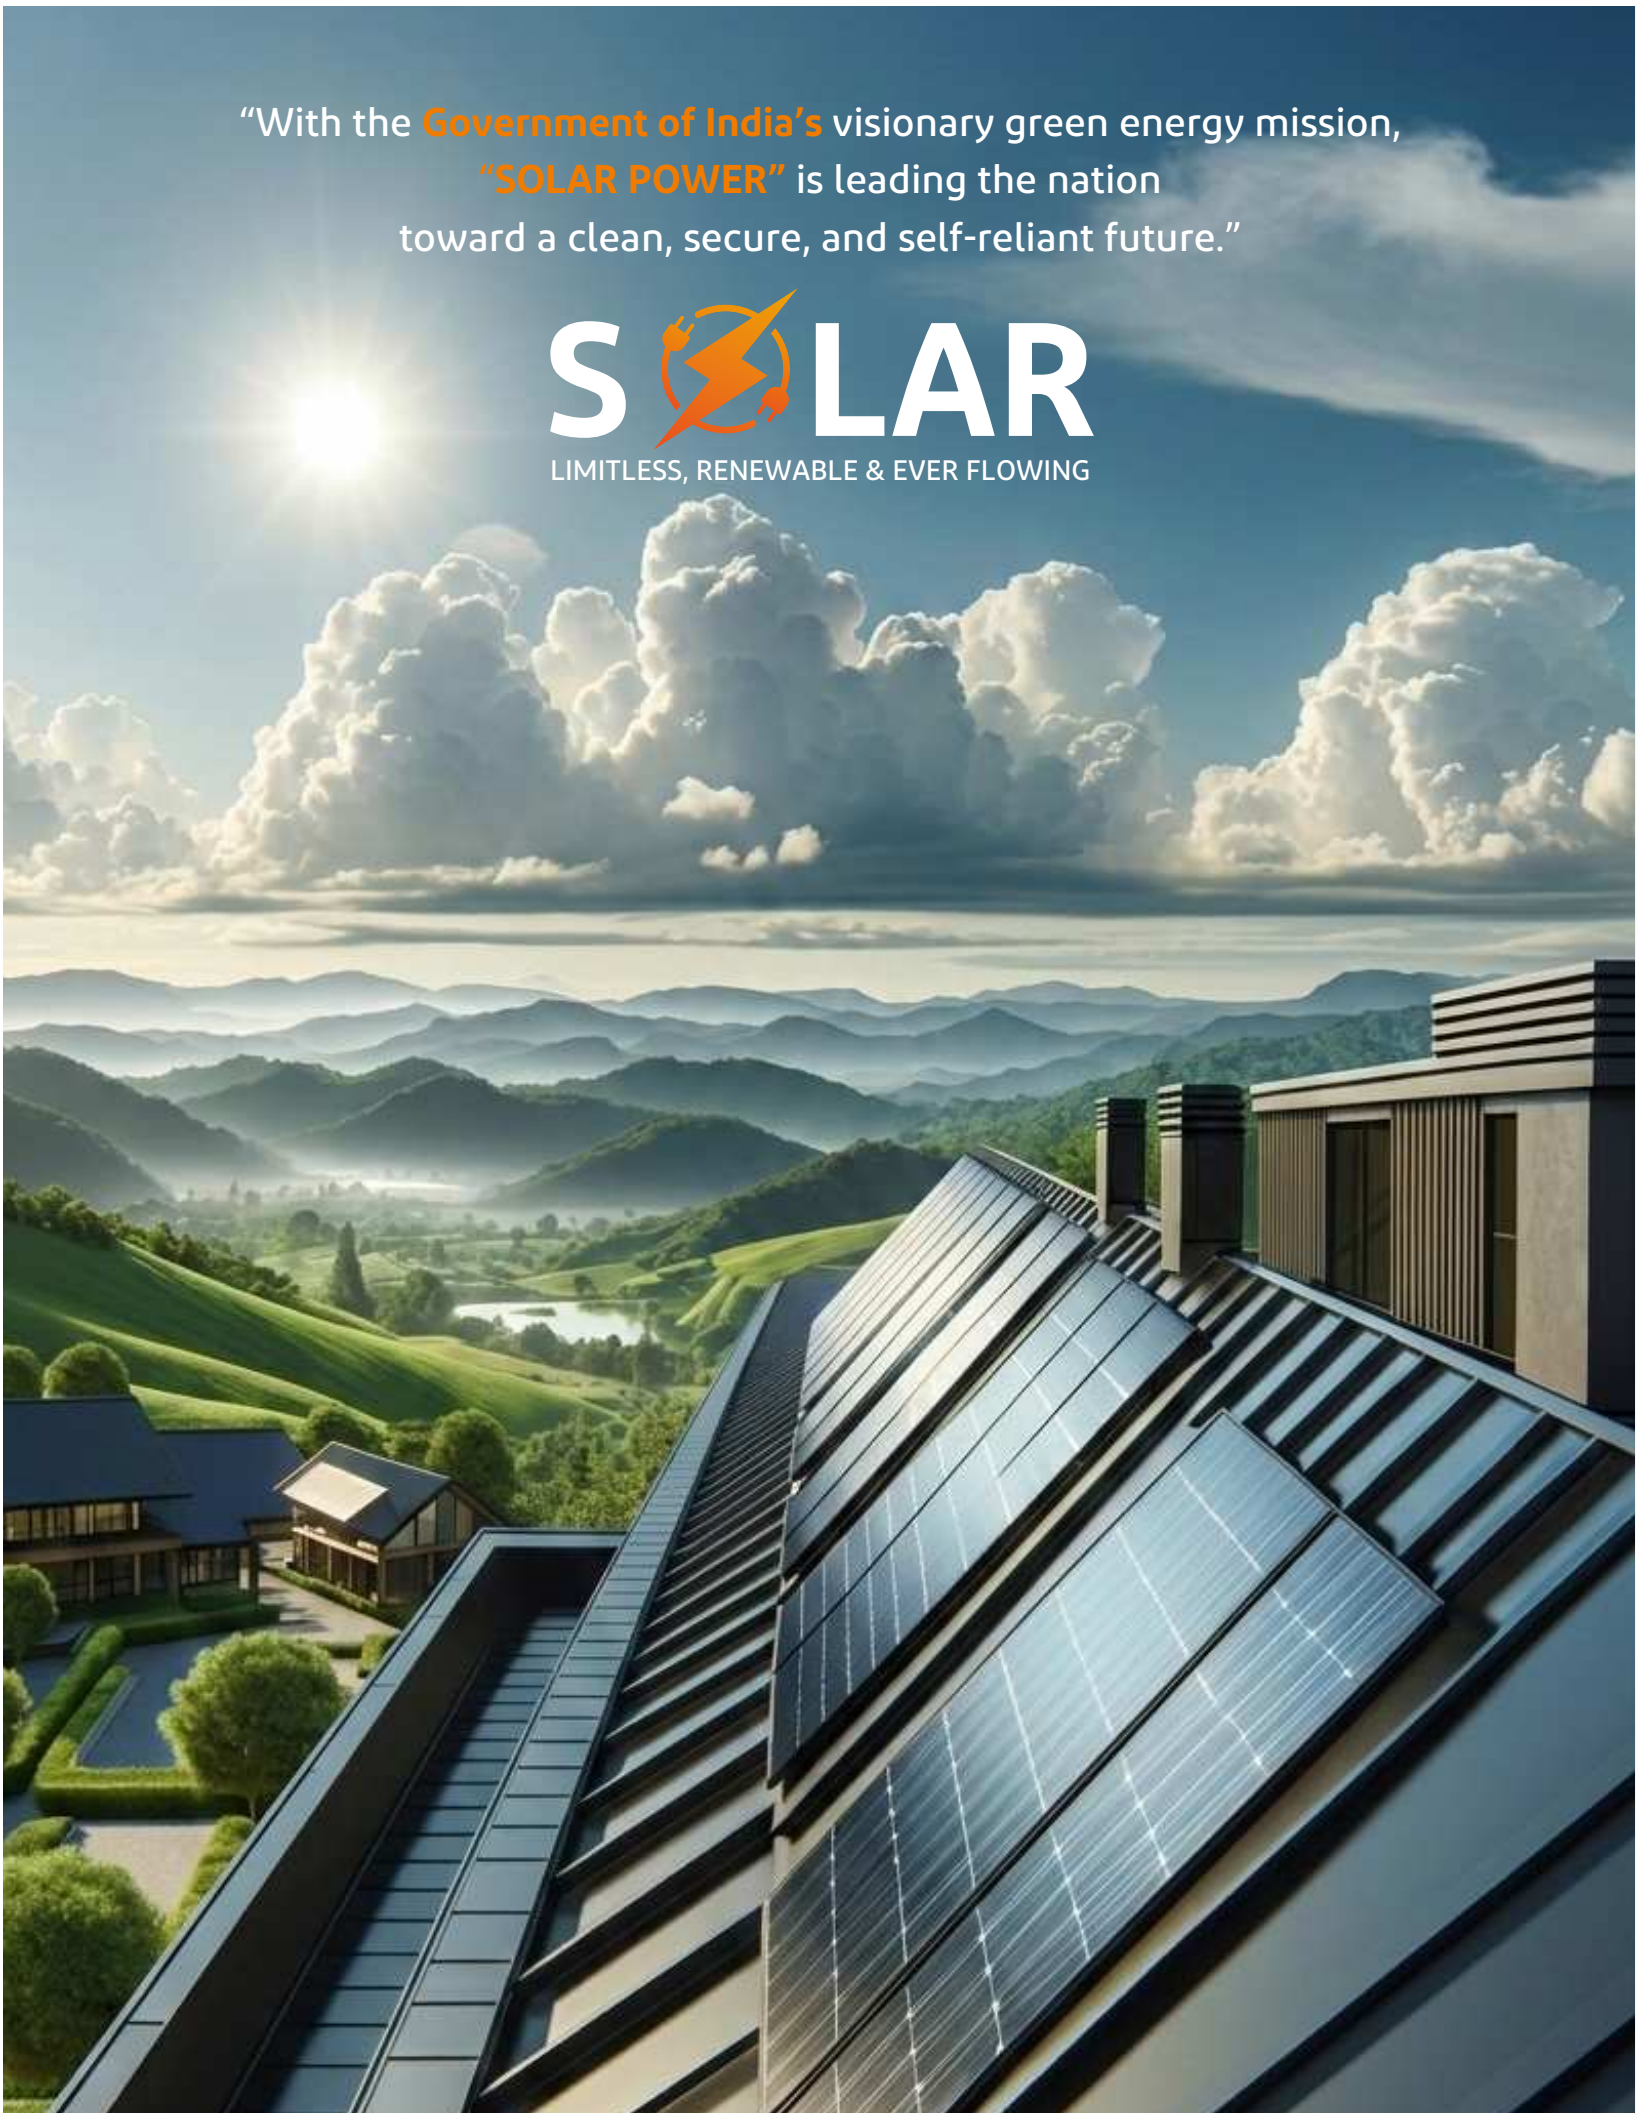

SOLAR FLOOD LIGHTS



SOLAR FLOOD LIGHT 20W	SOLAR FLOOD LIGHT 30W	SOLAR FLOOD LIGHT 40W
MODEL : FLSOLAR-CITY20	MODEL : FLSOLAR-CITY30	MODEL : FLSOLAR-CITY40
LED : 332Pcs 5730	LED : 416Pcs 5730	LED : 800Pcs 5730
LED POWER : 160W	LED POWER : 210W	LED POWER : 400W
PANEL : 5V 20W POLY	PANEL : 5V 30W POLY	PANEL : 5V 35W POLY
BATTERY : 3.2V 20Ah LiFePo4	BATTERY : 3.2V 25A LiFePo4	BATTERY : 3.2V 36A LiFePo4
CHARGING TIME : 6-8HRS	CHARGING TIME : 6-8HRS	CHARGING TIME : 6-8HRS
LIGHTING TIME : 12-16HRS	LIGHTING TIME : 12-16HRS	LIGHTING TIME : 12-16HRS
LIGHT COLOUR : COOL WHITE	LIGHT COLOUR : COOL WHITE	LIGHT COLOUR : COOL WHITE
SIZE : 260 x 330 x 80	SIZE : 288 x 365 x 80	SIZE : 450 x 360 x 110

REMOTE

Auto: 100% lighting up at the first 20mins, 70% for 4.5hrs and 30% for remaining hours.

On/Off: Light on and off(no working for light Sensor)

3H: Set up for 3 hours lighting up, after 3 hours light off.

5H: Set up for 5 hours lighting up, after 5 hours light off.

8H: Set up for 8 hours lighting up, after 8 hours light off.

Half light: Set up for 50% lighting up-**Full light:** Set up for 100% lighting up.



SOLAR FLOOD LIGHT 20W	SOLAR FLOOD LIGHT 30W
MODEL : FLSOLARINT20	MODEL : FLSOLARINT30
LED POWER : 160W	LED POWER : 210W
PANEL : 5V 20W POLY	PANEL: 5V 30W POLY
BATTERY : 3.2V 20A LiFePo4	BATTERY : 3.2V 30A LiFePo4
CHARGING TIME : 6-8HRS	CHARGING TIME : 6-8HRS
LIGHTING TIME : 12HRS	LIGHTING TIME : 12HRS
LIGHT COLOUR : COOL WHITE	
SIZE : 320 x 250 x 80	SIZE : 340 x 280 x 95

REMOTE

Auto: 100% lighting up at the first 20mins, 70% for 4.5hrs and 30% for remaining hours.

On/Off: Light on and off(no working for light Sensor)

3H: Set up for 3 hours lighting up, after 3 hours light off.

5H: Set up for 5 hours lighting up, after 5 hours light off.

8H: Set up for 8 hours lighting up, after 8 hours light off.

Half light: Set up for 50% lighting up-**Full light:** Set up for 100% lighting up.

• Lighting Time Depends on Working Mode & Battery Charging

SOLAR WALL LIGHT




MODEL NO.	LED	LED Power	Panel	Battery	Charging Time	Lighting Time*	Size(mm)	Sensor
SOLAR WALL05	20LED EPISTAR	5W	5V 0.65W Poly	3.7V 1.2A Lithium	8 Hrs.	8-10 Hrs.	98 x 125 x 50	Automatic Sensor Activate in Darkness
SOLAR WALL10	228LED EPISTAR	10W	5V 1W Poly	3.7V 1.5A Lithium	8 Hrs.	8-10 Hrs.	160 x110 x 55	Automatic Sensor Activate in Darkness

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING



TRECO[®]
LIGHTING

NO ERA OF
LIGHTING
SOLUTION

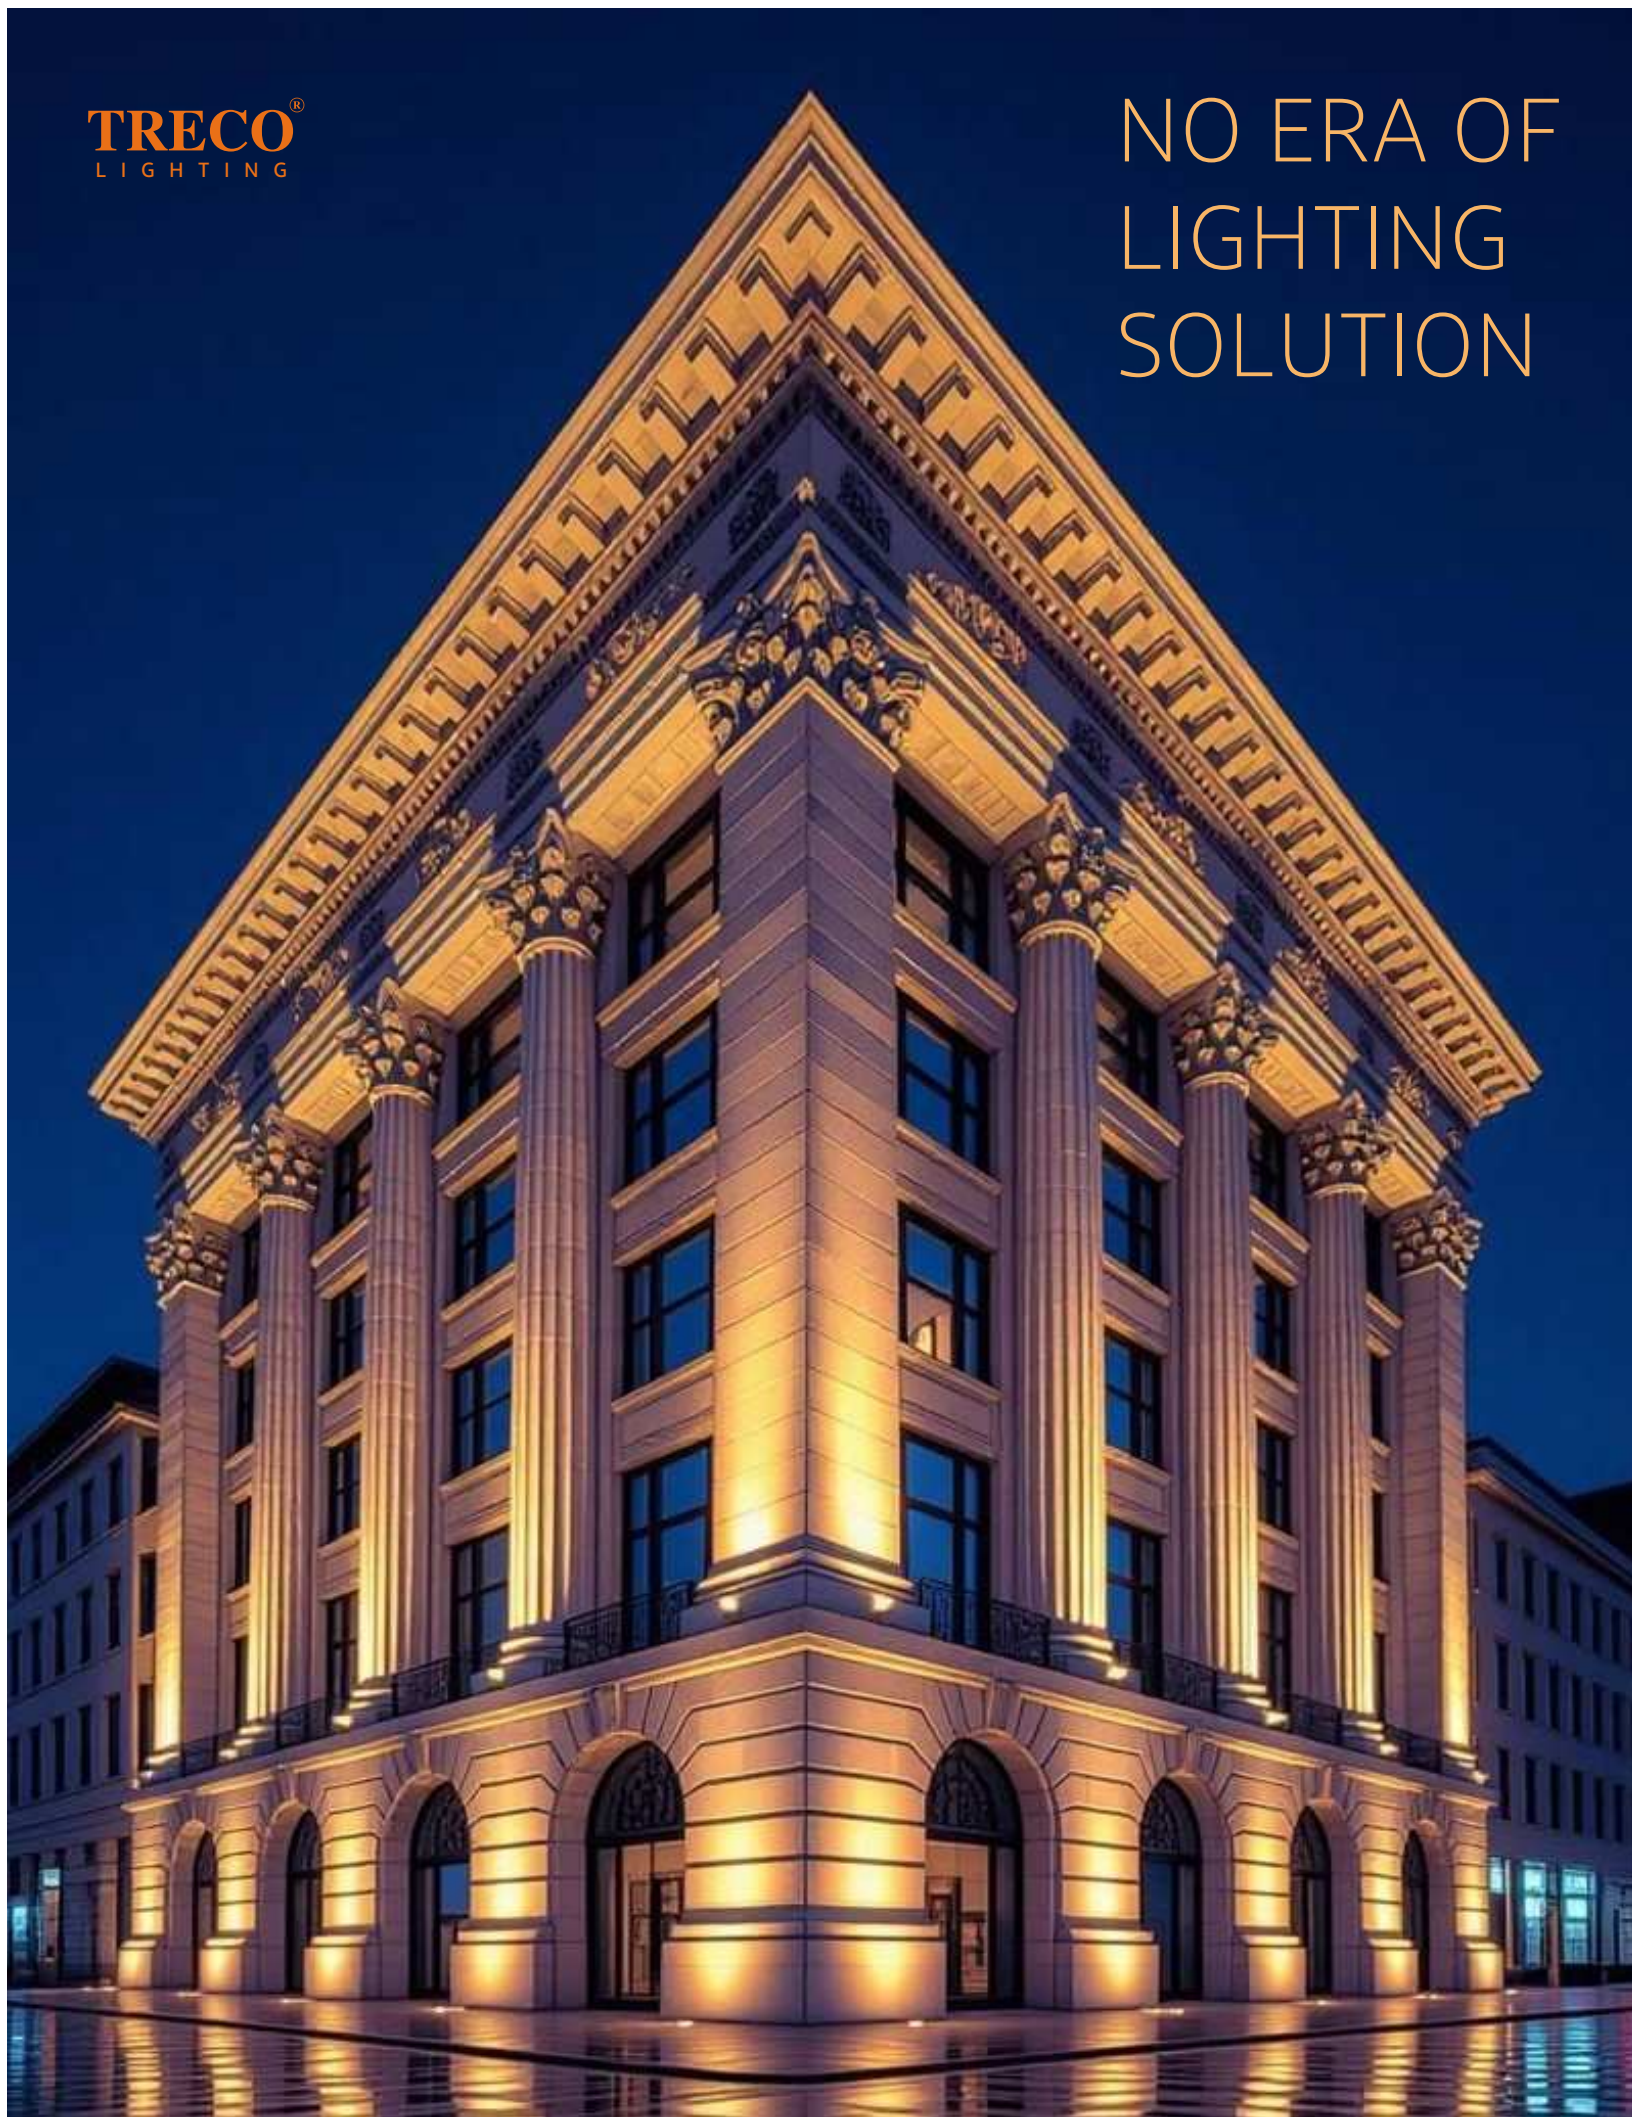

WALL WASHER LIGHT



Item	Model No.	Power	Input Volt.	Size	No. of LED	Beam Angle	Color	Remarks
36W WALL WASHER	TR-WW-36W-220V	36W	220V AC	1 Meter	3030 36Pcs.	30°	3000K, RGB	RGB With Remote
36W WALL WASHER	TR-WW-36W-24V	36W	24V DC	1 Meter	3030 36Pcs.	30°	3000K	Linkable
36W WALL WASHER	TR-WW-36W-24V-DMX	36W	24V DC	1 Meter	3030 36Pcs.	30°	RGBW	DMX Controlled

FACADE COLUMN LIGHT



• Available in Cool White, Neutral White, Warm White, Red, Green, Blue & Pink

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Type	COB Size	Material	Beam Angle
10W COLUMN LIGHT	TR-COLUMNLIGHT-10	10W	90-265V	70 x 130	COB	11mm	Aluminum	7°



BURIAL LIGHT

Item	Model No.	Power	Input Volt.	Outer Size (mm)	Cut Size (mm)	No. of LED	Beam Angle	Color	Remarks
3W BURIAL LIGHT	TR-BURIAL-3W	3W	220V AC	100*90	95	3030 3Pcs.	30°	WW	RGB With Remote
6W BURIAL LIGHT	TR-BURIAL-6W	6W	220V AC	120*90	115	3030 6Pcs.	30°	WW, RGB	RGB With Remote
9W BURIAL LIGHT	TR-BURIAL-9W	9W	220V AC	150*90	125	3030 9Pcs.	30°	WW, RGB	RGB With Remote
12W BURIAL LIGHT	TR-BURIAL-12W	12W	220V AC	180*90	155	3030 12Pcs.	30°	WW, RGB	RGB With Remote



UNDERWATER SPOT LIGHTS

Item	Model No.	Power	Input Volt.	Outer Size (mm)	No. of LED	Beam Angle	Material	Color	Remarks
3W UNDERWATER SPOT LIGHT	TR-UW-SPOT-3W	3W	24V AC/DC	82 x 140	3030 3Pcs.	30°	SS304	WW, BLUE	RGB With Remote
6W UNDERWATER SPOT LIGHT	TR-UW-SPOT-6W	6W	24V AC/DC	120 x 140	3030 6Pcs.	30°	SS304	WW, BLUE, RGB	RGB With Remote
9W UNDERWATER SPOT LIGHT	TR-UW-SPOT-9W	9W	24V AC/DC	145 x 180	3030 9Pcs.	30°	SS304	WW, BLUE, RGB	RGB With Remote
12W UNDERWATER SPOT LIGHT	TR-UW-SPOT-12W	12W	24V AC/DC	160 x 215	3030 12Pcs.	30°	SS304	WW, BLUE, RGB	RGB With Remote

FLOOD LIGHT

Slim Model- IP 65



IP 65

Item	Model No.	Power	Input Volt.	LED	No. of LED	Lumens*	Size (mm)
50W Flood Light	TR-FLSLIM50	50W	90-265V	2835 0.5W	120	5000	225 x 225 x 50
100W Flood Light	TR-FLSLIM100	100W	90-265V	2835 0.5W	240	10000	285 x 285 x 65
150W Flood Light	TR-FLSLIM150	150W	90-265V	2835 0.5W	360	15000	285 x 320 x 80
200W Flood Light	TR-FLSLIM200	200W	90-265V	2835 0.5W	480	20000	350 x 320 x 80




Slim Model - IP 65

Item	Model No.	Power	Input Volt.	LED Type	No. of COB	Size (mm)
50W RGB Flood Light	TR-FLSLIMRGB50	50W	90-265V	RGB COB	1	225 x 225 x 50
100W RGB Flood Light	TR-FLSLIMRGB100	100W	90-265V	RGB COB	2	285 x 285 x 65



• Available in Cool White, Neutral White, Warm White, Red, Green, Pink & Blue

STAIRCASE STEP LIGHT CONTROLLER

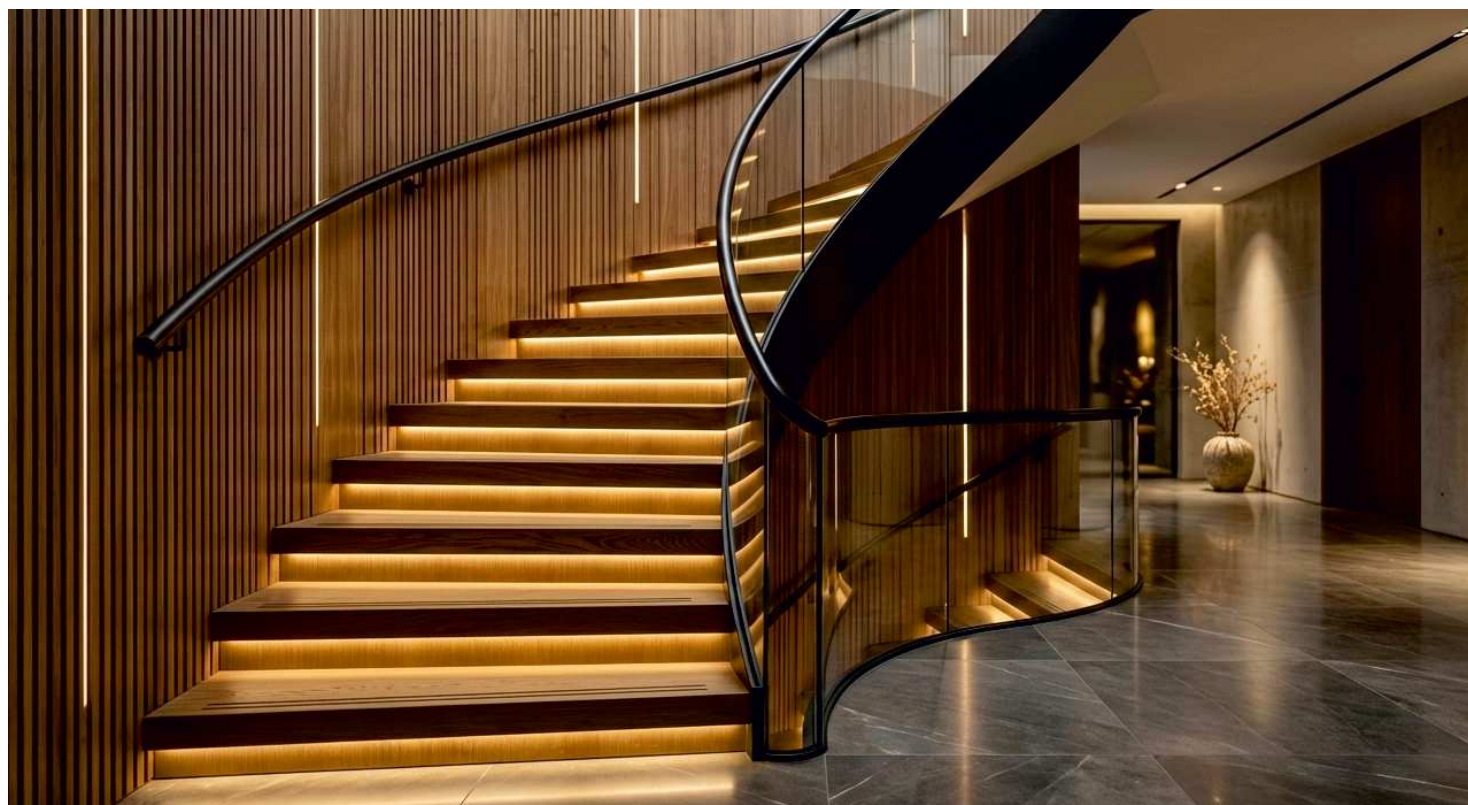

32 CHANNEL STAIRCASE SENSOR CONTROLLER

CONTROLLER SPECIFICATION



32 Step

MODEL: GSR-V2-STEP-1002
INPUT VOLT. : DC 12V/24V
OUTPUT VOLT. : DC 12V/24V
MAX. LOAD : 12V-15W/Step(Max.300W)
 24V-20W/Step(Max.400W)
NO. OF STEP : 32
PIR SENSOR : INCLUDED (2 Pcs.)
SENSING DISTANCE : 0.1-2M
SIZE : 185X78X25MM
FEATURES: SPEED CONTROL
 STEP CONTROL

32 Step+IC Strip

MODEL: GSR-V2-STEP-1003
INPUT VOLT. : DC 12V/24V
OUTPUT VOLT. : DC 12V/24V
MAX. LOAD : 12V-15W/Step(Max.300W)
 24V-20W/Step(Max.400W)
 12V-150W/Running Strip
 24V-200W/Running Strip
NO. OF STEP : 32
PIR SENSOR : INCLUDED (2 Pcs.)
SENSING DISTANCE : 0.1-2M
SIZE : 185X78X25MM
FEATURES: SPEED CONTROL
 STEP CONTROL

Cove/Neon Strip Light/Rope Light



Model No.	LED	LED QTY/M	WATTAGE/M	INPUT VOLT.	Colors	PCB Width	IP20/65	Packing
TR-TRE-220V-ROPE-120L-IP65	2835	120	6.5W	220V	Warm White	6mm	IP65	50M Per Roll
TR-TRE-24V-NEON1616-120L-IP65	2835	120	10W	24V	Warm White	8mm	IP65	50M Per Roll
TR-TRE-24V-COB-320L-IP20	2835	320	20W	24V	Warm White	10mm	IP20	10M Per Roll
TR-TRE-12V-2835-60L-IP20	2835	60	7W	12V	Warm White	8mm	IP20	5M Per Roll
TR-TRE-12V-5050-60L-IP20	5050	60	12W	12V	Warm White	10mm	IP20	5M Per Roll
TR-TRE-12V-2835-120L-IP20	2835	120	10W	12V	Warm White	8mm	IP20	5M Per Roll
TR-TRE-12V-2835-180L-IP20	2835	180	15W	12V	Warm White	10mm	IP20	5M Per Roll
TR-TRE-12V-2835-240L-IP20	2835	240	20W	12V	Warm White	10mm	IP20	5M Per Roll
TR-TRE-12V-2835-60L-IP65	2835	60	7W	12V	Warm White	8mm	IP65	5M Per Roll
TR-TRE-12V-2835-120L-IP65	2835	120	10W	12V	Warm White	8mm	IP65	5M Per Roll
TR-TRE-12V-5050-60L-RGB-IP20	5050	60	12W	12V	RGB	10mm	IP20	5M Per Roll

STRIP DIMMER & CONTROLLER

Model No.	Output Volt. (DC)	Input Volt.	Capacity	Remote
12V RGB Controller	12V 2A Each Colour	12V DC	Max 5m	YES
12V/24V Single Colour Dimmer	12V/24V 30A	12V/24V DC	Max 30A	YES



CONSTANT VOLTAGE DRIVERS (12v/24v)

Model No.	Output Volt. (DC)	Current	Power	Input Volt.	Efficiency	Size (mm)*
TR-EXDR12V3A36W	12V	3A	36W	110-265	≥81%	85x59x33
TR-EXDR12V5A60W	12V	5A	60W	110-265	≥82%	170x78x37
TR-EXDR12V8A100W	12V	8.3A	100W	110-265	≥83%	160x98x42
TR-EXDR12V15A180W	12V	15A	180W	110-265	≥83%	200x98x42
TR-EXDR24V8A200W	24V	8.3A	200W	110-265	≥87%	162x50x25
TR-EXDR24V16A200W RAIN PROOF	24V	16.6A	400W	110-265	≥88%	172x117x46



READY PROFILE FOR CABINETS
& WARDROBES




CUT FROM ANYWHERE




MODEL NO.	LED	LED QTY/M	WATTAGE/M	INPUT VOLT.	CCT	SIZE	LENGTH
PROFILE-1010A-12V-1M	2835	120	7W	12V	WW/NW	10x10mm	1m
PROFILE-1010A-12V-3M	2835	120	7W	12V	WW/NW	10x10mm	3m

• Available in Cool White, Neutral White & Warm White


SKD, Housing & Spares also available




001-TRE-S1012




002-TRE-S1313




003-TRE-S2010




004-TRE-S0619




005-TRE-S2609




006-TRE-S2310




064-TRE-R1410




065-TRE-R0609




066-TRE-R3012




067-TRE-R3015




068-TRE-R4609




007-TRE-S0809




010-TRE-S1606




069-TRE-R0809




073-TRE-R1606




037-TRE-S2607




038-TRE-S1530




039-TRE-S3213




040-TRE-S1806




041-TRE-S2110




042-TRE-S1324




043-TRE-S3416




044-TRE-S3416




045-TRE-S4716




046-TRE-S4716




047-TRE-S2226




048-TRE-S2230




049-TRE-S3230




050-TRE-S1920




112-TRE-R5109




113-TRE-R7034




114-TRE-R3134




115-TRE-R1512




116-TRE-R3017




117-TRE-R2012



118-TRE-R1318




119-TRE-R1625




122-TRE-R2610


SURFACE MOUNT PROFILE




007-TRE-S0809




008-TRE-S1310




009-TRE-S1214




010-TRE-S1606




011-TRE-S1612




012-TRE-S1618




013-TRE-S2512




014-TRE-S2518




015-TRE-S2418




016-TRE-S2525




017-TRE-S3520




018-TRE-S3713




019-TRE-S3535




020-TRE-S5020




021-TRE-S5035




022-TRE-S5050




023-TRE-S7535




024-TRE-S6080



025-TRE-S2530




026-TRE-S2525




063-TRE-S4142




SURFACE MOUNT CORNER PROFILE




027-TRE-S1616




028-TRE-S1818




029-TRE-1919




030-TRE-S3030




030-TRE-S3030




031-TRE-S2629




032-TRE-S2926




033-TRE-S6040



034-TRE-S8060




035-TRE-S8042




036-TRE-S5151




SURFACE MOUNT ON WALL PROFILE




001-TRE-S1012




006-TRE-S2310




051-TRE-S8536




052-TRE-S3461




053-TRE-S3357



054-TRE-S6526




055-TRE-S3225




056-TRE-S3040


SKIRTING & STEP PROFILE




005-TRE-S2710




057-TRE-S1558




058-TRE-S26106




059-TRE-S1880



060-TRE-S5521




061-TRE-S6430



062-TRE-S3212




123-TRE-R3280




001-TRE-R7018


ASYMMETRIC & COVE PROFILE




010-TRE-S1606




013-TRE-S2512




027-TRE-S1616




028-TRE-S1818




029-TRE-1919




033-TRE-S6040




034-TRE-S8060




035-TRE-S8042




039-TRE-S3213




089-TRE-S4322





091-TRE-R1335




092-TRE-R3545

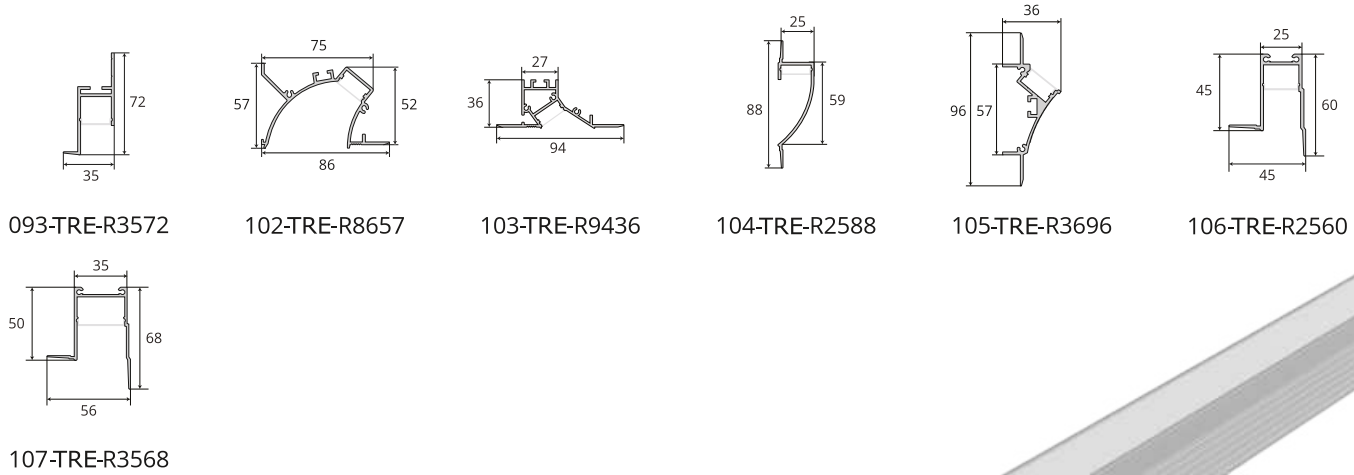


RECESSED MOUNT PROFILE

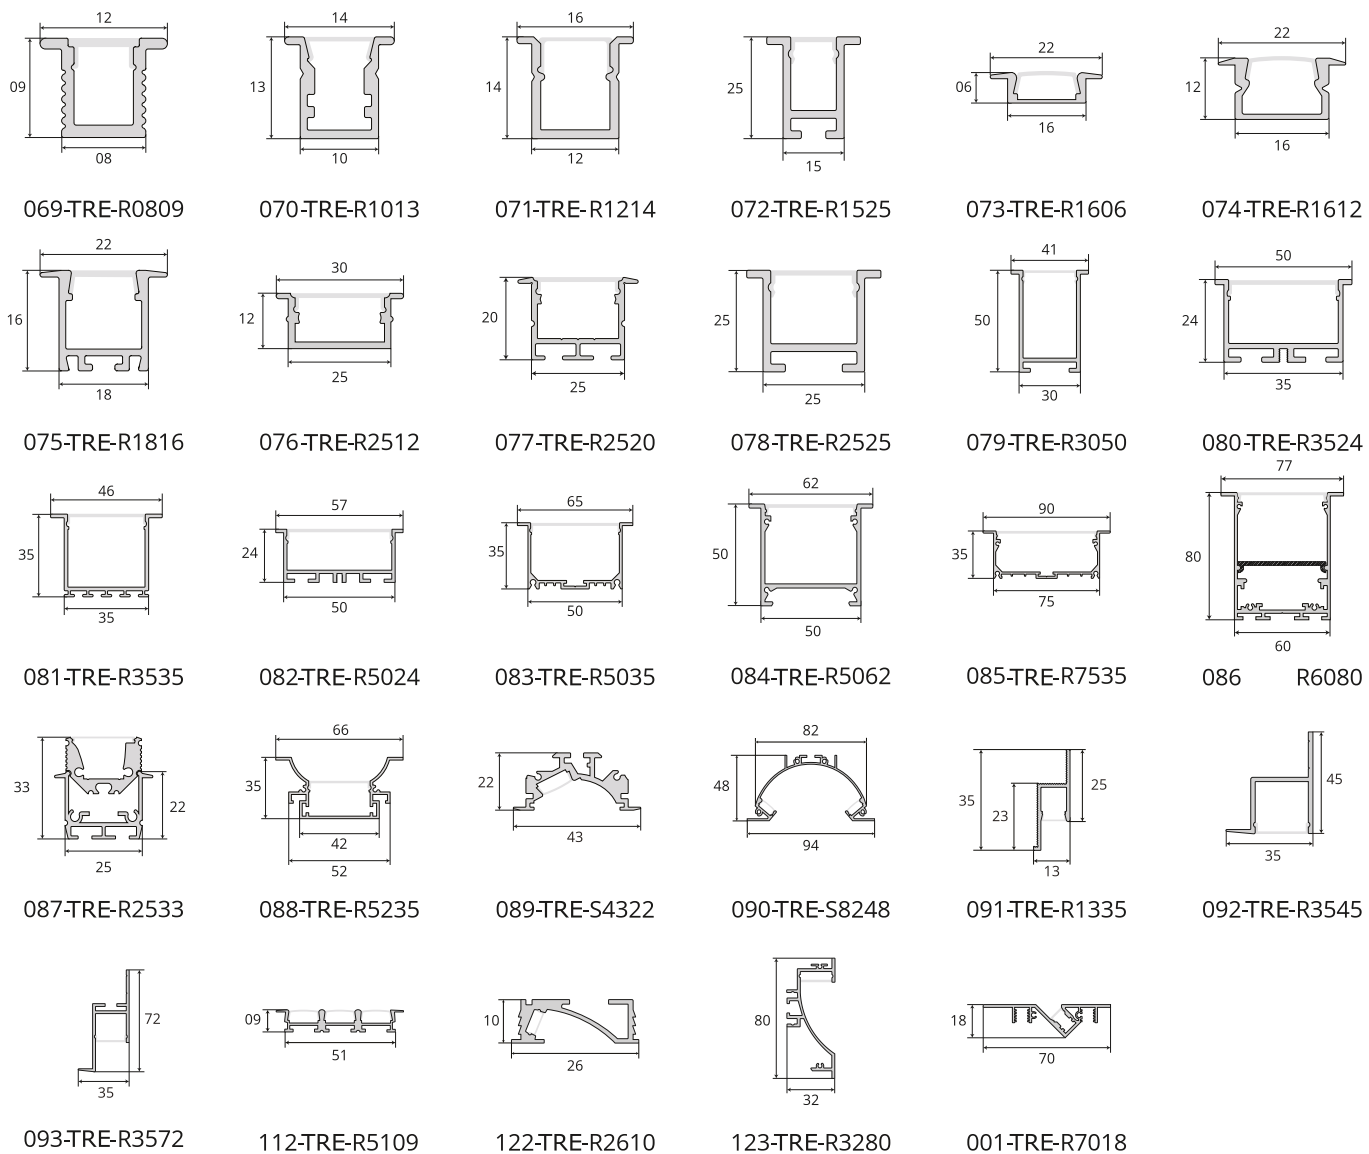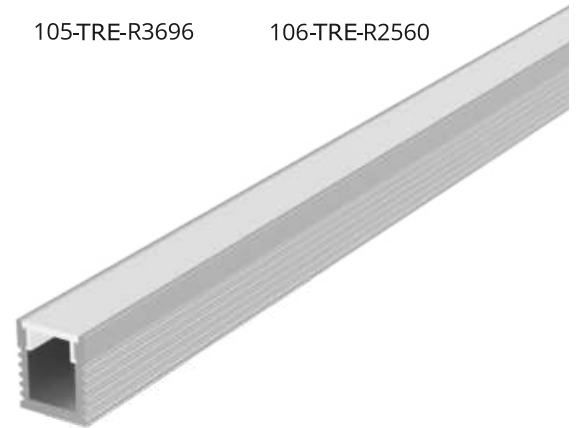


RECESSED MOUNTED - PoP/GYPSUM SERIES




094-TRE-R6076




095-TRE-R8248




096-TRE-R1214




097-TRE-R1214




098-TRE-R1214




099-TRE-R2525




100-TRE-R3535




101-TRE-R5035




102-TRE-R8657




103-TRE-R9436




104-TRE-R2588




105-TRE-R3696




106-TRE-R2560




107-TRE-R3568




108-TRE-R2541




109-TRE-R3550




110-TRE-R1227



111-TRE-R2435




120-TRE-R2112




121-TRE-R2126


LENS PROFILE SERIES




125-TRE-S1618




126-TRE-S1815




126-TRE-S1815




127-TRE-S2125



128-TRE-S2825




129-TRE-S2125




130-TRE-S3425




PENDANT PROFILE




024-TRE-S6080




131-TRE-P5045




132-TRE-P5070




133-TRE-P7090




134-TRE-P7590




135-TRE-P1002




136-TRE-P7683




137-TRE-P3065




138-TRE-P5065




139-TRE-P6080




140-TRE-P3030




140-TRE-P3030



141-TRE-P3030




142-TRE-P6030




143-TRE-P0101




LED PROFILE SCORE




144-TRE-R1418



145-TRE-R5218




146-TRE-S4747



147-TRE-S4545




148-TRE-S1145




149-TRE-S1170

LED PROFILE HUB




150-TRE-S2526




151-TRE-R2526




LED PROFILE FLEXIBLE




152-TRE-F1413




153-TRE-F1413




154-TRE-F0808




155-TRE-F1010




156-TRE-F1212




157-TRE-F1313




158-TRE-F1510




159-TRE-F1616




160-TRE-F1616




161-TRE-F2014




162-TRE-F2020




163-TRE-F3020




164-TRE-F1212




165-TRE-F1616




166-TRE-F2021




167-TRE-F3020




168-TRE-F0817




169-TRE-F0410




170-TRE-F1220




171-TRE-F1212



172-TRE-F1616



173-TRE-F2020



174-TRE-F2211



INFRARED MOTION SENSOR RECESSED



MODEL NO.	TRE-HW06S
LOAD CAPACITY	MAX 40W (LED)
INPUT VOLTAGE	220-240V AC
DETECTION ANGLE	110°
DETECTION DISTANCE	MAX 1-6M (<23° 4-6M, >23° 1-4M)
TIME DELAY	40SEC ± 10SEC
LUX LEVEL	≤ 10
IP RATING	IP20
INSTALLATION HEIGHT	3.5M
CUTOUT SIZE	20MM

INFRARED MOTION SENSOR RECESSED



MODEL NO.	TRE-HW08KT
LOAD CAPACITY	MAX 40W (LED)
INPUT VOLTAGE	220-240V AC
DETECTION ANGLE	110°
DETECTION DISTANCE	MAX 1-6M (<23° 4-6M, >23° 1-4M)
TIME DELAY	5MIN, 45SEC, 15SEC
LUX LEVEL	≤ 2LUX, 25LUX, 2000LUX
IP RATING	IP20
INSTALLATION HEIGHT	3.5M
CUTOUT SIZE	26MM

INFRARED MOTION SENSOR SURFACE



MODEL NO.	TRE-ST02C-360
LOAD CAPACITY	MAX 300W(LED) 1200W(INCANDESCENT LAMP)
INPUT VOLTAGE	220-240V AC
DETECTION ANGLE	360°
DETECTION DISTANCE	MAX 2-12M(<24°) ADJ
TIME DELAY	10SEC TO 7MIN(ADJ)
LUX LEVEL	≤ 10 TO 2000 LUX ADJ
IP RATING	IP44
INSTALLATION HEIGHT	1.8-2.5M

INFRARED MOTION SENSOR SURFACE



MODEL NO.	TRE-ST06-180
LOAD CAPACITY	MAX 300W(LED) 1200W(INCANDESCENT LAMP)
INPUT VOLTAGE	220-240V AC
DETECTION ANGLE	180°
DETECTION DISTANCE	MAX 12M(<24°)
TIME DELAY	10SEC TO 7MIN(ADJ)
LUX LEVEL	≤ 10 TO 2000 LUX ADJ
IP RATING	IP44
INSTALLATION HEIGHT	1.8-2.5M

INFRARED MOTION SENSOR SURFACE



MODEL NO.	TRE-ST19A-SM
LOAD CAPACITY	MAX 300W(LED) 1200W(INCANDESCENT LAMP)
INPUT VOLTAGE	220-240V AC
DETECTION ANGLE	360°
DETECTION DISTANCE	MAX 6M(<24°)
TIME DELAY	10SEC TO 7MIN(ADJ)
LUX LEVEL	≤ 10 TO 2000 LUX ADJ
IP RATING	IP20
INSTALLATION HEIGHT	2.2-4M

INFRARED MOTION SENSOR RECESSED



MODEL NO.	TRE-ST17A1-CON
LOAD CAPACITY	MAX 300W(LED) 1200W(INCANDESCENT LAMP)
INPUT VOLTAGE	220-240V AC
DETECTION ANGLE	360°
DETECTION DISTANCE	MAX 6M(<24°)
TIME DELAY	10SEC TO 7MIN(ADJ)
LUX LEVEL	≤ 10 TO 2000 LUX ADJ
IP RATING	IP44
INSTALLATION HEIGHT	2.2-4M
CUTOUT SIZE	65MM

INFRARED MOTION SENSOR MODULAR



MODEL NO.	TRE-ST23B-MOD
LOAD CAPACITY	MAX 400W(LED) 800W(INCANDESCENT LAMP)
INPUT VOLTAGE	220-240V AC
DETECTION ANGLE	160°
DETECTION DISTANCE	MAX 9M(<24°)
TIME DELAY	10SEC TO 7MIN(ADJ)
LUX LEVEL	≤ 10 TO 2000 LUX ADJ
IP RATING	IP44
INSTALLATION HEIGHT	1-1.8M
CUTOUT SIZE	47mm x 52mm

INFRARED MOTION SENSOR STREET / FLOOD



MODEL NO.	TRE-ST01-FL
LOAD CAPACITY	MAX 100W(LED) 400W(INCANDESCENT LAMP)
INPUT VOLTAGE	220-240V AC
DETECTION ANGLE	180°
DETECTION DISTANCE	MAX 2-12M(<24°) ADJ
TIME DELAY	10SEC TO 6MIN(ADJ)
LUX LEVEL	<-10 TO 2000 LUX ADJ
IP RATING	IP65

DUSK TO DAWN LIGHT SENSOR




MODEL NO.	TRE-ST302-10A
RATED CURRENT	10A
INPUT VOLTAGE	220-240V AC
LUX LEVEL	<10LUX(ON, >40LUX (OFF)
IP RATING	IP44

DUSK TO DAWN LIGHT SENSOR



MODEL NO.	TRE-ST301-6A
RATED CURRENT	6A
INPUT VOLTAGE	220-240V AC
LUX LEVEL	<5-50LUX ADJUSTABLE
IP RATING	IP44

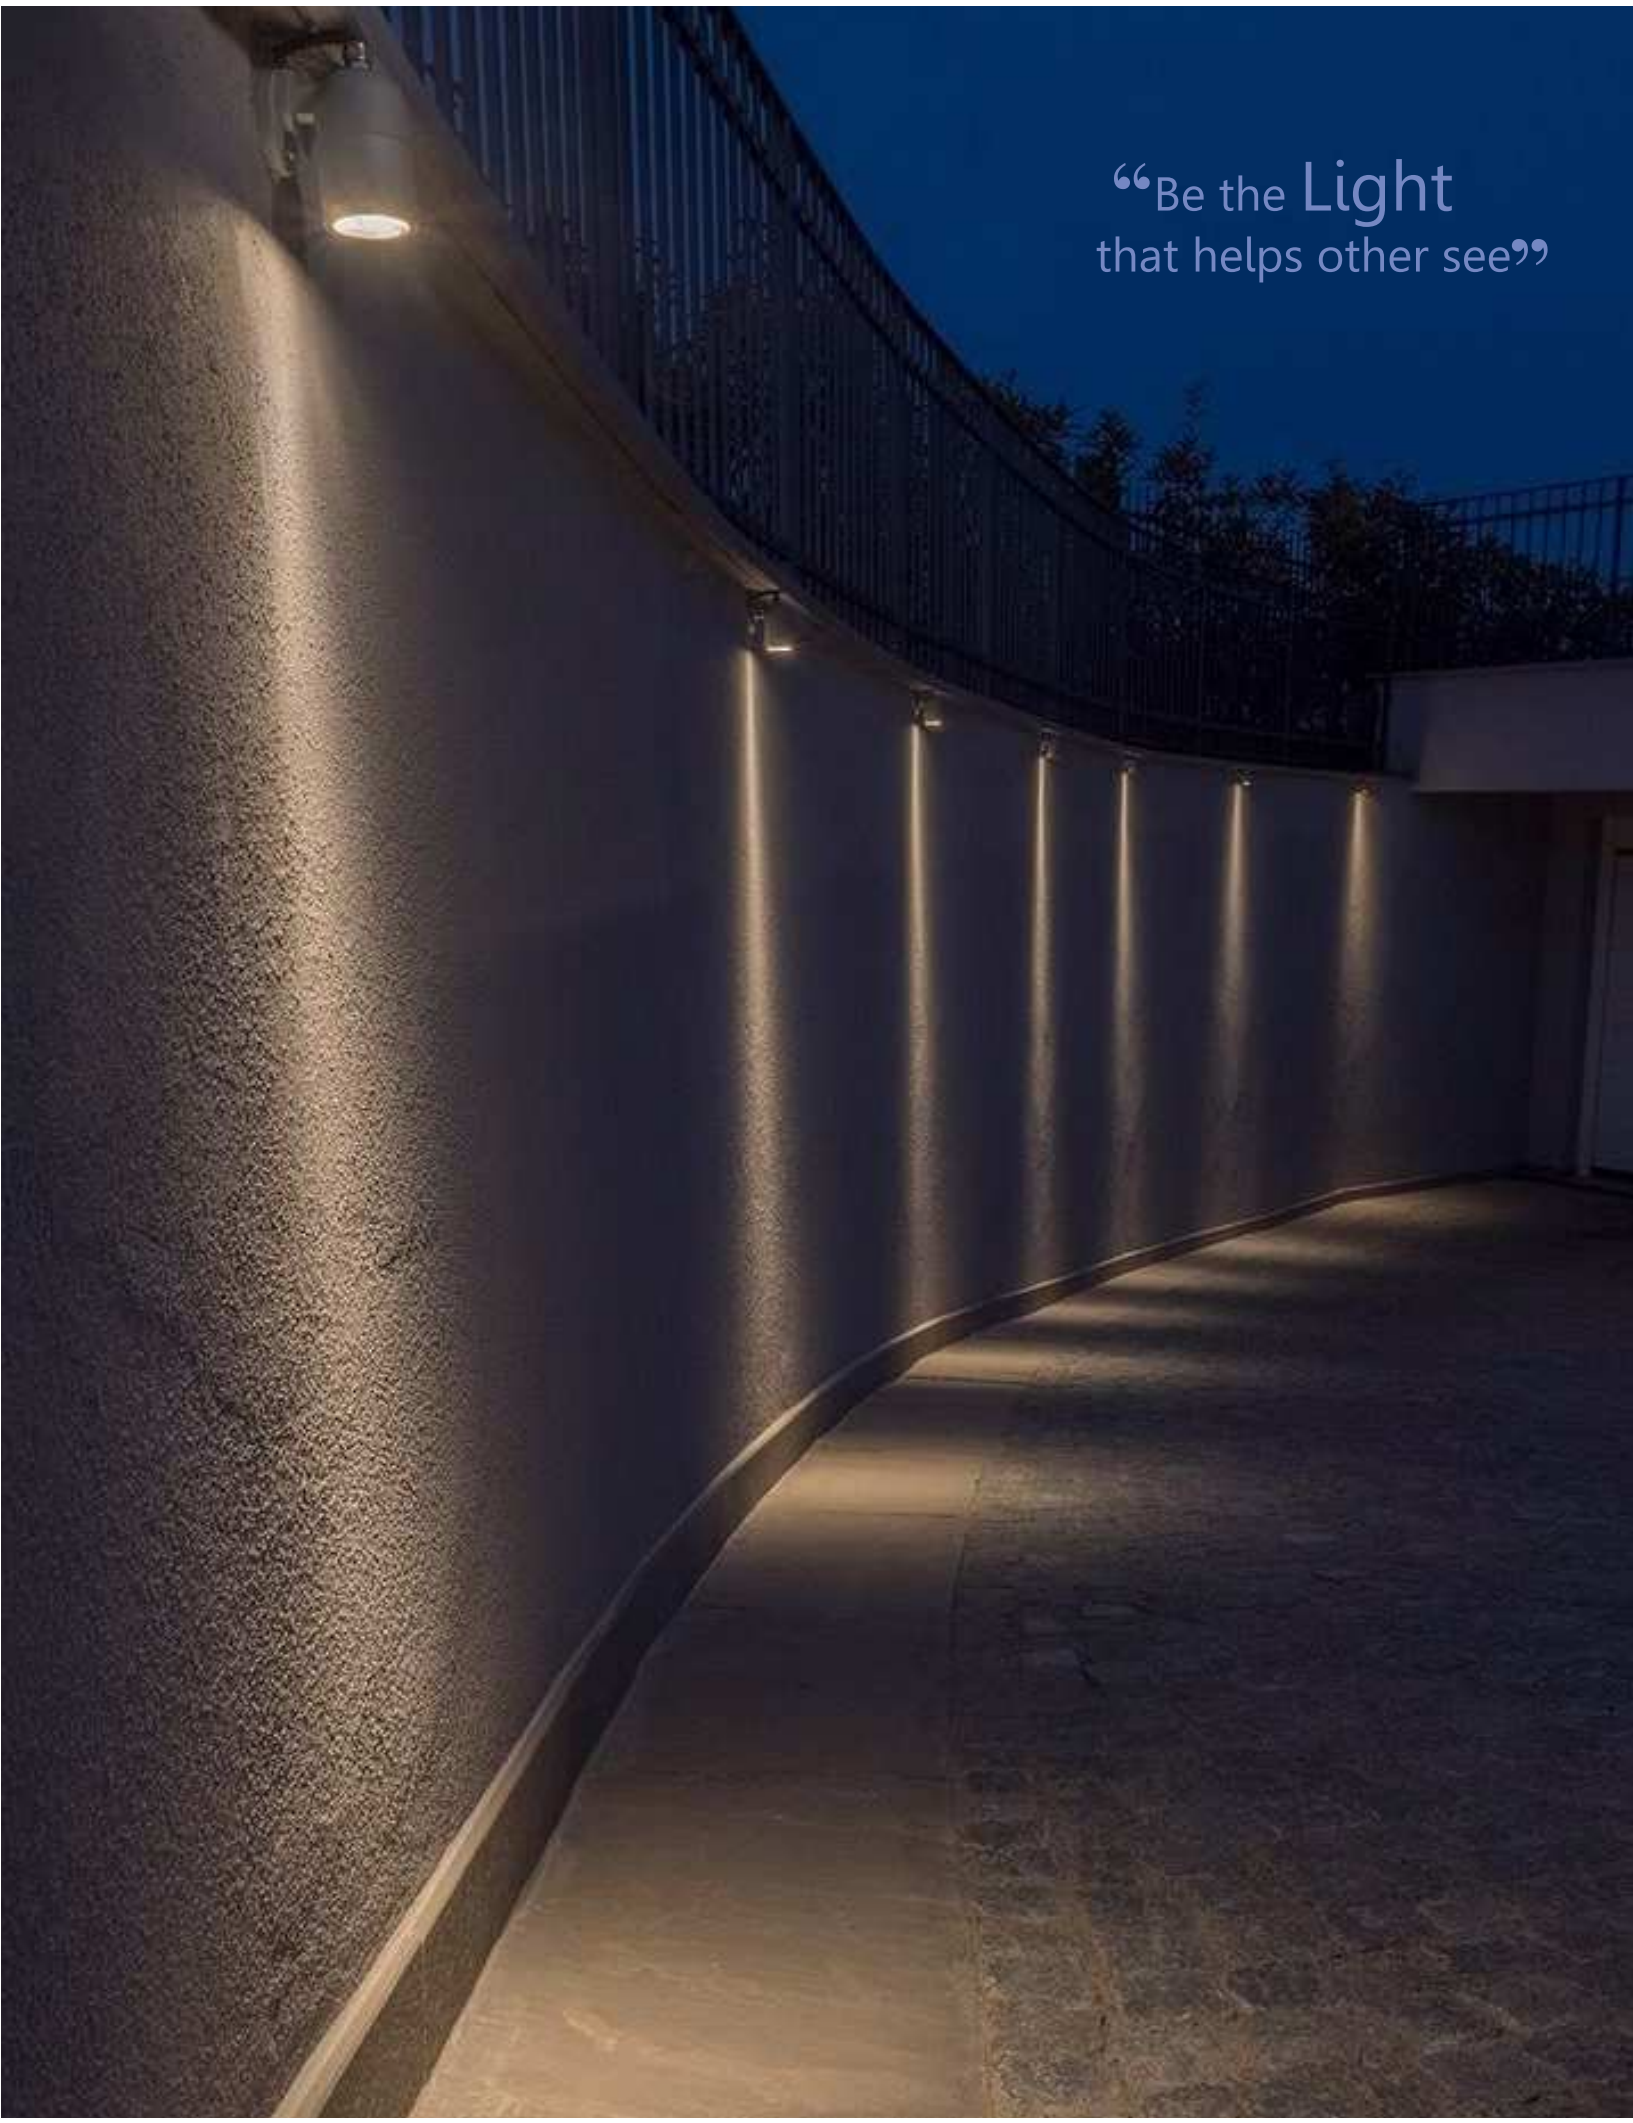

“Be the **Light**
that helps other see”



Treco Technologies Pvt. Ltd.

Add: A-7, 2nd Floor, Kailash Plaza,
Acharya Niketan, Mayur Vihar -1,
New Delhi - 110091

(M): +91-98108 94981/ +91- 99992 21655

(O): +91-11-45662460

Email ID: info@treco.in, Web: www.treco.in

