


TRECO[®]
L I G H T I N G

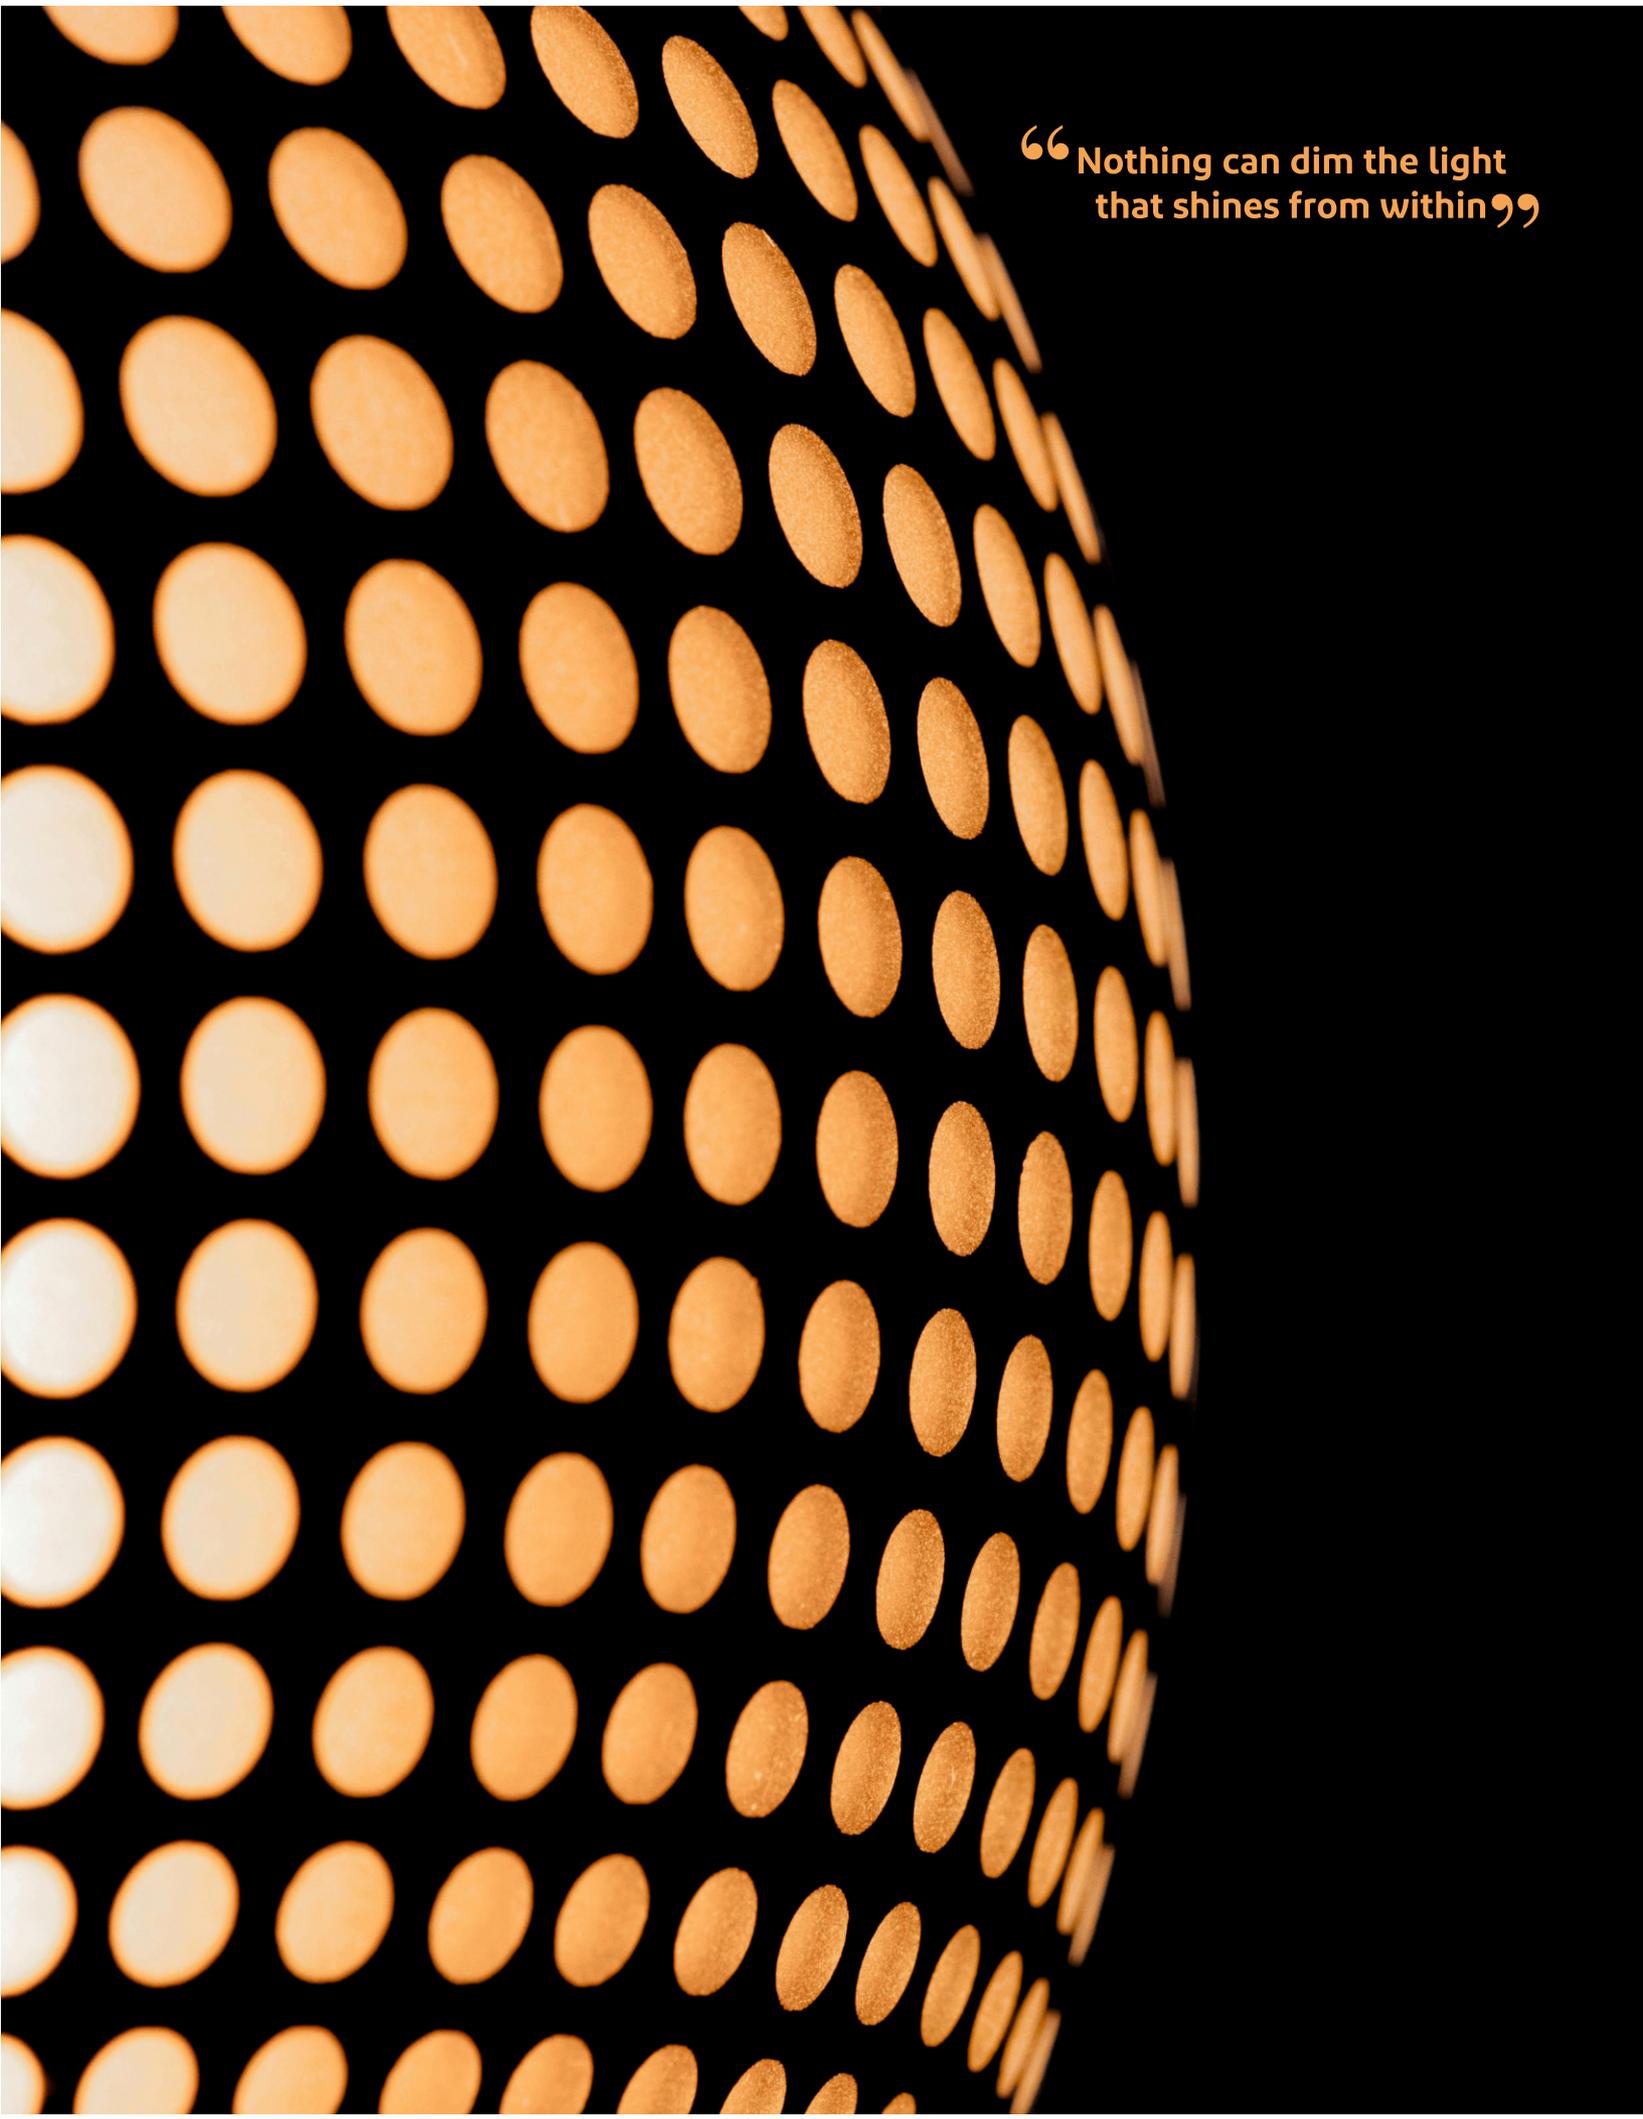

ARCHITECTURAL • COMMERCIAL • RESIDENTIAL

A curved surface, possibly a dome or a large sphere, is shown from a low angle. The surface is covered in a regular grid of glowing orange oval-shaped holes. The light from these holes creates a warm, golden glow against the dark background. The perspective is from the side, showing the curvature of the surface.

“Nothing can dim the light
that shines from within”

Recessed Surface Hanging



Ultra - Thin
Surface
Looks
Like
Recessed





Smart MAGNETIC Lights

Dimmable • Tunable • 3-in-1

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Material | CCT | Beam Angle |
|------------------------------|---------------------------|-------|-------------|------------------|----------|-----------|------------|
| 6W Magnetic Linear Spot | TR-MAG-SPOT6W-2.4G | 6W | 48V | L113 x W22 x H43 | Aluminum | 2700-6500 | 24° |
| 12W Magnetic Linear Spot | TR-MAG-SPOT12W-2.4G | 12W | 48V | L220 x W22 x H43 | Aluminum | 2700-6500 | 24° |
| 18W Magnetic Linear Spot | TR-MAG-SPOT18W-2.4G | 18W | 48V | L328 x W22 x H43 | Aluminum | 2700-6500 | 24° |
| 24W Magnetic Linear Spot | TR-MAG-SPOT24W-2.4G | 24W | 48V | L435 x W22 x H43 | Aluminum | 2700-6500 | 24° |
| 6W Magnetic Spot Adjustable | TR-MAG-SPOT-ADJ6W-2.4G | 6W | 48V | L120 x W22 x H85 | Aluminum | 2700-6500 | 24° |
| 12W Magnetic Spot Adjustable | TR-MAG-SPOT-ADJ12W-2.4G | 12W | 48V | L228 x W22 x H85 | Aluminum | 2700-6500 | 24° |
| 18W Magnetic Spot Adjustable | TR-MAG-SPOT-ADJ18W-2.4G | 18W | 48V | L334 x W22 x H85 | Aluminum | 2700-6500 | 24° |
| 12W Magnetic Linear Diffused | TR-MAG-DIFFUSED12W-2.4G | 12W | 48V | L300 x W22 x H43 | Aluminum | 2700-6500 | N/A |
| 24W Magnetic Linear Diffused | TR-MAG-DIFFUSED24W-2.4G | 24W | 48V | L600 x W22 x H43 | Aluminum | 2700-6500 | N/A |
| 12W Magnetic Track Light | TR-MAG-TRACK12W-2.4G | 12W | 48V | D50 x H180 | Aluminum | 2700-6500 | 24° |
| 24W Magnetic Track Light | TR-MAG-TRACK24W-2.4G | 24W | 48V | D60 x H200 | Aluminum | 2700-6500 | 24° |
| 12W Magnetic Hanging Short | TR-MAG-HANG-SMALL12W-2.4G | 12W | 48V | D55 x H165 | Aluminum | 2700-6500 | 24° |
| 12W Magnetic Hanging Long | TR-MAG-HANG-LONG12W-2.4G | 12W | 48V | D55 x H300 | Aluminum | 2700-6500 | 24° |


• Tunable & Dimmable by Remote




Spot Light



Track Light

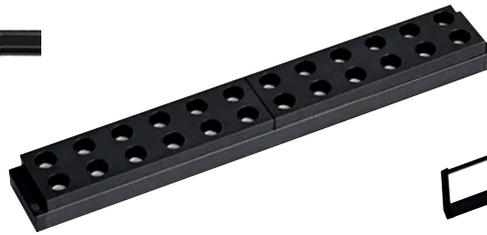

Linear Grill

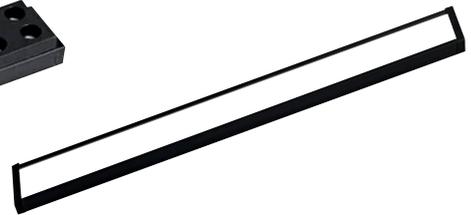

Linear Diffused



Cylinder Rotatable




Cylinder



Driver




Ultra-thin Track Channel

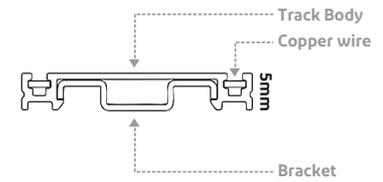


Single Spot




ARC




Jointer 180°



Jointer 90°



T Jointer



Cross Jointer



Vertical Jointer

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Material | CCT | Beam Angle |
|--------------------------------|-------------|-------|-------------|-------------------|----------|-----------|------------|
| 12W Magnetic Linear Diffused | TR305-DF12 | 12W | 48V | L300 x W32 x H11 | Aluminum | 2700-6500 | 105° |
| 10W Magnetic Linear Grill | TR305-LG10 | 10W | 48V | L240 x W32 x H11 | Aluminum | 2700-6500 | 30° |
| 10W Magnetic Spot Adjustable | TR305-LSA10 | 10W | 48V | L140 x W30 x H105 | Aluminum | 2700-6500 | 30° |
| 7W Magnetic Track Light | TR305-TL07 | 7W | 48V | D30 x H145 | Aluminum | 2700-6500 | 24° |
| 7W Magnetic Cylinder | TR305-CD07 | 7W | 48V | D54 x H75 | Aluminum | 2700-6500 | 24° |
| 7W Magnetic Cylinder Rotatable | TR305-CD07R | 7W | 48V | D54 x H98 | Aluminum | 2700-6500 | 24° |
| 6W Magnetic Single Spot | TR305-SP06 | 6W | 48V | L48 x W35 x H60 | Aluminum | 2700-6500 | 30° |
| 6W Magnetic ARC Light | TR305-ARC06 | 6W | 48V | L48 x W35 x H60 | Aluminum | 2700-6500 | 160° |

| Item | Model No. |
|---------------------------|--------------|
| 1M Magnetic Track Channel | TR305-1M |
| 2M Magnetic Track Channel | TR305-2M |
| 3M Magnetic Track Channel | TR305-3M |
| 48V 100W Driver | TR305-DR100W |
| 48V 200W Driver | TR305-DR200W |

ACCESSORIES

| Item | Model No. |
|------------------|------------------------|
| 180° Jointer | TR305-JOINTER-180 |
| 90° Jointer | TR305-JOINTER-90 |
| T Jointer | TR305-JOINTER-T |
| Cross Jointer | TR305-JOINTER-CROSS |
| Vertical Jointer | TR305-JOINTER-VERTICAL |

• Available in Cool White, Neutral White & Warm White



| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Material | CCT | Beam Angle |
|------------------------------|-----------------------|-------|-------------|------------------|----------|-----------|------------|
| 6W Magnetic Linear Spot | TR-MAG-SPOT6W | 6W | 48V | L113 x W22 x H43 | Aluminum | 2700-6500 | 24° |
| 12W Magnetic Linear Spot | TR-MAG-SPOT12W | 12W | 48V | L220 x W22 x H43 | Aluminum | 2700-6500 | 24° |
| 18W Magnetic Linear Spot | TR-MAG-SPOT18W | 18W | 48V | L328 x W22 x H43 | Aluminum | 2700-6500 | 24° |
| 24W Magnetic Linear Spot | TR-MAG-SPOT24W | 24W | 48V | L435 x W22 x H43 | Aluminum | 2700-6500 | 24° |
| 6W Magnetic Spot Adjustable | TR-MAG-SPOT-ADJ6W | 6W | 48V | L120 x W22 x H85 | Aluminum | 2700-6500 | 24° |
| 12W Magnetic Spot Adjustable | TR-MAG-SPOT-ADJ12W | 12W | 48V | L228 x W22 x H85 | Aluminum | 2700-6500 | 24° |
| 18W Magnetic Spot Adjustable | TR-MAG-SPOT-ADJ18W | 18W | 48V | L334 x W22 x H85 | Aluminum | 2700-6500 | 24° |
| 12W Magnetic Linear Diffused | TR-MAG-DIFFUSED12W | 12W | 48V | L300 x W22 x H43 | Aluminum | 2700-6500 | N/A |
| 24W Magnetic Linear Diffused | TR-MAG-DIFFUSED24W | 24W | 48V | L600 x W22 x H43 | Aluminum | 2700-6500 | N/A |
| 24W Magnetic Corner Diffused | TR-MAG-DIFF-CORNER24W | 24W | 48V | L300 x W22 x H43 | Aluminum | 2700-6500 | N/A |
| 12W Magnetic Track Light | TR-MAG-TRACK12W | 12W | 48V | D50 x H180 | Aluminum | 2700-6500 | 24° |
| 24W Magnetic Track Light | TR-MAG-TRACK24W | 24W | 48V | D60 x H200 | Aluminum | 2700-6500 | 24° |
| 12W Magnetic Hanging Short | TR-MAG-HANG-SMALL12W | 12W | 48V | D55 x H165 | Aluminum | 2700-6500 | 24° |
| 12W Magnetic Hanging Long | TR-MAG-HANG-LONG12W | 12W | 48V | D55 x H300 | Aluminum | 2700-6500 | 24° |

| Item | Model No. |
|--------------------------------|-------------------|
| 1M Magnetic Track Channel | TR-MAG-CH-1M |
| 2M Magnetic Track Channel | TR-MAG-CH-2M |
| 3M Magnetic Track Channel | TR-MAG-CH-3M |
| Track to Track Module 90°/180° | TR-MAG-MD90/180 |
| Driver to Track Input Module | TR-MAG-MD-INPUT |
| Hanging Wire For Channel | TR-MAG-HANGINGSET |

ACCESSORIES

| Item | Model No. |
|---------------------------|--------------------|
| 3M Front Cover | TR-MAG-CH-COVER |
| Remote For Tunable 2.4G | TR-MAG-REMOTE 2.4G |
| Jointer Horizontal 90° | TR-MAG-JOINTER-HR |
| Jointer Vertical 90° | TR-MAG-JOINTER-VR |
| 48V 100W Concealed Driver | TR-MAG-48VDR100 |
| 48V 200W Concealed Driver | TR-MAG-48VDR200 |

• Available in Cool White, Neutral White & Warm White



TRACK LIGHTS



| Model No. | Power | Luminous Flux | CRI | Colour Temp. | Emiting Angle | Diamensions | Hole Size |
|-----------|-------|----------------|-----|-----------------|---------------|-------------|-----------|
| LX 3053 | 15W | 1390/1440/1500 | >80 | 3000/4000/6000K | 24° 36° 60° | Ø55 *H135mm | // |

COB TRACK LIGHTS



**Body Colour
Black & White**

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | COB Size | Material | CCT | Beam Angle |
|----------------------------|-------------|-------|-------------|-----------------|----------|----------|-----------|------------|
| 20W Track Light PLAIN | TR-TRACK20 | 20W | 90-265V | 85 x 135 | 17mm | Aluminum | 2700-6500 | 24° |
| 30W Track Light PLAIN | TR-TRACK30 | 30W | 90-265V | 85 x 160 | 17mm | Aluminum | 2700-6500 | 24° |
| 40W Track Light PLAIN | TR-TRACK40 | 40W | 90-265V | 110 x 160 | 17mm | Aluminum | 2700-6500 | 24° |
| 10W Track Light RHOMBUS | TRRHOMBUS10 | 10W | 90-265V | 70 x 116 | 11mm | Aluminum | 2700-6500 | 24° |
| 20W Track Light RHOMBUS | TRRHOMBUS20 | 20W | 90-265V | 90 x 116 | 17mm | Aluminum | 2700-6500 | 24° |
| 30W Track Light RHOMBUS | TRRHOMBUS30 | 30W | 90-265V | 90 x 130 | 17mm | Aluminum | 2700-6500 | 24° |
| 10W Track Light 360 Degree | TR-TR360D10 | 10W | 90-265V | 100 x 80 | 11mm | Aluminum | 2700-6500 | 24° |
| 20W Track Light 360 Degree | TR-TR360D20 | 20W | 90-265V | 110 x 95 | 17mm | Aluminum | 2700-6500 | 24° |
| 30W Track Light 360 Degree | TR-TR360D30 | 30W | 90-265V | 115 x 110 | 17mm | Aluminum | 2700-6500 | 24° |

• Available in Cool White, Neutral White & Warm White

SKD, Housing & Spares also available

FOCUS

**PLEASANT LIGHTING
WITH
GREAT ILLUMINATION**



**Soft
Lights**

**Longer
Life**

**Available
Different
Colors**

**Premium
Quality**

LED Cob Spot Light Series



| Model No. | Power | Luminous Flux | CRI | Colour Temp. | Emitting Angle | Dimensions | Hole Size |
|-----------|-------|----------------|-----|-----------------|----------------|----------------|-----------|
| LX 1061 | 2x12W | 2720/2800/2880 | >80 | 3000/4000/6000K | 10° 24° 40° | Ø195x105 H85mm | Ø175x85mm |



| Model No. | Power | Luminous Flux | CRI | Colour Temp. | Emitting Angle | Dimensions | Hole Size |
|-----------|-------|----------------|-----|-----------------|----------------|-----------------|-----------|
| LX 1062 | 2x12W | 2720/2800/2880 | >80 | 3000/4000/6000K | 10° 24° 40° | Ø104x196 *H92mm | Ø175x85mm |



| Model No. | Power | Luminous Flux | CRI | Colour Temp. | Emitting Angle | Dimensions | Hole Size |
|-----------|-------|----------------|-----|-----------------|----------------|------------|-----------|
| LX 1066 | 18W | 1690/1740/1800 | >80 | 3000/4000/6000K | 10° 24° 40° | Ø70xH95mm | Ø65mm |



| Model No. | Power | Luminous Flux | CRI | Colour Temp. | Emitting Angle | Dimensions | Hole Size |
|-----------|-------|----------------|-----|-----------------|----------------|--------------|-----------|
| LX 1055 | 12W | 1090/1160/1200 | >80 | 3000/4000/6000K | 10° 24° 40° | Ø100 *H108mm | Ø182mm |

• Available in Cool White, Neutral White, Warm White.

SKD, Housing & Spares also available



Linear SPOT DOWNLIGHT



| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | LED | CRI |
|--------------------------|--------------------|-------|-------------|-----------------|----------------|---------|-----|
| 10W Linear Spot 40x140mm | TR-LINEARSPOT40140 | 10W | 90-265V | 155 x 53 | 40 x 140 | 2W 3030 | >75 |
| 20W Linear Spot 70x140mm | TR-LINEARSPOT70140 | 20W | 90-265V | 155 x 85 | 70 x 140 | 2W 3030 | >75 |
| 20W Linear Spot 40x270mm | TR-LINEARSPOT40270 | 20W | 90-265V | 287 x 53 | 40 x 270 | 2W 3030 | >75 |




COB DEEP



| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|-------------------|--------------|-------|-------------|-----------------|----------------|----------|----------|-----------|------------|
| 10W COB Downlight | TR-COBDEEP10 | 10W | 90-265V | 100 x 100 | 85 | 11mm | Aluminum | 2700-6500 | 24 |
| 20W COB Downlight | TR-COBDEEP20 | 20W | 90-265V | 120 x 130 | 100 | 11mm | Aluminum | 2700-6500 | 24 |
| 30W COB Downlight | TR-COBDEEP30 | 30W | 90-265V | 150 x 120 | 130 | 17mm | Aluminum | 2700-6500 | 30 |

• Available in Cool White, Neutral White, Warm White.


SKD, Housing & Spares also available

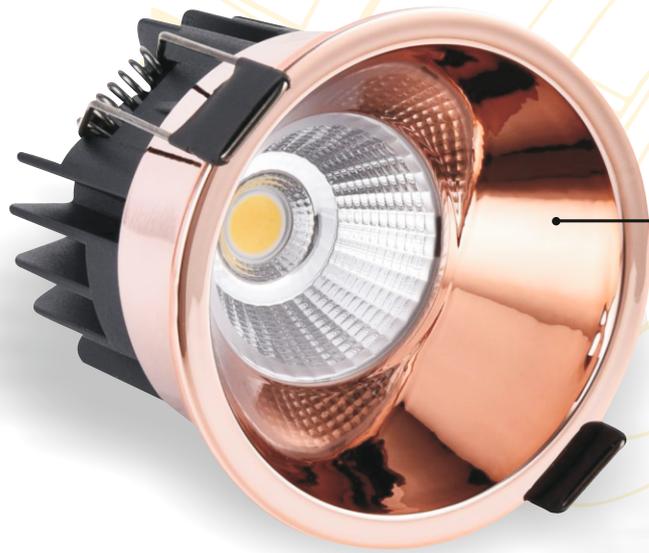

AVAILABLE COLORS

- Rose Gold + White
- Champagne Gold + White
- All White
- Gun Metal + White
- Matte Black + White
- Chrome + White
- Rose Gold + Black
- Champagne Gold + Black
- All Black
- Gun Metal + Black
- Chrome + Black

COB LIGHTS

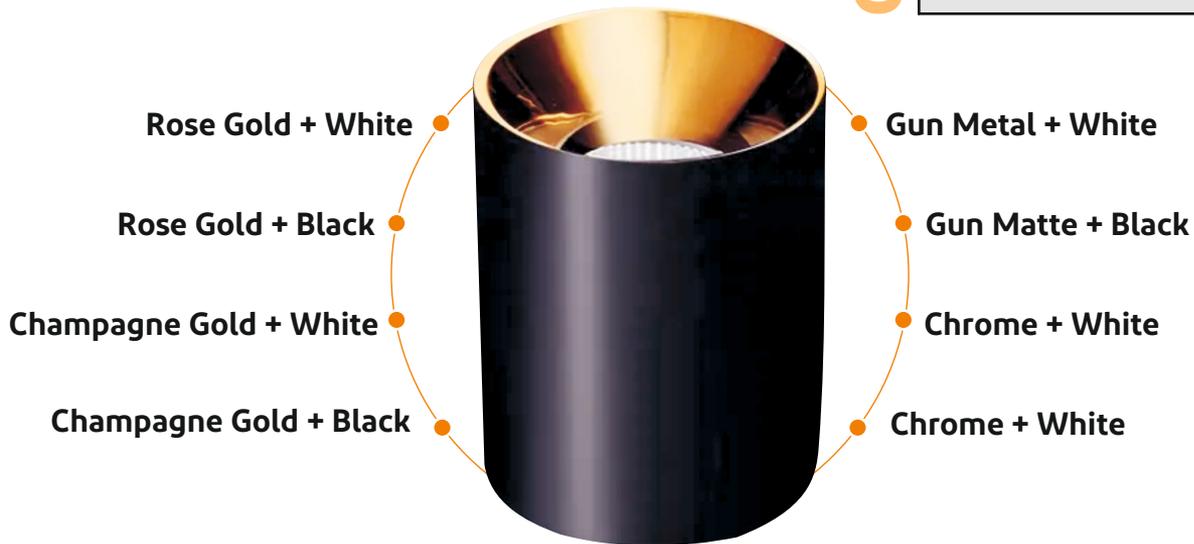

Rose Gold + White

Rose Gold + Black

Champagne Gold + White

Champagne Gold + Black

Gun Metal + White

Gun Matte + Black

Chrome + White

Chrome + White

COB RECESSED COLORED REFLECTOR

Body Colour
Black & White

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|---------------|-------------|-------|-------------|-----------------|----------------|----------|----------|-----------|------------|
| 7W COB Light | TR-COBREF07 | 7W | 90-265V | 65 x 60 | 55 | 11mm | Aluminum | 2700-6500 | 24° |
| 12W COB Light | TR-COBREF12 | 12W | 90-265V | 85 x 76 | 75 | 11mm | Aluminum | 2700-6500 | 24° |

Reflector Options: All Black / All White / Gun Metal / Rose Gold / Matt Black / Champagne Gold / Chrome

COB SURFACE COLORED REFLECTOR


Body Colour
Black & White

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | COB Size | Material | CCT | Beam Angle |
|-----------------|---------------|-------|-------------|-----------------|----------|----------|-----------|------------|
| 7W COB Surface | TR-COBSMREF07 | 7W | 90-265V | 53 x 88 | 11mm | Aluminum | 2700-6500 | 24 |
| 12W COB Surface | TR-COBSMREF12 | 12W | 90-265V | 73 x 105 | 11mm | Aluminum | 2700-6500 | 24 |
| 20W COB Surface | TR-COBSMREF20 | 20W | 90-265V | 93 x 110 | 11mm | Aluminum | 2700-6500 | 24 |

Reflector Options: Gun Metal / Rose Gold / Champagne Gold / Chrome

• Available in Cool White, Neutral White, Warm White.

SKD, Housing & Spares also available

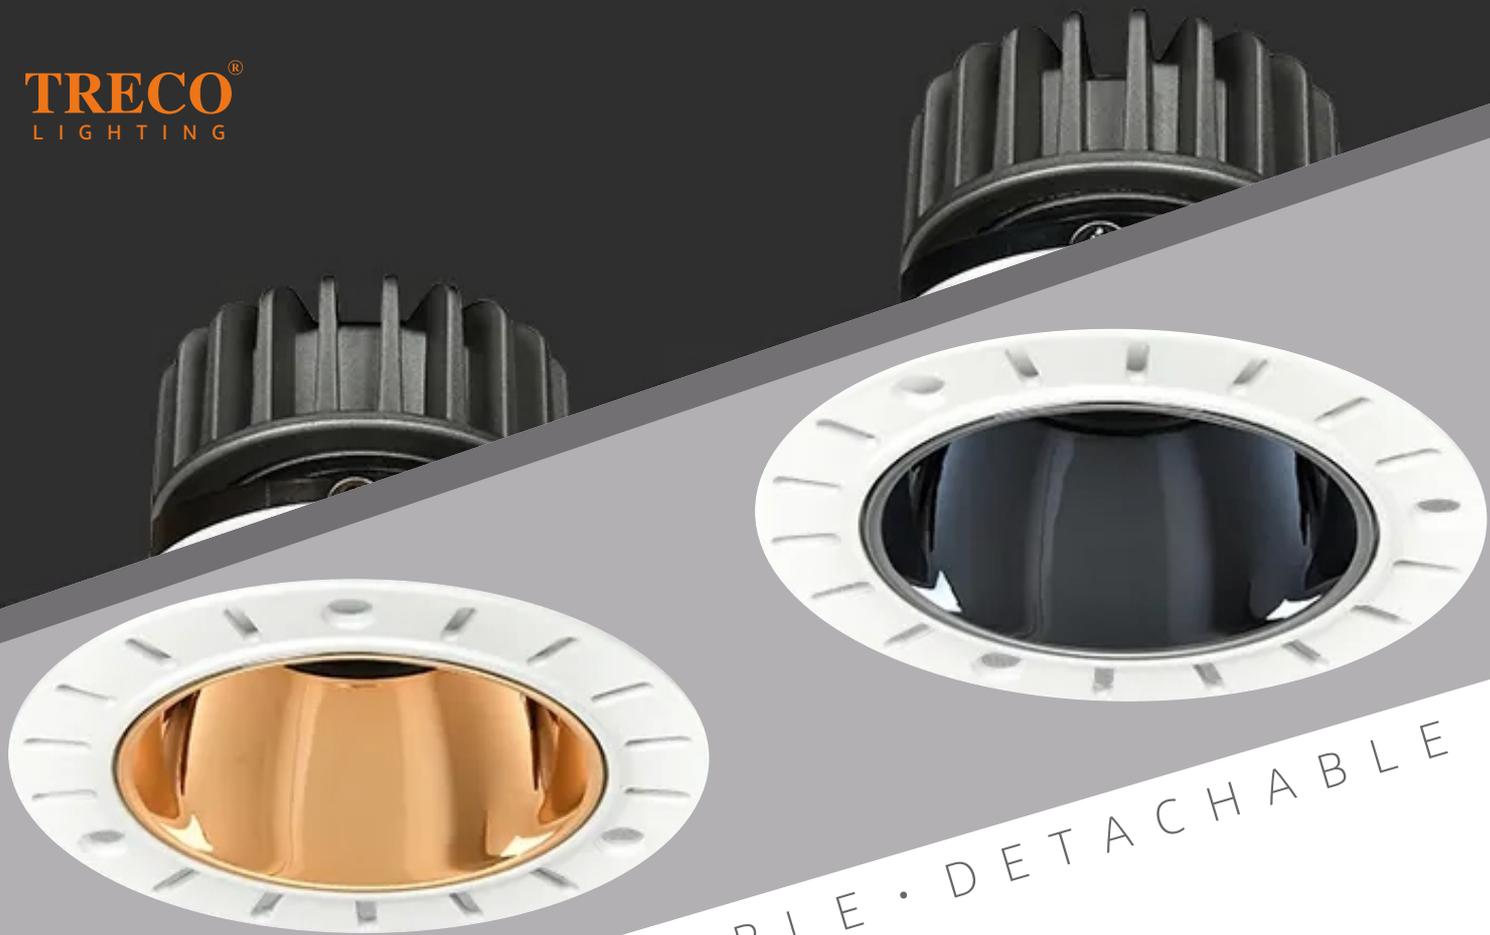

RIMLESS • TILTABLE • DETACHABLE

AVAILABLE COLORS

- All White
- Gun Metal
- Rose Gold
- Matt Black
- Chrome



COB RECESSED-RIMLESS
COLORED REFLECTOR

Body Colour
Black & White

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|---------------|---------------------|-------|-------------|-----------------|----------------|----------|----------|-----------|------------|
| 7W COB Light | TR-RIMLESS-COBREF07 | 7W | 90-265V | 81 x 70 | 55 | 11mm | Aluminum | 2700-6500 | 24° |
| 12W COB Light | TR-RIMLESS-COBREF12 | 12W | 90-265V | 101 x 85 | 75 | 11mm | Aluminum | 2700-6500 | 24° |

Reflector Options: All White / Gun Metal / Rose Gold / Matt Black / Chrome

• Available in Cool White, Neutral White, Warm White.

SKD, Housing & Spares also available

TRECO
LIGHTING



**HANGING
LONG SURFACE**



**Body Colour
Black & White**

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | COB Size | Material | CCT | Beam Angle |
|------------------------------------|-----------------|-------|-------------|-----------------|----------|----------|-----------|------------|
| 12W COB Hanging/Long Surface Light | TR-COBHANGING12 | 12W | 90-265V | 325 x 55 | 11mm | Aluminum | 2700-6500 | 15 |

COB SURFACE



**Body Colour
Black & White**

360° Adjustable

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | COB Size | Material | CCT | Beam Angle |
|---------------------|--------------------|-------|-------------|-----------------|----------|----------|-----------|------------|
| 10W COB Adujustable | TR-COBSURFACE10ADJ | 10W | 90-265V | 100 x 80 | 11mm | Aluminum | 2700-6500 | 24 |
| 20W COB Adujustable | TR-COBSURFACE20ADJ | 20W | 90-265V | 110 x 95 | 11mm | Aluminum | 2700-6500 | 24 |
| 30W COB Adujustable | TR-COBSURFACE30ADJ | 30W | 90-265V | 115 x 110 | 17mm | Aluminum | 2700-6500 | 24 |



Thickened aviation aluminum, multiple electroplating process ring lasting new, shiny texture.



COB light source, effectively play the light effect, improve brightness, brighter and more energy saving at the same time

**Body Colour
Black & White**

COB SURFACE

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | COB Size | Material | CCT | Beam Angle |
|-----------------------|-----------------|-------|-------------|-----------------|----------|----------|-----------|------------|
| 5W COB Surface Light | TR-COBSURFACE05 | 5W | 90-265V | 60 x 76 | 11mm | Aluminum | 2700-6500 | 24° |
| 10W COB Surface Light | TR-COBSURFACE10 | 10W | 90-265V | 75 x 100 | 11mm | Aluminum | 2700-6500 | 24° |
| 20W COB Surface Light | TR-COBSURFACE20 | 20W | 90-265V | 100 x 100 | 11mm | Aluminum | 2700-6500 | 30° |
| 30W COB Surface Light | TR-COBSURFACE30 | 30W | 90-265V | 120 x 120 | 17mm | Aluminum | 2700-6500 | 30° |

• Available in Cool White, Neutral White, Warm White. 5W Available in Red, Green, Blue & Pink SKD, Housing & Spares also available



COB SPOT

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|-------------------|--------------|-------|-------------|-----------------|----------------|----------|----------|-----------|------------|
| 3W COB Downlight | TR-COBSPOT03 | 3W | 90-265V | 68 x 50 | Φ 50 | 11mm | Aluminum | 2700-6500 | 24° |
| 5W COB Downlight | TR-COBSPOT05 | 5W | 90-265V | 85 x 65 | Φ 70 | 11mm | Aluminum | 2700-6500 | 24° |
| 10W COB Downlight | TR-COBSPOT10 | 10W | 90-265V | 110 x 70 | Φ 90 | 11mm | Aluminum | 2700-6500 | 24° |
| 15W COB Downlight | TR-COBSPOT15 | 15W | 90-265V | 135 x 80 | Φ 115 | 11mm | Aluminum | 2700-6500 | 24° |
| 30W COB Downlight | TR-COBSPOT30 | 30W | 90-265V | 160 x 110 | Φ 135 | 17mm | Aluminum | 2700-6500 | 24° |



COB ZOOM

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|----------------|-----------|-------|-------------|-----------------|----------------|----------|----------|-----------|------------|
| 12W ZOOM Light | TR-ZOOM12 | 12W | 90-265V | 104 x 60 | Φ 95 | 11mm | Aluminum | 2700-6500 | 24° |
| 20W ZOOM Light | TR-ZOOM20 | 20W | 90-265V | 135 x 115 | Φ 120 | 11mm | Aluminum | 2700-6500 | 24° |
| 30W ZOOM Light | TR-ZOOM30 | 30W | 90-265V | 165 x 150 | Φ 150 | 17mm | Aluminum | 2700-6500 | 36° |
| 40W ZOOM Light | TR-ZOOM40 | 40W | 90-265V | 165 x 150 | Φ 150 | 17mm | Aluminum | 2700-6500 | 36° |



COB SPOT

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|--------------|-----------|-------|-------------|-----------------|----------------|----------|----------|-----------|-------------|
| 75W Cob Spot | TR-TT 001 | 3W | 90-265V | 35 x 37.5 | Φ 30 | 11mm | Aluminum | 2700-6500 | 24° 24° 24° |

• Available in Cool White, Neutral White, Warm White, Red, Green, Blue & Pink

SKD, Housing & Spares also available

COB SPOT
COB SPOT
COB SPOT



01



02



03

ENERGY SAVING
THE ONLY FRIEND YOU NEED
TO LIGHT UP YOUR LIFE



04

| 01 | Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|----|-------------|------------|-------|-------------|-----------------|----------------|----------|----------|-----------|-------------|
| | 7W COB SPOT | TR-TT 1006 | 7W | 90-265V | 40 x 60 | Φ 33 | 11mm | Aluminum | 2700-6500 | 10° 24° 40° |

| 02 | Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|----|-------------|------------|-------|-------------|-----------------|----------------|----------|----------|-----------|-------------|
| | 7W COB SPOT | TR-TT 1010 | 7W | 90-265V | 91 x 55 | Φ 83 | 11mm | Aluminum | 2700-6500 | 10° 24° 40° |

| 03 | Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|----|---------------|------------|-------|-------------|-----------------|----------------|----------|----------|-----------|-------------|
| | 2x7W COB SPOT | TR-TT 1011 | 2x7W | 90-265V | 168 x 55 | Φ 2x83 | 11mm | Aluminum | 2700-6500 | 10° 24° 40° |

| 04 | Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|----|-------------|------------|-------|-------------|-----------------|----------------|----------|----------|-----------|-------------|
| | 7W COB SPOT | TR-TT 1012 | 7W | 90-265V | 64 x 60 | Φ 60 | 11mm | Aluminum | 2700-6500 | 10° 24° 40° |


• Available in Cool White, Neutral White, Warm White, Red, Green, Blue & Pink

SKD, Housing & Spares also available


COB SPOT




| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|--------------|------------|-------|-------------|-----------------|----------------|----------|----------|-----------|-------------|
| 12W COB SPOT | TR-TT 1055 | 12W | 90-265V | 100 x 108 | Φ 82 | 11mm | Aluminum | 2700-6500 | 10° 24° 40° |

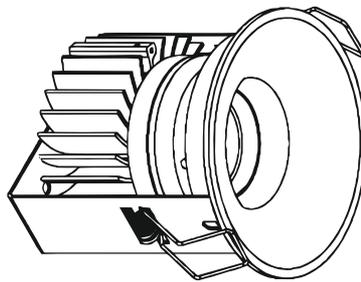

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|-------------|------------|-------|-------------|-----------------|----------------|----------|----------|-----------|-------------|
| 7W COB SPOT | TR-TT 1014 | 7W | 90-265V | 70 x 64 | Φ 58 | 11mm | Aluminum | 2700-6500 | 10° 24° 40° |



| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|-------------|------------|-------|-------------|-----------------|----------------|----------|----------|-----------|-------------|
| 7W COB SPOT | TR-TT 1012 | 7W | 90-265V | 64 x 60 | Φ 60 | 11mm | Aluminum | 2700-6500 | 10° 24° 40° |

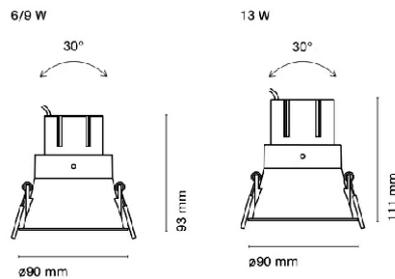

| Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|------------|-------|-------------|-----------------|----------------|----------|----------|-----------|-------------|
| TR-TT 1080 | 12W | 90-265V | 98x124 | Φ 90 | 11mm | Aluminum | 2700-6500 | 10° 24° 40° |


• Available in Cool White, Neutral White, Warm White, Red, Green, Blue & Pink

SKD, Housing & Spares also available




COB SPOT


| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|--------------|------------|-------|-------------|-----------------|----------------|----------|----------|-----------|-------------|
| 12W COB SPOT | TR-TT 1075 | 12W | 90-265V | 90x90x84.6 | Φ75x75 | 11mm | Aluminum | 2700-6500 | 10° 24° 40° |

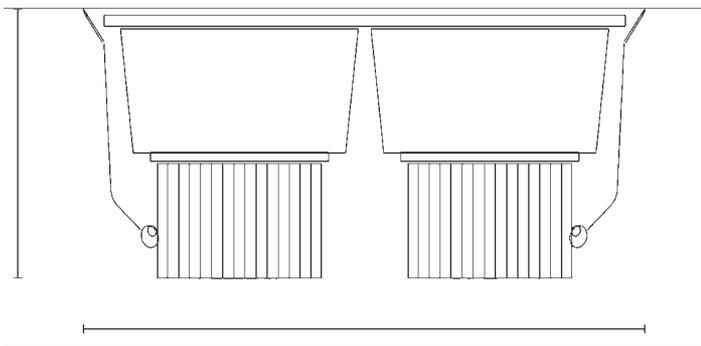

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|----------------|------------|-------|-------------|-----------------|----------------|----------|----------|-----------|-------------|
| 2x12W COB SPOT | TR-TT 1076 | 12W | 90-265V | 175 x 90 | Φ160x75 | 11mm | Aluminum | 2700-6500 | 10° 24° 40° |



| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|--------------|------------|-------|-------------|-----------------|----------------|----------|----------|-----------|-------------|
| 12W COB SPOT | TR-TT 1080 | 12W | 90-265V | 98x124 | Φ 90 | 11mm | Aluminum | 2700-6500 | 10° 24° 40° |

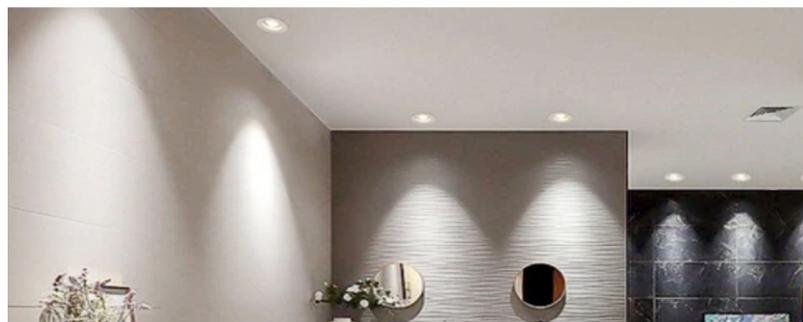

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|--------------|-------------|-------|-------------|-----------------|----------------|----------|----------|-----------|-------------|
| 15W COB SPOT | TR-TT 1084B | 15W | 90-265V | 95x90 | Φ85 | 11mm | Aluminum | 2700-6500 | 10° 24° 40° |


• Available in Cool White, Neutral White, Warm White, Red, Green, Blue & Pink

SKD, Housing & Spares also available



Surface Mounted Light

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|--------------|------------|-------|-------------|-----------------|----------------|----------|----------|-----------|-------------|
| 12W COB SPOT | TR-TT 3002 | 12W | 90-265V | 63 x 160 | - | - | Aluminum | 2700-6500 | 10° 24° 40° |

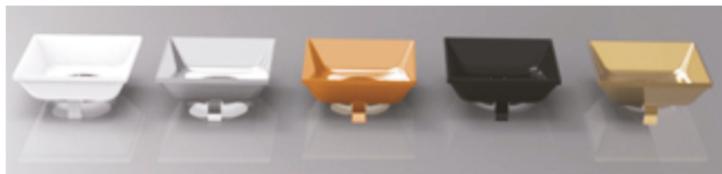

Surface Mounted Light

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | COB Size | Material | CCT | Beam Angle |
|--------------|-------------|-------|-------------|-----------------|----------------|----------|----------|-----------|-------------|
| 15W COB SPOT | TR-TT 1084A | 15W | 90-265V | 95 x 90 | Φ 85 | 11mm | Aluminum | 2700-6500 | 10° 24° 40° |

Surface Mounted Light



| Model No. | Power | Luminous Flux | CRI | Colour Temp. | Emiting Angle | Dimensions | Hole Size |
|-----------|-------|---------------|-----|-----------------|---------------|-------------|-----------|
| LX 3002 | 12W | 960-1080LM | >80 | 3000/4000/6000K | 24° 36° 40° | Ø63 *H160mm | // |

• Available in Cool White, Neutral White, Warm White, Red, Green, Blue & Pink

SKD, Housing & Spares also available

COB FOCUS LIGHTS



Plain Lights



Rhombus



Body Colour
Black & White

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | COB Size | Material | CCT | Beam Angle |
|-------------------------|-------------------|-------|-------------|-----------------|----------|----------|-----------|------------|
| 20W Focus Light PLAIN | TR-FOCUS20 | 20W | 90-265V | 85 x 135 | 17mm | Aluminum | 2700-6500 | 24° |
| 30W Focus Light PLAIN | TR-FOCUS30 | 30W | 90-265V | 85 x 160 | 17mm | Aluminum | 2700-6500 | 24° |
| 40W Focus Light PLAIN | TR-FOCUS40 | 40W | 90-265V | 110 x 160 | 17mm | Aluminum | 2700-6500 | 24° |
| 10W Focus Light RHOMBUS | TR-FOCUSRHOMBUS10 | 10W | 90-265V | 70 x 116 | 11mm | Aluminum | 2700-6500 | 24° |
| 20W Focus Light RHOMBUS | TR-FOCUSRHOMBUS20 | 20W | 90-265V | 90 x 116 | 17mm | Aluminum | 2700-6500 | 24° |
| 30W Focus Light RHOMBUS | TR-FOCUSRHOMBUS30 | 30W | 90-265V | 90 x 130 | 17mm | Aluminum | 2700-6500 | 24° |



• Available in Cool White, Neutral White & Warm White

SKD, Housing & Spares also available





2X2 COMMERCIAL
CEILING PANEL LIGHT

AVAILABLE IN SURFACE MOUNT ALSO

| Type | Model No. | Power | Size (mm) | Height (mm) | LED | No. of LED | Lumens* | Input Voltage |
|----------|--------------|-------|-----------|-------------|------|---------------|---------|---------------|
| Side-Lit | TR-SLP20240W | 40W | 600 x 600 | 10.5 | 2835 | 200 Pcs. 0.2W | ≥ 3600 | 90-265V |
| Back-Lit | TR-BLP20248W | 48W | 600 x 600 | 30 | 2835 | 48 Pcs. 1.5W | ≥ 4400 | 90-265V |



DEEP RECESSED

**Aluminium
Back-LT**

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | No. of LED | Lumens* | CRI |
|-----------------------|--------------|-------|-------------|-----------------|----------------|------------|---------|-----|
| 12W Backlit Downlight | TR-DEEP-BL12 | 12W | 90-265V | Φ 120x50 | Φ 110 | 60 | 1200 | >75 |
| 18W Backlit Downlight | TR-DEEP-BL18 | 18W | 90-265V | Φ 155x55 | Φ 145 | 90 | 1800 | >75 |
| 24W Backlit Downlight | TR-DEEP-BL24 | 24W | 90-265V | Φ 175x55 | Φ 165 | 120 | 2400 | >75 |

• Available in Cool White, Neutral White, Warm White.

SKD, Housing & Spares also available



RECESSED ROUND

**Aluminium
Slim**

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | No. of LED | Lumens* | CRI |
|-----------------|-----------|-------|-------------|-----------------|----------------|------------|---------|-----|
| 3W Panel Light | TR-DL03AL | 3W | 90-265V | 85 x 14 | Φ 70 | 15 | 300 | >75 |
| 6W Panel Light | TR-DL06AL | 6W | 90-265V | 120 x 14 | Φ 100 | 30 | 600 | >75 |
| 9W Panel Light | TR-DL09AL | 9W | 90-265V | 120 x 14 | Φ 100 | 45 | 900 | >75 |
| 12W Panel Light | TR-DL12AL | 12W | 90-265V | 165 x 14 | Φ 150 | 60 | 1200 | >75 |
| 15W Panel Light | TR-DL15AL | 15W | 90-265V | 165 x 14 | Φ 150 | 75 | 1500 | >75 |
| 20W Panel Light | TR-DL20AL | 20W | 90-265V | 225 x 14 | Φ 200 | 100 | 2000 | >75 |
| 24W Panel Light | TR-DL24AL | 24W | 90-265V | 300 x 14 | Φ 275 | 120 | 2400 | >75 |

RECESSED SQUARE

Surface Mount Available from 6W-24W

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | No. of LED | Lumens* | CRI |
|-----------------|-------------|-------|-------------|-----------------|----------------|------------|---------|-----|
| 3W Panel Light | TR-DL03ALSQ | 3W | 90-265V | 85 x 85 x 14 | 70 x 70 | 15 | 300 | >75 |
| 6W Panel Light | TR-DL06ALSQ | 6W | 90-265V | 120 x 120 x 14 | 100 x 100 | 30 | 600 | >75 |
| 9W Panel Light | TR-DL09ALSQ | 9W | 90-265V | 120 x 120 x 14 | 100 x 100 | 45 | 900 | >75 |
| 12W Panel Light | TR-DL12ALSQ | 12W | 90-265V | 165 x 165 x 14 | 150 x 150 | 60 | 1200 | >75 |
| 15W Panel Light | TR-DL15ALSQ | 15W | 90-265V | 165 x 165 x 14 | 150 x 150 | 75 | 1500 | >75 |
| 20W Panel Light | TR-DL20ALSQ | 20W | 90-265V | 225 x 225 x 14 | 200 x 200 | 100 | 2000 | >75 |
| 24W Panel Light | TR-DL24ALSQ | 24W | 90-265V | 300 x 300 x 14 | 275 x 275 | 120 | 2400 | >75 |



RECESSED ROUND

**Aluminium
Trim**

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | No. of LED | Lumens* | CRI |
|----------------------|-----------|-------|-------------|-----------------|----------------|------------|---------|-----|
| 9W TRIM Panel Light | TRDL09 | 9W | 90-265V | Φ 130 | Φ 105 | 45 | 900 | >75 |
| 15W TRIM Panel Light | TRDL15 | 15W | 90-265V | Φ 170 | Φ 155 | 75 | 1500 | >75 |
| 20W TRIM Panel Light | TRDL20 | 20W | 90-265V | Φ 225 | Φ 205 | 100 | 2000 | >75 |

RECESSED SQUARE

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | No. of LED | Lumens* | CRI |
|----------------------|-----------|-------|-------------|-----------------|----------------|------------|---------|-----|
| 9W TRIM Panel Light | TRDL09SQ | 9W | 90-265V | Φ 130 | Φ 105 | 45 | 900 | >75 |
| 15W TRIM Panel Light | TRDL15SQ | 15W | 90-265V | Φ 170 | Φ 155 | 75 | 1500 | >75 |
| 20W TRIM Panel Light | TRDL20SQ | 20W | 90-265V | Φ 225 | Φ 205 | 100 | 2000 | >75 |

• Available in Cool White, Neutral White & Warm White

SKD, Housing & Spares also available



SURFACE ROUND

Motion Sensor Light

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | No. of LED | Lumens* | CRI |
|-----------------|---------------|-------|-------------|-----------------|----------------|------------|---------|-----|
| 6W Panel Light | TR-SDL06AL-MS | 6W | 90-265V | 120 x 14 | Φ 100 | 30 | 600 | >75 |
| 9W Panel Light | TR-SDL09AL-MS | 9W | 90-265V | 120 x 14 | Φ 100 | 45 | 900 | >75 |
| 12W Panel Light | TR-SDL12AL-MS | 12W | 90-265V | 165 x 14 | Φ 150 | 60 | 1200 | >75 |
| 15W Panel Light | TR-SDL15AL-MS | 15W | 90-265V | 165 x 14 | Φ 150 | 75 | 1500 | >75 |
| 20W Panel Light | TR-SDL20AL-MS | 20W | 90-265V | 225 x 14 | Φ 200 | 100 | 2000 | >75 |
| 24W Panel Light | TR-SDL24AL-MS | 24W | 90-265V | 300 x 14 | Φ 275 | 120 | 2400 | >75 |

SURFACE SQUARE

Surface Mount Available from 6W-24W

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Hole Size (mm) | No. of LED | Lumens* | CRI |
|-----------------|-----------------|-------|-------------|-----------------|----------------|------------|---------|-----|
| 6W Panel Light | TR-SDL06ALSQ-MS | 6W | 90-265V | 120 x 120 x 14 | 100 x 100 | 30 | 600 | >75 |
| 9W Panel Light | TR-SDL09ALSQ-MS | 9W | 90-265V | 120 x 120 x 14 | 100 x 100 | 45 | 900 | >75 |
| 12W Panel Light | TR-SDL12ALSQ-MS | 12W | 90-265V | 165 x 165 x 14 | 150 x 150 | 60 | 1200 | >75 |
| 15W Panel Light | TR-SDL15ALSQ-MS | 15W | 90-265V | 165 x 165 x 14 | 150 x 150 | 75 | 1500 | >75 |
| 20W Panel Light | TR-SDL20ALSQ-MS | 20W | 90-265V | 225 x 225 x 14 | 200 x 200 | 100 | 2000 | >75 |
| 24W Panel Light | TR-SDL24ALSQ-MS | 24W | 90-265V | 300 x 300 x 14 | 275 x 275 | 120 | 2400 | >75 |

RECHARGEABLE WARDROBE LIGHT

| | | | | |
|--------------------|-----------|-----------|-----------|-----------|
| MODEL : | WL200 | WL300 | WL400 | WL600 |
| SIZE (MM) : | 170x30x15 | 285x30x15 | 385x30x15 | 585x30x15 |
| BATTERY : | 500mAh | 500mAh | 800mAh | 1200mAh |
| ANGLE : | 120° | 120° | 120° | 120° |
| DELAY : | 20sec | 20sec | 20sec | 20sec |

• MOTION SENSOR • LIGHT SENSOR • INTELLIGENT USB CHARGING



A Glow that
Defines *Luxury*





HANGING LIGHTS

Body
Black, Silver & White
Size Available : 1Ft. to 12Ft.


| Item | Model No. | Power | Input Volt. | LED | No. of LED | Size (mm) |
|-----------------------------------|-------------------|-------|-------------|-----------|------------|------------|
| 45W Hanging Profile 3382 9REF | TR-D3382-45W9R | 45W | 90-265V | 3030 | 45 | 33*82*1200 |
| 36W Hanging Profile 3382 9REF 2PC | TR-D3382-36W3R2PC | 36W | 90-265V | 3030/2835 | 15/120 | 33*82*1200 |
| 36W Hanging Linear Profile 5070 | TR-D5070-36W | 36W | 90-265V | 2835 | 192 | 50*70*1200 |
| 48W Hanging Linear Profile 5070 | TR-D5070-48W | 48W | 90-265V | 2835 | 240 | 50*70*1200 |

• Available in Cool White, Neutral White & Warm White

SKD, Housing & Spares also available


DISC

| Product | Color Temperature | Watt | Voltage | Dimension(MM) |
|------------------|-------------------|------|---------------------|---------------|
| TR-LED400PSR30W | 3000K/4000K/6000K | 30W | 100 - 285V AC, 50Hz | Ø400X65 |
| TR-LED600PSR40W | 3000K/4000K/6000K | 40W | 100 - 285V AC, 50Hz | Ø600X65 |
| TR-LED800PSR50W | 3000K/4000K/6000K | 50W | 100 - 285V AC, 50Hz | Ø800X65 |
| TR-LED1000PSR60W | 3000K/4000K/6000K | 60W | 100 - 285V AC, 50Hz | Ø1000X65 |
| TR-LED1200PSR70W | 3000K/4000K/6000K | 70W | 100 - 285V AC, 50Hz | Ø1200X65 |

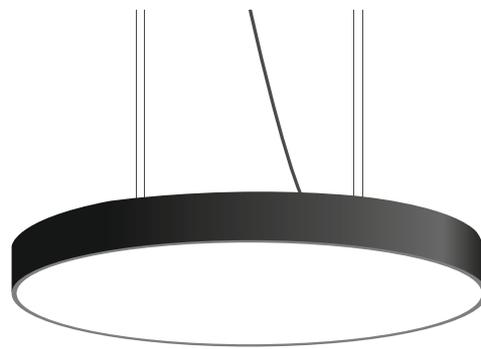

DISC+

| Product | Color Temperature | Watt | Voltage | Dimension(MM) |
|--------------------|-------------------|------|---------------------|---------------|
| TR-LEDIS400PSR30W | 3000K/4000K/6000K | 30W | 100 - 285V AC, 50Hz | Ø400X65 |
| TR-LEDIS600PSR40W | 3000K/4000K/6000K | 40W | 100 - 285V AC, 50Hz | Ø600X65 |
| TR-LEDIS800PSR50W | 3000K/4000K/6000K | 50W | 100 - 285V AC, 50Hz | Ø800X65 |
| TR-LEDIS1000PSR60W | 3000K/4000K/6000K | 60W | 100 - 285V AC, 50Hz | Ø1000X65 |

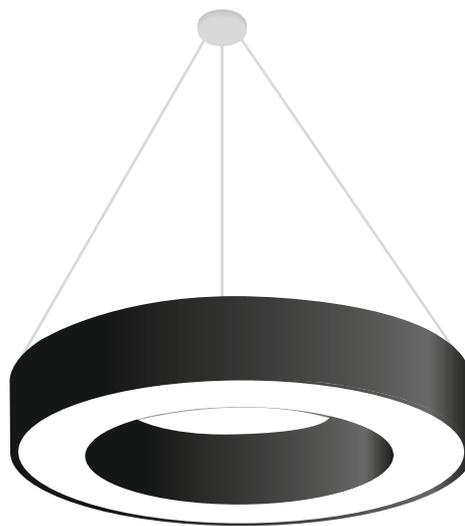

• Available in Red, Yellow, Blue, Cool White, Black

Note: Customize shape, size and powder coating color available upon request.

|| OPEN DISC ||

| Product | Color Temperature | Watt | Voltage | Dimension(MM) |
|--------------------|-------------------|------|---------------------|---------------|
| TR-LEOPD400PSR30W | 3000K/4000K/6000K | 30W | 100 - 285V AC, 50Hz | Ø400X65 |
| TR-LEOPD600PSR40W | 3000K/4000K/6000K | 40W | 100 - 285V AC, 50Hz | Ø600X65 |
| TR-LEOPD800PSR50W | 3000K/4000K/6000K | 50W | 100 - 285V AC, 50Hz | Ø800X65 |
| TR-LEOPD1000PSR60W | 3000K/4000K/6000K | 60W | 100 - 285V AC, 50Hz | Ø1000X65 |



|| CURVE ||

| Product | Color Temperature | Watt | Voltage | Dimension(MM) |
|-------------------|-------------------|------|---------------------|---------------|
| TR-LECUR400PSR20W | 3000K/4000K/6000K | 20W | 100 - 285V AC, 50Hz | 1000X50X70 |
| TR-LECUR600PSR30W | 3000K/4000K/6000K | 30W | 100 - 285V AC, 50Hz | 1000X70X90 |




• Available in Red, Yellow, Blue, Cool White, Black

Note: Customize shape, size and powder coating color available upon request.

QUAD

| Product | Color Temperature | Watt | Voltage | Dimension(MM) |
|------------------|-------------------|------|---------------------|---------------|
| TR-LEQA300PSR24W | 3000K/4000K/6000K | 24W | 100 - 285V AC, 50Hz | 300X300X65 |
| TR-LEQA600PSR48W | 3000K/4000K/6000K | 48W | 100 - 285V AC, 50Hz | 600X600X65 |

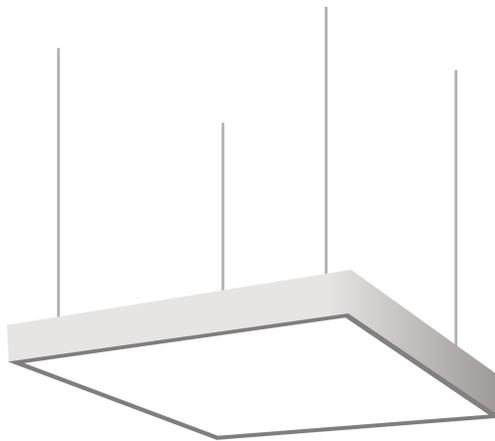

QUAD CURVE

| Product | Color Temperature | Watt | Voltage | Dimension(MM) |
|-------------------|-------------------|------|---------------------|---------------|
| TR-LEQAC300PSR24W | 3000K/4000K/6000K | 24W | 100 - 285V AC, 50Hz | 300X300X65 |
| TR-LEQAC600PSR48W | 3000K/4000K/6000K | 48W | 100 - 285V AC, 50Hz | 600X600X65 |




• Available in Red, Yellow, Blue, Cool White, Black

Note: Customize shape, size and powder coating color available upon request.

QUAD+

| Product | Color Temperature | Watt | Voltage | Dimension(MM) |
|-------------------|-------------------|------|---------------------|---------------|
| TR-LEQAP300PSR24W | 3000K/4000K/6000K | 24W | 100 - 285V AC, 50Hz | 300X300X65 |
| TR-LEQAP600PSR48W | 3000K/4000K/6000K | 48W | 100 - 285V AC, 50Hz | 600X600X65 |

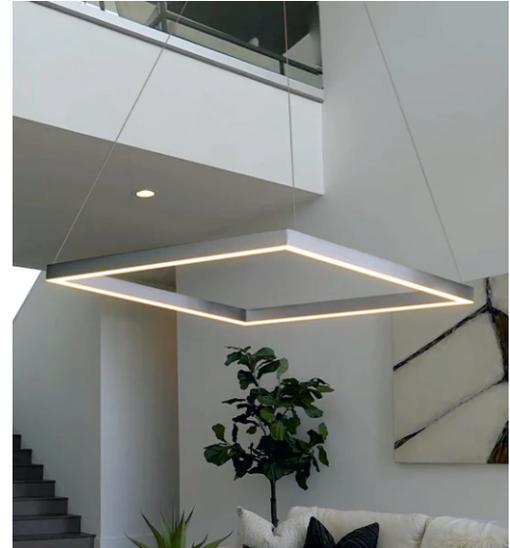

HEXAD

| Product | Color Temperature | Watt | Voltage | Dimension(MM) |
|-------------------|-------------------|------|---------------------|---------------|
| TR-LEHA400PSR30W | 3000K/4000K/6000K | 30W | 100 - 285V AC, 50Hz | 350X90 |
| TR-LEHA600PSR40W | 3000K/4000K/6000K | 40W | 100 - 285V AC, 50Hz | 550X90 |
| TR-LEHA800PSR50W | 3000K/4000K/6000K | 50W | 100 - 285V AC, 50Hz | 750X90 |
| TR-LEHA1000PSR60W | 3000K/4000K/6000K | 60W | 100 - 285V AC, 50Hz | 950X90 |




• Available in Red, Yellow, Blue, Cool White, Black

Note: Customize shape, size and powder coating color available upon request.



HEXAD+

| Product | Color Temperature | Watt | Voltage | Dimension(MM) |
|--------------------|-------------------|------|---------------------|---------------|
| TR-LEHAP400PSR30W | 3000K/4000K/6000K | 30W | 100 - 285V AC, 50Hz | 350X90 |
| TR-LEHAP600PSR40W | 3000K/4000K/6000K | 40W | 100 - 285V AC, 50Hz | 550X90 |
| TR-LEHAP800PSR50W | 3000K/4000K/6000K | 50W | 100 - 285V AC, 50Hz | 750X90 |
| TR-LEHAP1000PSR60W | 3000K/4000K/6000K | 60W | 100 - 285V AC, 50Hz | 950X90 |

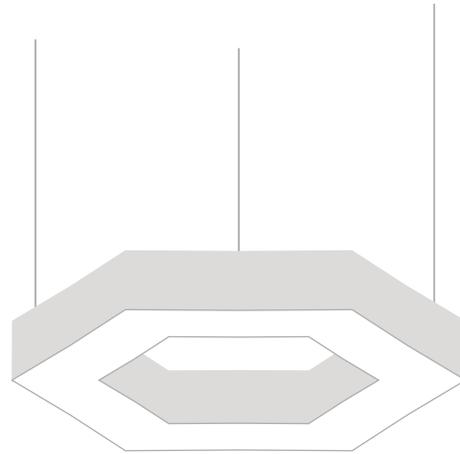

TRIO

| Product | Color Temperature | Watt | Voltage | Dimension(MM) |
|-------------------|-------------------|------|---------------------|---------------|
| TR-LETR400PSR30W | 3000K/4000K/6000K | 30W | 100 - 285V AC, 50Hz | 400X90 |
| TR-LETR600PSR40W | 3000K/4000K/6000K | 40W | 100 - 285V AC, 50Hz | 600X90 |
| TR-LETR800PSR50W | 3000K/4000K/6000K | 50W | 100 - 285V AC, 50Hz | 800X90 |
| TR-LETR1000PSR60W | 3000K/4000K/6000K | 60W | 100 - 285V AC, 50Hz | 1000X90 |

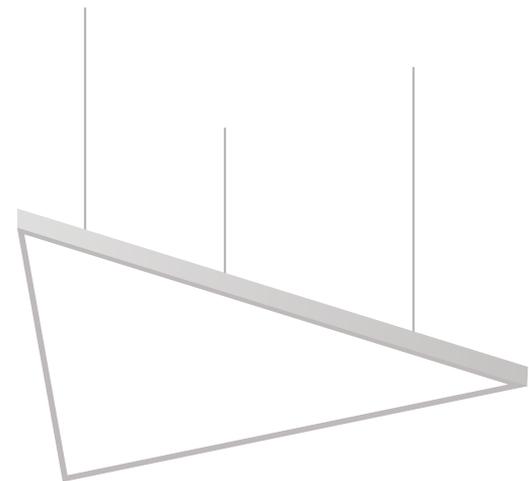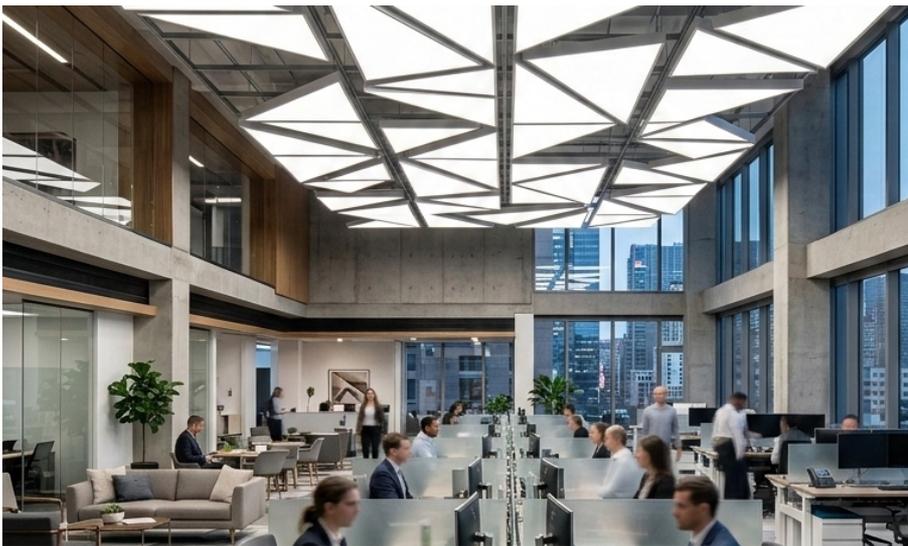

• Available in Red, Yellow, Blue, Cool White, Black

Note: Customize shape, size and powder coating color available upon request.


TRIO+

| Product | Color Temperature | Watt | Voltage | Dimension(MM) |
|--------------------|-------------------|------|---------------------|---------------|
| TR-LETRP400PSR30W | 3000K/4000K/6000K | 30W | 100 - 285V AC, 50Hz | 400X90 |
| TR-LETRP600PSR40W | 3000K/4000K/6000K | 40W | 100 - 285V AC, 50Hz | 600X90 |
| TR-LETRP800PSR50W | 3000K/4000K/6000K | 50W | 100 - 285V AC, 50Hz | 800X90 |
| TR-LETRP1000PSR60W | 3000K/4000K/6000K | 60W | 100 - 285V AC, 50Hz | 1000X90 |



TRIO CURVE

| Product | Color Temperature | Watt | Voltage | Dimension(MM) |
|--------------------|-------------------|------|---------------------|---------------|
| TR-LETRC400PSR30W | 3000K/4000K/6000K | 30W | 100 - 285V AC, 50Hz | 400X90 |
| TR-LETRC600PSR40W | 3000K/4000K/6000K | 40W | 100 - 285V AC, 50Hz | 600X90 |
| TR-LETRC800PSR50W | 3000K/4000K/6000K | 50W | 100 - 285V AC, 50Hz | 800X90 |
| TR-LETRC1000PSR60W | 3000K/4000K/6000K | 60W | 100 - 285V AC, 50Hz | 1000X90 |

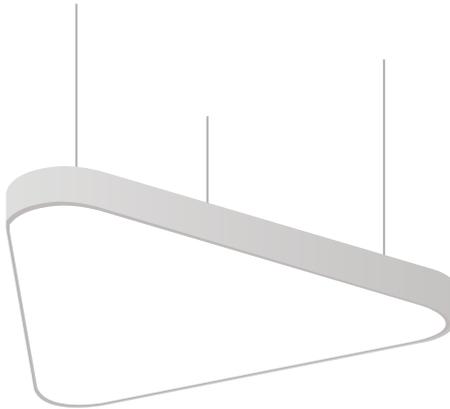

• Available in Red, Yellow, Blue, Cool White, Black

Note: Customize shape, size and powder coating color available upon request.


YES

| Product | Color Temperature | Watt | Voltage | Dimension(MM) |
|------------------|-------------------|------|---------------------|---------------|
| TR-LEYE600PSR30W | 3000K/4000K/6000K | 30W | 100 - 285V AC, 50Hz | 600X70 |
| TR-LEYE900PSR40W | 3000K/4000K/6000K | 40W | 100 - 285V AC, 50Hz | 900X70 |





BLOOM

| Product | Color Temperature | Watt | Voltage | Dimension(MM) |
|------------------|-------------------|------|---------------------|---------------|
| TR-LEBL400PSR20W | 3000K/4000K/6000K | 20W | 100 - 285V AC, 50Hz | 400X90 |
| TR-LEBL600PSR30W | 3000K/4000K/6000K | 30W | 100 - 285V AC, 50Hz | 600X90 |
| TR-LEBL800PSR40W | 3000K/4000K/6000K | 40W | 100 - 285V AC, 50Hz | 800X90 |

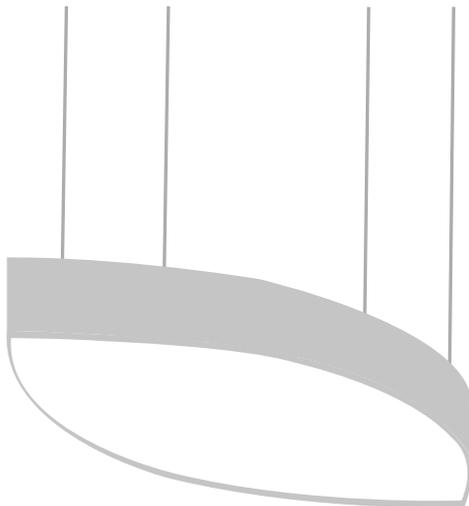

• Available in Red, Yellow, Blue, Cool White, Black

Note: Customize shape, size and powder coating color available upon request.

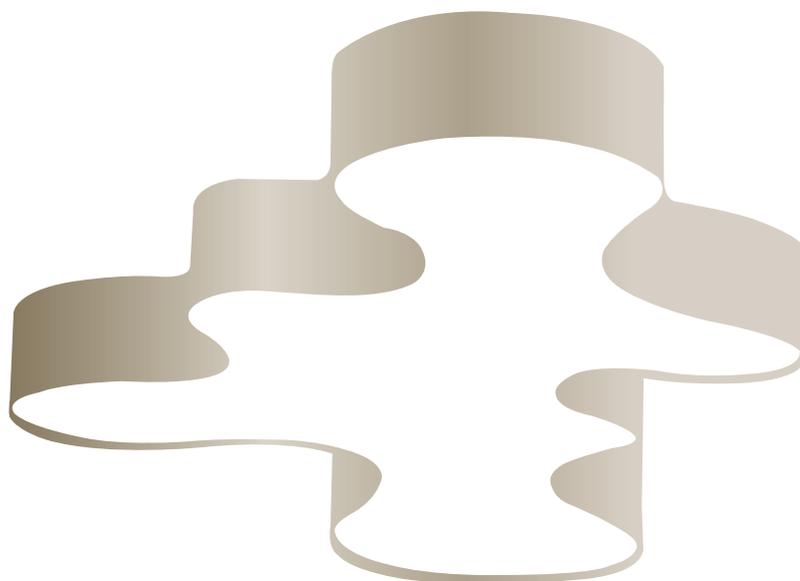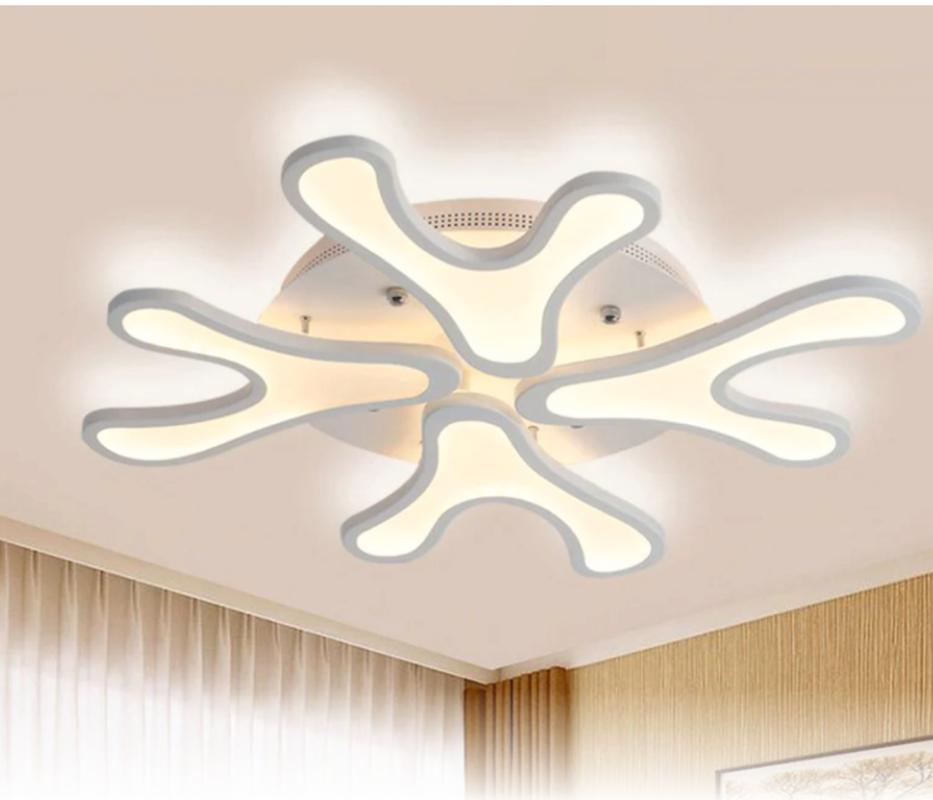

SWING

| Product | Color Temperature | Watt | Voltage | Dimension(MM) |
|-----------------|-------------------|------|---------------------|---------------|
| TR-LESW400PS30W | 3000K/4000K/6000K | 30W | 100 - 285V AC, 50Hz | 300X90 |
| TR-LESW600PS40W | 3000K/4000K/6000K | 40W | 100 - 285V AC, 50Hz | 600X90 |
| TR-LESW600PS40W | 3000K/4000K/6000K | 60W | 100 - 285V AC, 50Hz | 900X90 |
| TR-LESW600PS40W | 3000K/4000K/6000K | 75W | 100 - 285V AC, 50Hz | 1200X90 |

• Available in Red, Yellow, Blue, Cool White, Black

Note: Customize shape, size and powder coating color available upon request.

TRECO[®]
LIGHTING

Glowing through *Life.*
one LED at a time



In shades **of light**

Tejora is a balanced combination of the highest quality design, intelligent technologies and art, which provides extremely wide arrangement possibilities.

It's a collection which allows to create multi-coloured variants of luminaires. The combination of their different versions - suspended, wall and floor luminaires - allows for creating phenomenal lighting and decorative compositions.

The LED modules used in the luminaires ensure a high level of energy efficiency. The steel, robust, yet visually subtle housing can be painted in two different colours from the inspired by both inside and outside.

Tejora luminaires are also available with DALI control as option, which allows you to adjust the luminous flux. Our team of engineers and technologists can also program the luminaires according to the specific needs of investors and architects to enable light control in multi-luminaire compositions.

TEJORA COLLECTION

by Treco Lighting



different versions

- 01 **Tejora suspended**
Suspended version of the luminaire
- 02 **Tejora wall lamp**
Three lengths of wall lamps
- 03 **Tejora XS wall lamp**
Wall lamp
- 04 **Tejora free-standing version**
Free-standing version of the luminaire

ARCHITECTURAL LIGHTING



Tejora free-standing version

max.
104 lm/W IP20

| | | | |
|---------------------|---------------|----------------------|--------------------------------------|
| Rated power [W]: | 23 - 44 | Body colour: | all powderd coating colour available |
| Luminous flux [lm]: | 1300 - 4500 | Diffuser material: | PC |
| Mounting method: | free standing | Diffuser type: | OPAL |
| Body material: | steel | Dimensions A/B [mm]: | 1246/Ø220 1807/Ø260 |


Distinguishing features:

- Minimalist design crafted by Dorota Koziara
- The luminaires are available in all powderd coating colour available including multi-colour variants
- Versions with DALI control available



Light Your
World



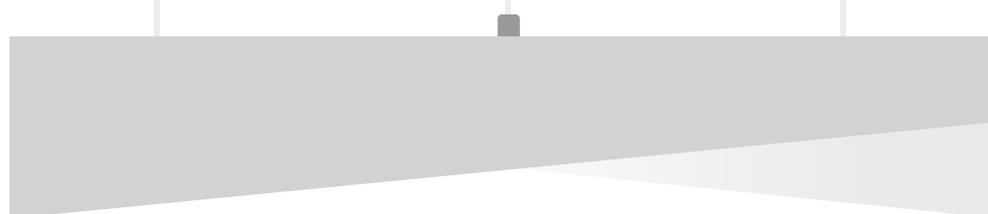

The world-famous designer has created a collection of LED luminaires for us. The idea of the project is to combine the magic of light with a highly energy-saving lighting system.

RAL= Powered Coated Dorota Koziara has a wide approach to design, as a designer she also deals with the promotion of design, company development strategy through design and design criticism. She's been designing for many renowned companies. For many years she has also been the curator and organiser of exhibitions promoting design in the international field.

Her works have been presented at numerous exhibitions in Poland and abroad, including in Milan, London, Paris, New York, Berlin, Tokyo and Zurich. She has been the laureate in the international sculpture competition "Third Millennium" in Italy for the installation of "12 Angels" in Tuscany, Italy.

————— **We support** your vision

TRECO[®]
LIGHTING





TEJORA


max. 106 lm/W IP20 

| | |
|---------------------|--|
| Rated power [W]: | 18 - 64 |
| Luminous flux [lm]: | 670 - 5700 |
| Mounting method: | surface-mounted, wall-mounted, suspended |
| Body material: | steel |

| | |
|------------------------|--------------------------------------|
| Body colour: | all powderd coating colour available |
| Diffuser material: | PC |
| Diffuser type: | OPAL |
| Dimensions A/B/C [mm]: | 701/130/80, 1261/130/80, 1541/130/80 |


Distinguishing features:

- Minimalist design crafted by Dorota Koziara
- The luminaires are available in all powderd coating colour available including multi-colour variants
- Versions with DALI control available
- Adjustable suspension length

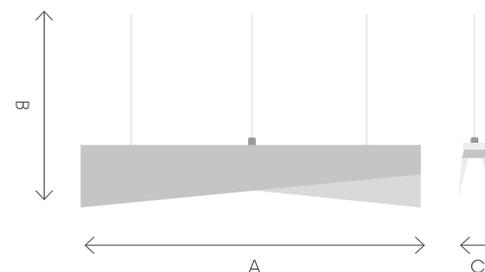

TRECO[®]
LIGHTING



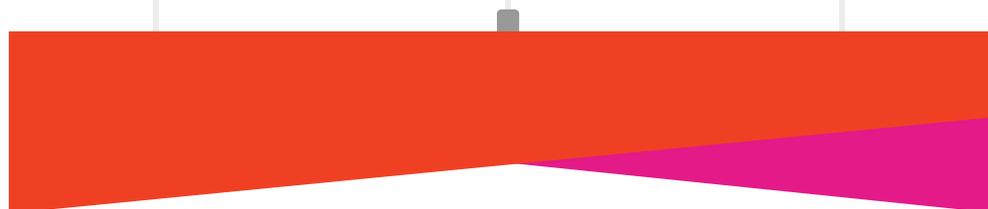

TEJORA WALL LAMP


max.
95 lm/W IP20 ⊥

| | |
|---------------------|-------------------------------|
| Rated power [W]: | 18 - 64 |
| Luminous flux [lm]: | 670 - 5700 |
| Mounting method: | surface-mounted, wall-mounted |
| Body material: | steel |

| | |
|------------------------|--|
| Body colour: | any from the RAL palette |
| Diffuser material: | PC |
| Diffuser type: | OPAL |
| Dimensions A/B/C [mm]: | 701/128/106, 1261/128/106, 1541/128/106 |

Distinguishing features:

- Minimalist design crafted by Dorota Koziara
- The luminaires are available in all powderd coating colour available including multi-colour variants
- Versions with DALI control available

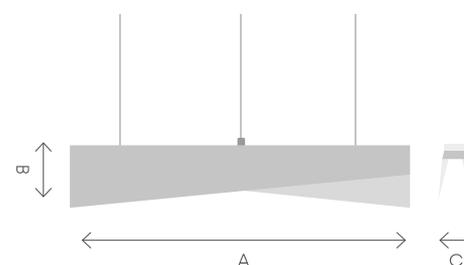

TRECO
LIGHTING





TEJORA XS WALL LAMP


max.
95 lm/W IP20 

| | |
|---------------------|-------------------------------|
| Rated power [W]: | 2 |
| Luminous flux [lm]: | 59 - 100 |
| Mounting method: | surface-mounted, wall-mounted |
| Body material: | steel |

| | |
|------------------------|--------------------------------------|
| Body colour: | all powderd coating colour available |
| Diffuser material: | PC |
| Diffuser type: | OPAL |
| Dimensions A/B/C [mm]: | 200/130/140 |

Distinguishing features:

- Minimalist design crafted by Dorota Koziara
- The luminaires are available in all powderd coating colour available including multi-colour variants
- Versions with DALI control available



OUTDOOR LIGHTS



DECK SINGLE

| Product | Color Temperature | Watt | CRI | Power Factor |
|-------------|-------------------|------|-----|--------------|
| TR-LEDES6W | 3000K/6000K | 6W | >80 | 0.9 |
| TR-LEDES9W | 3000K/6000K | 9W | >80 | 0.9 |
| TR-LEDES12W | 3000K/6000K | 12W | >80 | 0.9 |



SOON

| Product | Color Temperature | Watt | CRI | Power Factor |
|-----------|-------------------|------|-----|--------------|
| TR-LESO6W | 3000K/6000K | 6W | >80 | 0.9 |



DEUCE

| Product | Color Temperature | Watt | CRI | Power Factor |
|-----------|-------------------|------|-----|--------------|
| TR-LEDE3W | 3000K/6000K | 3W | >80 | 0.9 |
| TR-LEDE6W | 3000K/6000K | 6W | >80 | 0.9 |

• Available in Red, Green, Blue, Amber, Ice Blue Color



AQUA

| Product | Color Temperature | Watt | CRI | Power Factor |
|------------|-------------------|------|-----|--------------|
| TR-LEAQ3W | 3000K/6000K | 3W | >80 | 0.9 |
| TR-LEAQ9W | 3000K/6000K | 9W | >80 | 0.9 |
| TR-LEAQ14W | 3000K/6000K | 14W | >80 | 0.9 |
| TR-LEAQ24W | 3000K/6000K | 24W | >80 | 0.9 |



MIC

| Product | Color Temperature | Watt | CRI | Power Factor |
|------------|-------------------|------|-----|--------------|
| TR-LEMI7W | 3000K/6000K | 7W | >80 | 0.9 |
| TR-LEMI12W | 3000K/6000K | 12W | >80 | 0.9 |



MAV

| Product | Color Temperature | Watt | CRI | Power Factor |
|------------|-------------------|------|-----|--------------|
| TR-LEMI7W | 3000K/6000K | 7W | >80 | 0.9 |
| TR-LEMI12W | 3000K/6000K | 12W | >80 | 0.9 |

• Available in Red, Green, Blue, Amber, Ice Blue Color

HALO

| Product | Color Temperature | Watt | CRI | Power Factor |
|-----------|-------------------|------|-----|--------------|
| TR-LEHA7W | 3000K/6000K | 7W | >80 | 0.9 |
| TR-LEHA9W | 3000K/6000K | 9W | >80 | 0.9 |



NATE

| Product | Color Temperature | Watt | CRI | Power Factor |
|------------|-------------------|------|-----|--------------|
| TR-LENA9W | 3000K/6000K | 9W | >80 | 0.9 |
| TR-LENA12W | 3000K/6000K | 12W | >80 | 0.9 |



KRIP

| Product | Color Temperature | Watt | CRI | Power Factor |
|------------|-------------------|------|-----|--------------|
| TR-LEKR12W | 3000K/6000K | 12W | >80 | 0.9 |
| TR-LEKR18W | 3000K/6000K | 18W | >80 | 0.9 |



FITT

| Product | Color Temperature | Watt | CRI | Power Factor |
|------------|-------------------|------|-----|--------------|
| TR-LEFI12W | 3000K/6000K | 12W | >80 | 0.9 |
| TR-LEFI18W | 3000K/6000K | 18W | >80 | 0.9 |



POSE

| Product | Color Temperature | Watt | CRI | Power Factor |
|------------|-------------------|------|-----|--------------|
| TR-LEPO12W | 3000K/6000K | 12W | >80 | 0.9 |
| TR-LEPO18W | 3000K/6000K | 18W | >80 | 0.9 |



• Available in Red, Green, Blue, Amber, Ice Blue Color


OWER

| Product | Color Temperature | Watt | CRI | Power Factor |
|------------|-------------------|------|-----|--------------|
| TR-LEOW12W | 3000K/6000K | 12W | >80 | 0.9 |
| TR-LEOW18W | 3000K/6000K | 18W | >80 | 0.9 |



JETTER

| Product | Color Temperature | Watt | CRI | Power Factor |
|------------|-------------------|------|-----|--------------|
| TR-LEJE6W | 3000K/6000K | 6W | >80 | 0.9 |
| TR-LEJE10W | 3000K/6000K | 10W | >80 | 0.9 |

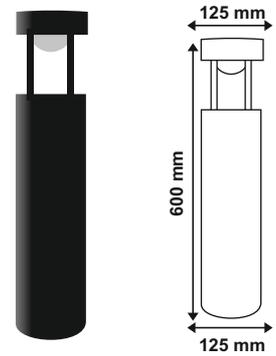


PICKET

| Product | Color Temperature | Watt | CRI | Power Factor |
|------------|-------------------|------|-----|--------------|
| TR-LEPI5W | 3000K/6000K | 5W | >80 | 0.9 |
| TR-LEPI10W | 3000K/6000K | 10W | >80 | 0.9 |





TAPPER

| Product | Color Temperature | Watt | CRI | Power Factor |
|------------|-------------------|------|-----|--------------|
| TR-LETA8W | 3000K/6000K | 8W | >80 | 0.9 |
| TR-LETA16W | 3000K/6000K | 16W | >80 | 0.9 |

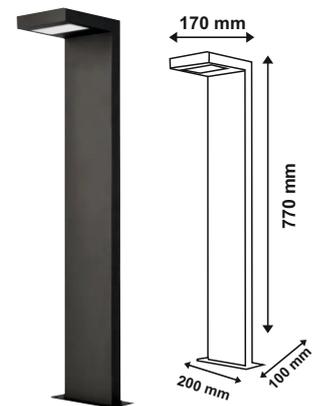

• Available in Red, Green, Blue, Amber, Ice Blue Color

WALL ELEVATION / STEP LIGHTS LENS MODEL

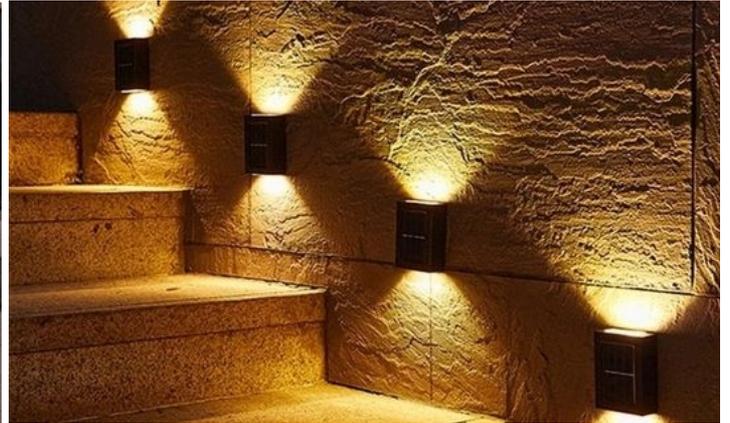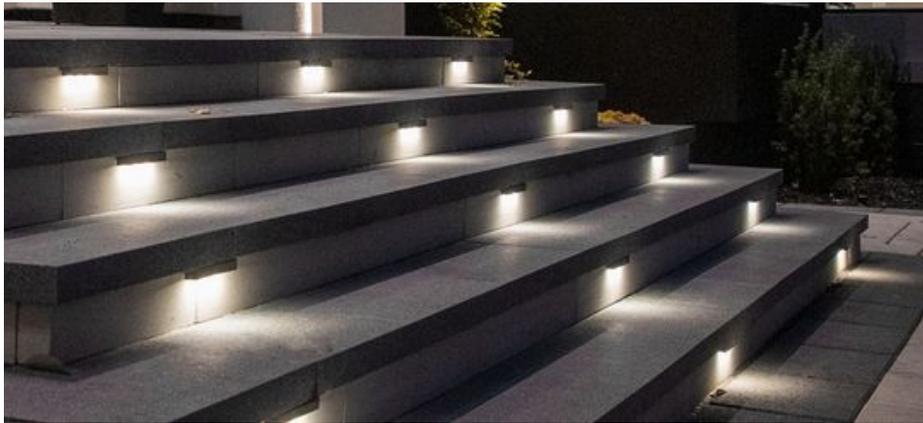


GARDEN SPIKE LIGHT

| Item | Model No. | Input Volt. | Outer Size (mm) | LED Chip | Material | CCT | | |
|------------------|-------------|-------------|-----------------|-----------------|---------------|-----------|-----------|-----------|
| 2 Way Lens Mode | TR-LENS2WAY | 90-265V | 75 x 75 x 50 | Epistar/Osram | Aluminum | 2700-6500 | | |
| 4 Way Lens Mode | TR-LENS4WAY | 90-265V | 75 x 75 x 50 | Epistar/Osram | Aluminum | 2700-6500 | | |
| Item | Model No. | Power | Input Volt. | Outer Size (mm) | COB Size | Material | CCT | |
| 3W K Light 1 Way | TR-KLIGHT03 | 3W | 90-265V | 80 x 80 x 65 | 11mm | Aluminum | 2700-6500 | |
| 6W K Light 2 Way | TR-KLIGHT06 | 6W | 90-265V | 145 x 80 x 65 | 11mm | Aluminum | 2700-6500 | |
| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Cut Size (mm) | Material | CCT | |
| 3W LED STEP Ligh | TR-STEP03 | 3W | 90-265V | 85 x 85 x 50 | 67 x 67 | Aluminum+ | 2700-6500 | |
| 6W LED STEP Ligh | TR-STEP06 | 6W | 90-265V | 145 x 70 x 55 | 135 x 65 | Aluminum | 2700-6500 | |
| Item | Model No. | Power | nput Volt. | Outer Size (mm) | Type | COB Size | Material | CCT |
| 5W SPIKE Light | TR-SPIKE05 | 5W | 90-265V | 55 x 90 | COB | 11mm | Aluminum | 2700-6500 |
| 7W SPIKE Light | TR-SPIKE07 | 7W | 90-265V | 55 x 90 | COB | 11mm | Aluminum | 2700-6500 |
| 10W SPIKE Light | TR-SPIKE10 | 10W | 90-265V | 65 x 120 | COB | 11mm | Aluminum | 2700-6500 |
| 12W SPIKE Light | TR-SPIKE12 | 12W | 90-265V | 65 x 120 | COB | 11mm | Aluminum | 2700-6500 |
| 15W SPIKE Light | TR-SPIKE15 | 15W | 90-265V | 80 x 110 | COB | 11mm | Aluminum | 2700-6500 |
| 20W SPIKE Light | TR-SPIKE20 | 20W | 90-265V | 80 x 110 | COB | 11mm | Aluminum | 2700-6500 |

• Available in Cool White, Neutral White & Warm White, Green, Blue, Red & Pink

SKD, Housing & Spares also available

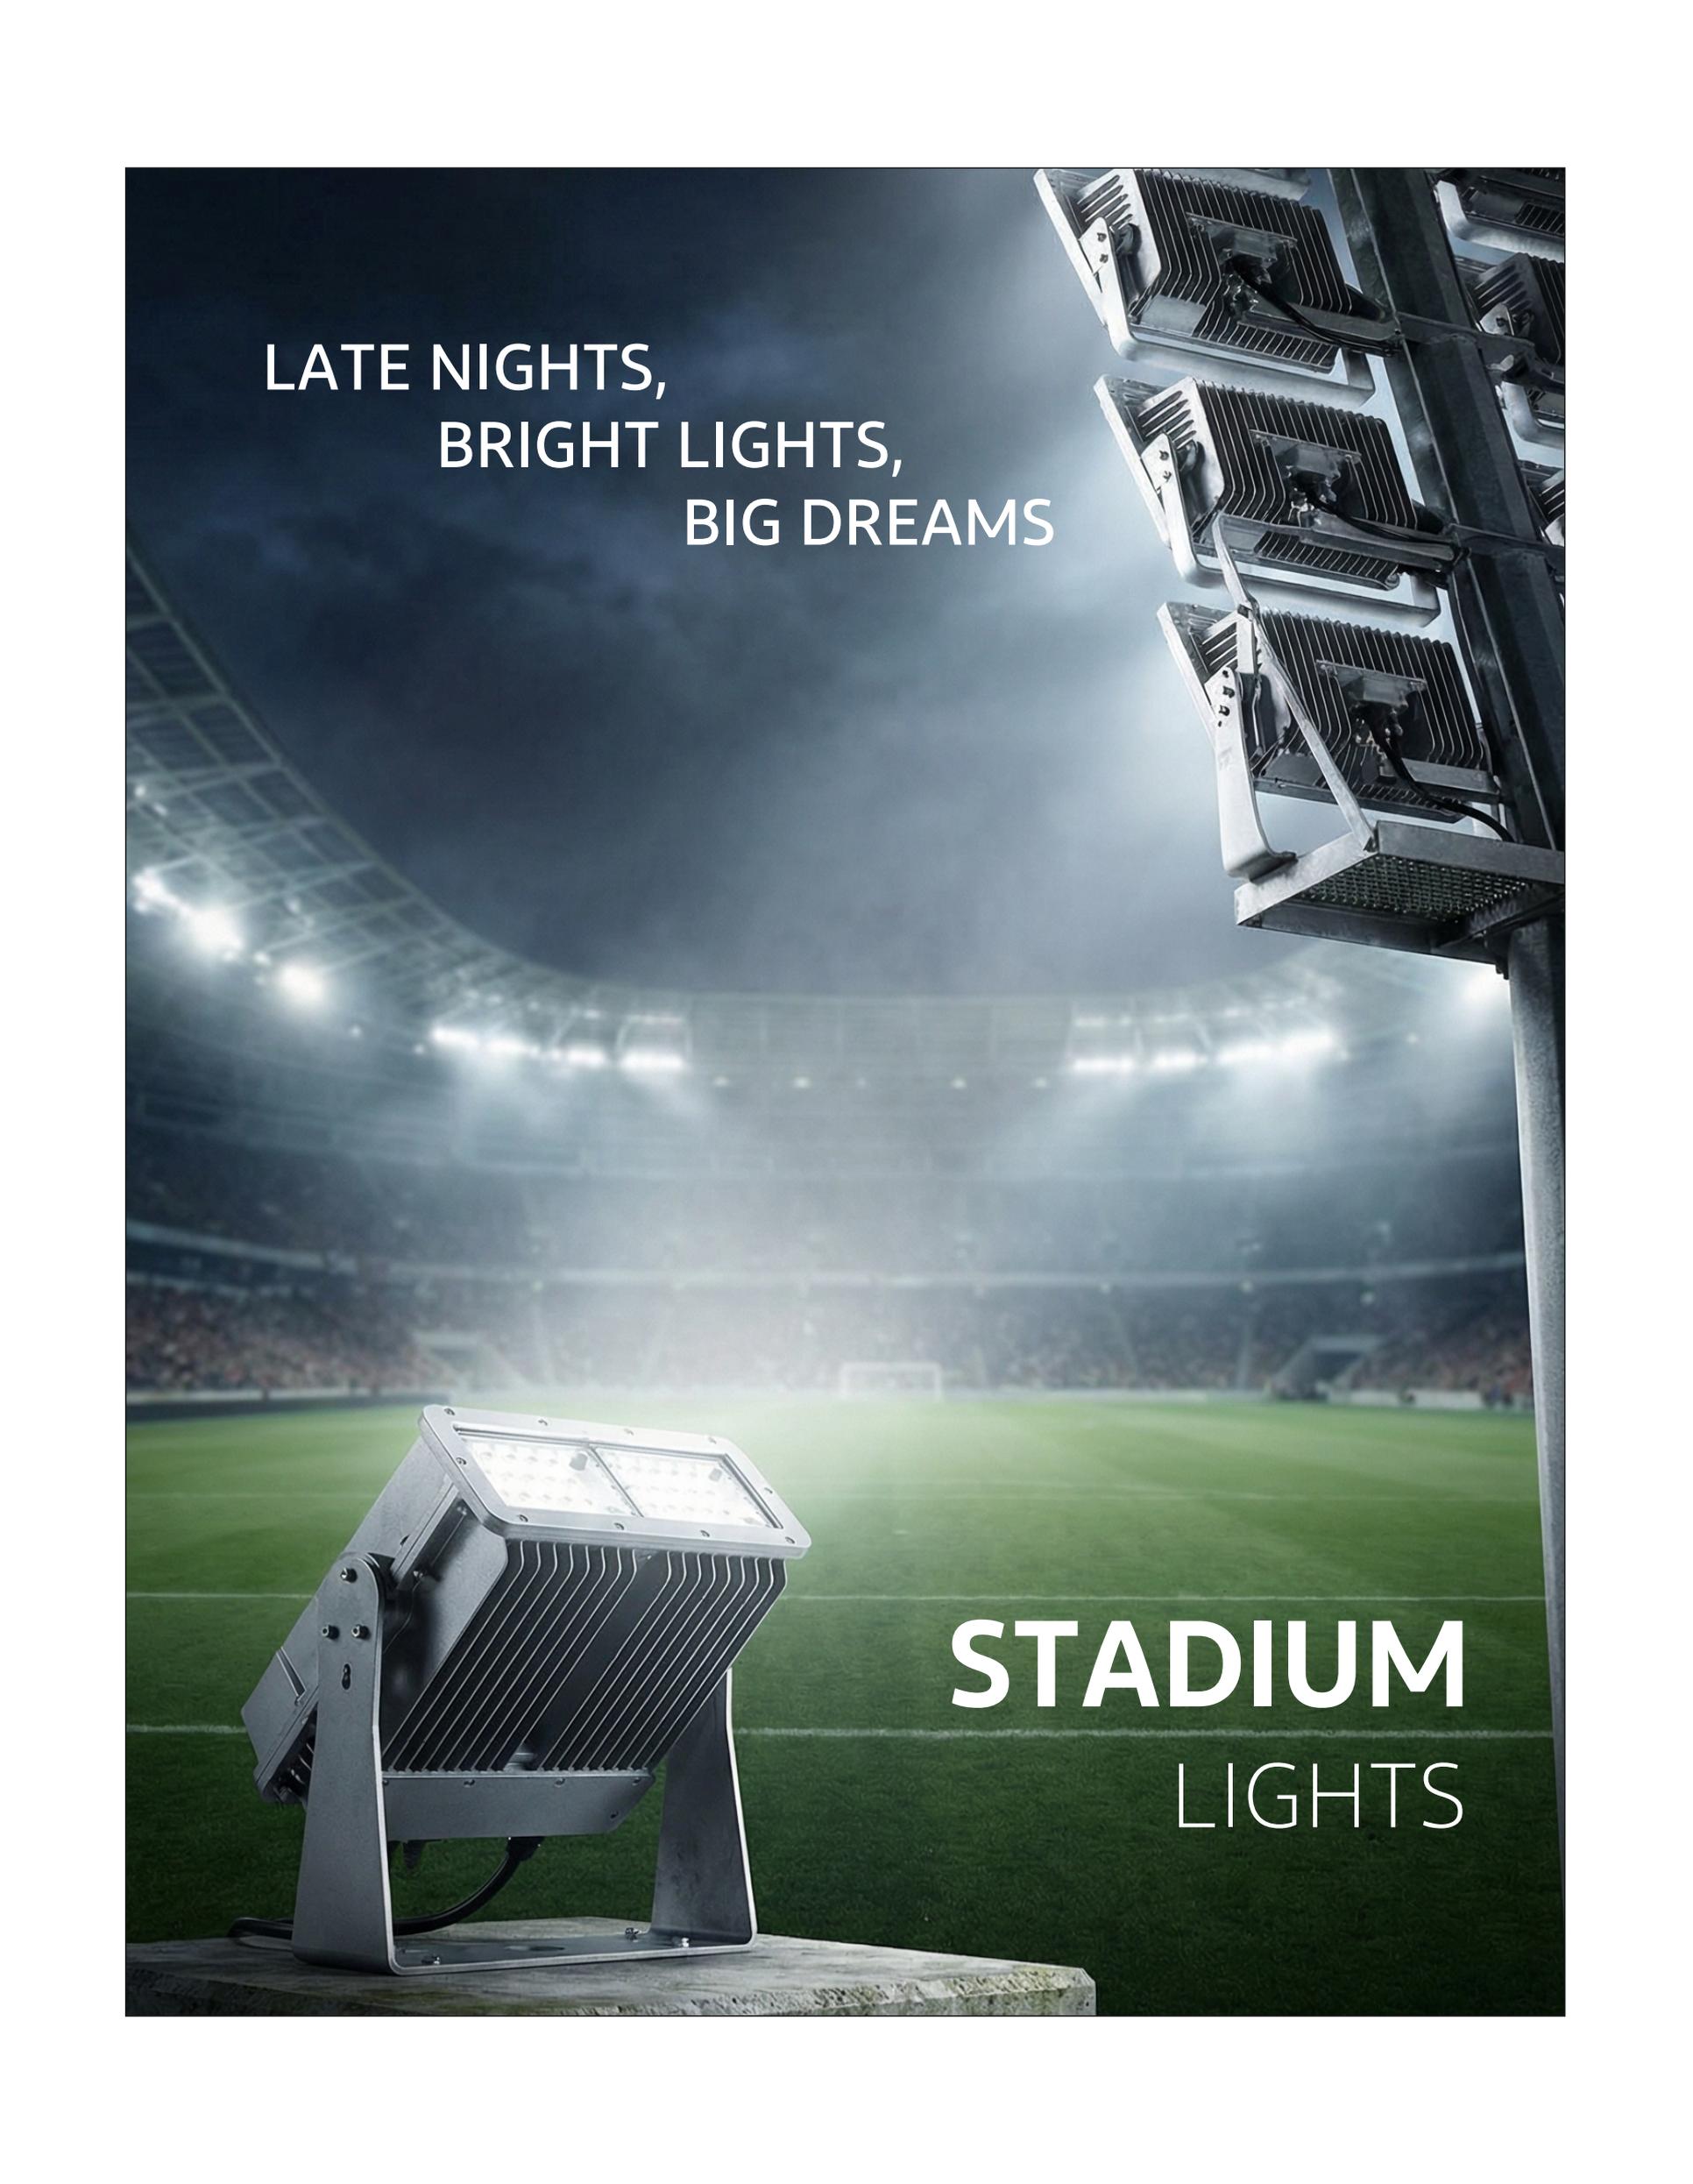

LATE NIGHTS,
BRIGHT LIGHTS,
BIG DREAMS

STADIUM
LIGHTS



**STADIUM
TOWER LIGHTS**



IP65


| Item | Model No. | Power | Input Volt. | LED | No. of LED | Lumens* | Size(mm) | Beam Angle |
|--------------------------|-----------------|-------|-------------|---------|------------|---------|-------------|------------|
| 400W Stadium Flood Light | STADIUMFLOOD400 | 400W | 90-265V | 3030 1W | 470 | 40000 | 420x380x450 | 90° |
| 800W Stadium Flood Light | STADIUMFLOOD800 | 800W | 90-265V | 3030 1W | 940 | 80000 | 450x450x450 | 90° |

• Available in Cool White, Neutral White & Warm White

SKD, Housing & Spares also available

“With the **Government of India’s** visionary green energy mission,
“**SOLAR POWER**” is leading the nation
toward a clean, secure, and self-reliant future.”

S  **LAR**
LIMITLESS, RENEWABLE & EVER FLOWING

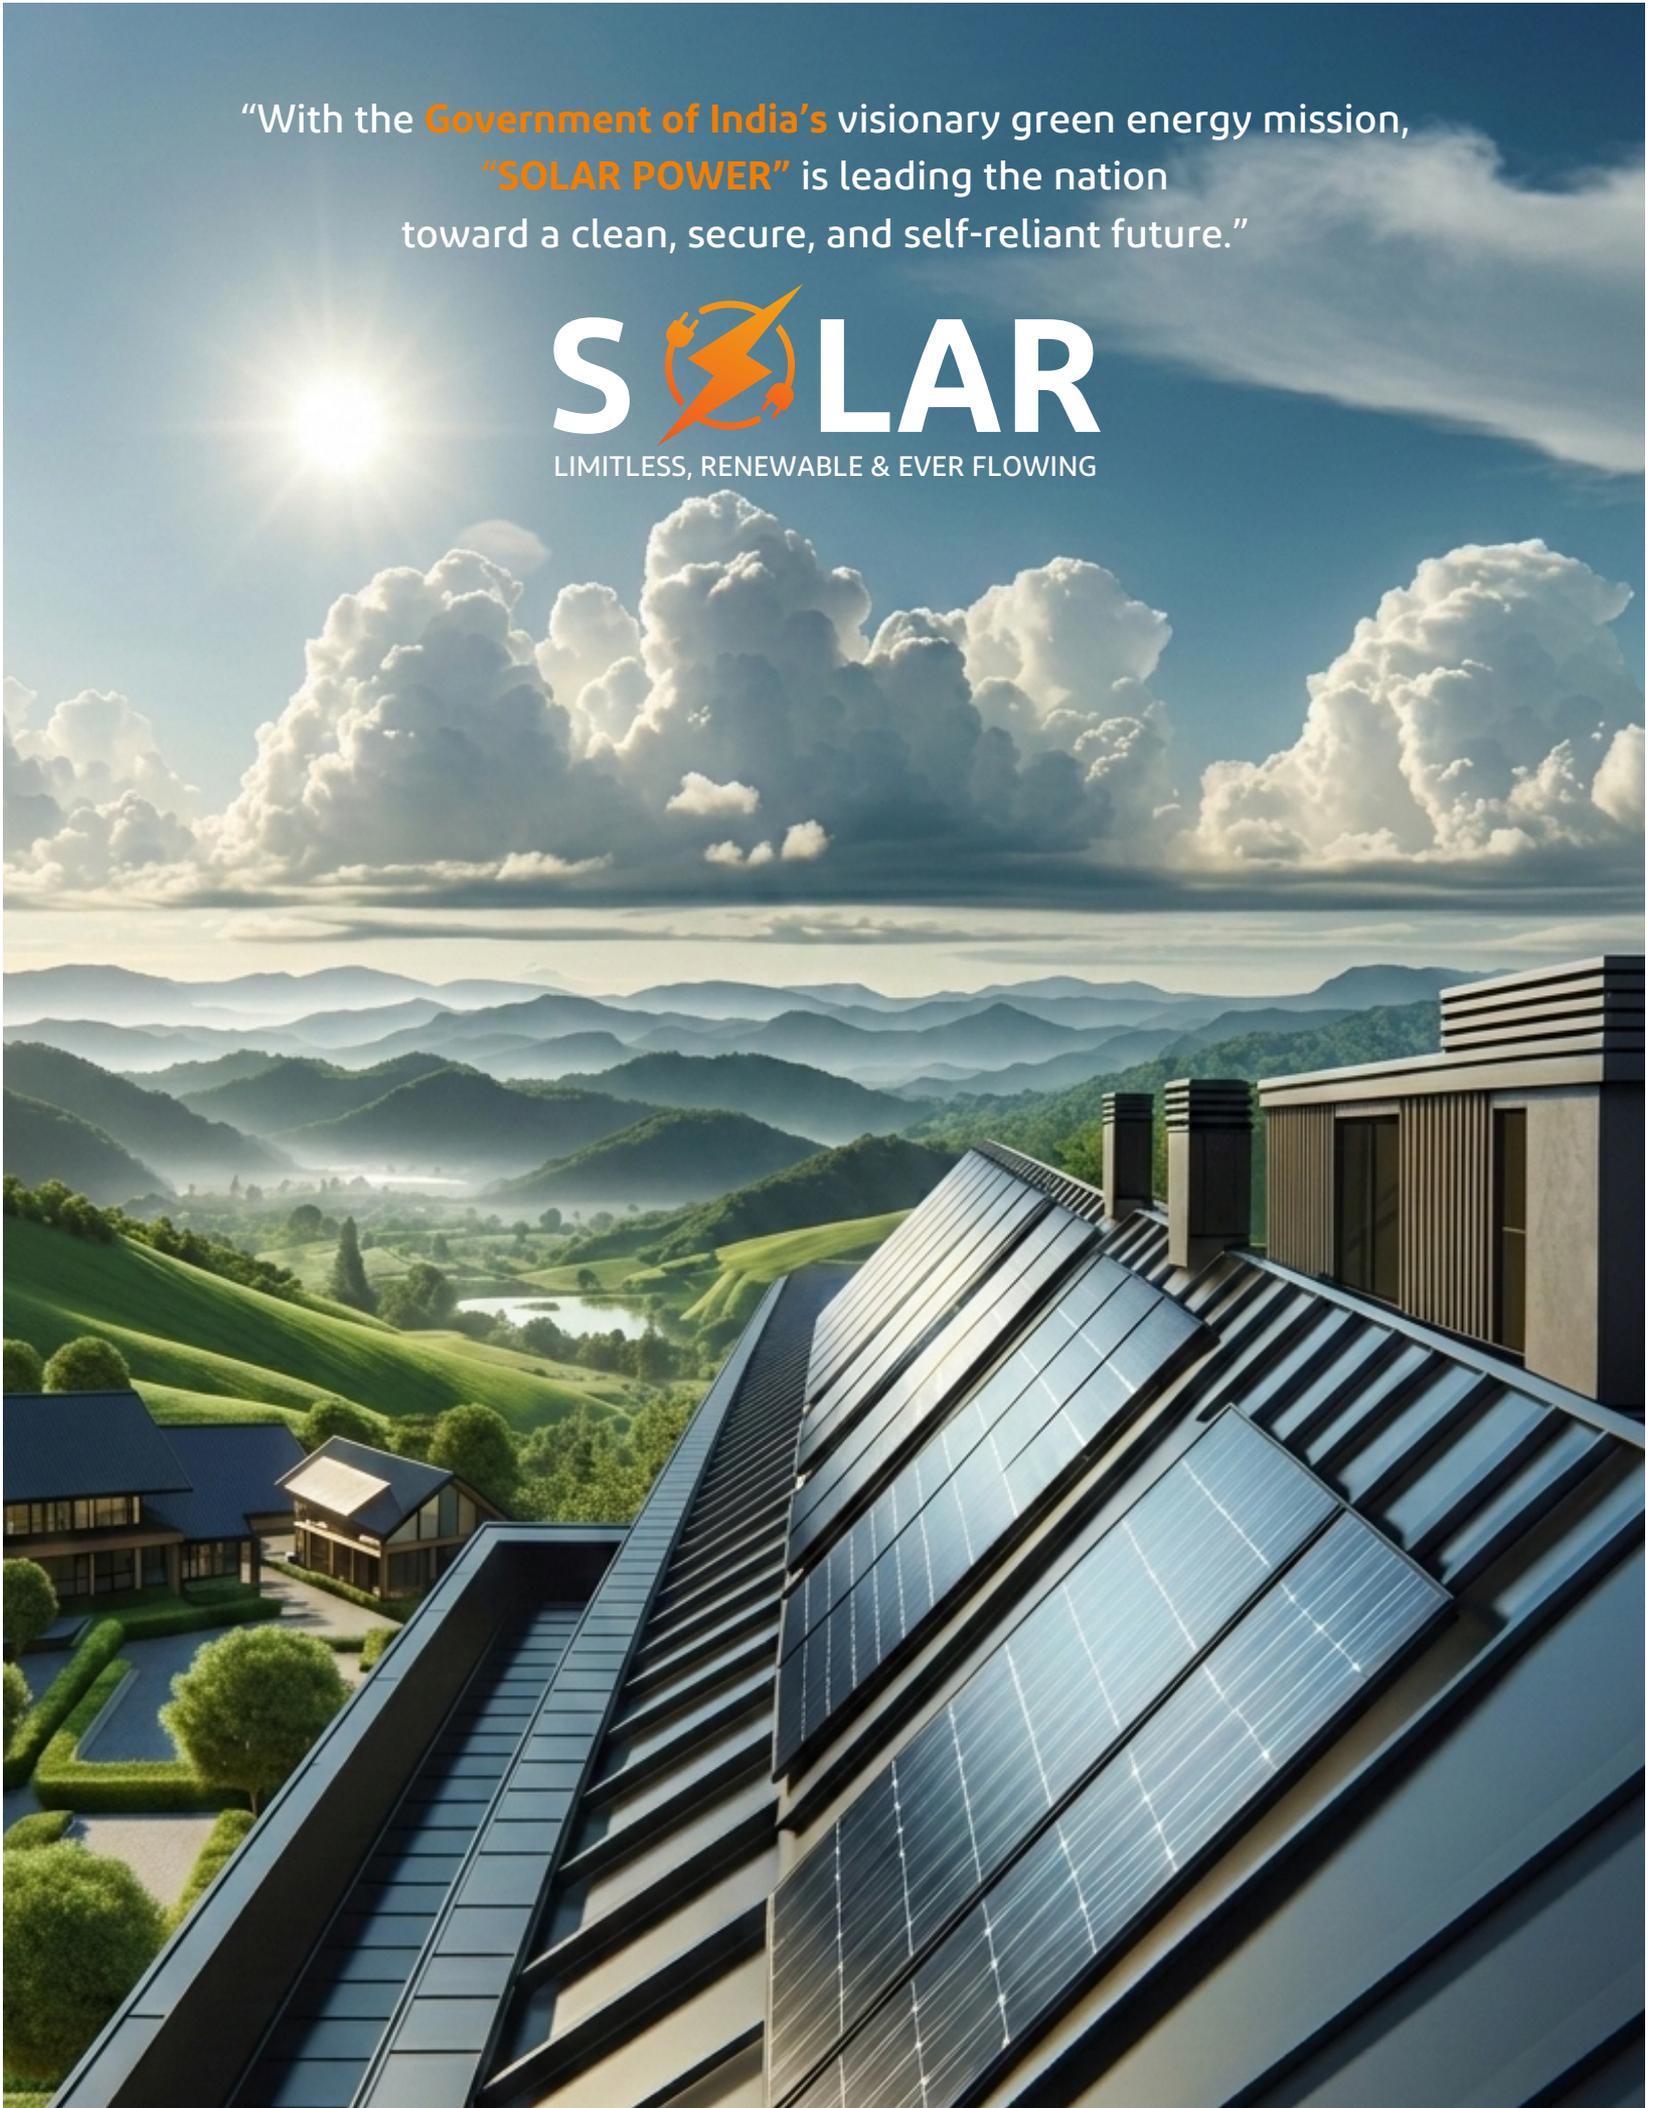

SOLAR FLOOD LIGHTS



| SOLAR FLOOD LIGHT 20W | SOLAR FLOOD LIGHT 30W | SOLAR FLOOD LIGHT 40W |
|-----------------------------|----------------------------|----------------------------|
| MODEL : FLSOLAR-CITY20 | MODEL : FLSOLAR-CITY30 | MODEL : FLSOLAR-CITY40 |
| LED : 332Pcs 5730 | LED : 416Pcs 5730 | LED : 800Pcs 5730 |
| LED POWER : 160W | LED POWER : 210W | LED POWER : 400W |
| PANEL : 5V 20W POLY | PANEL : 5V 30W POLY | PANEL : 5V 35W POLY |
| BATTERY : 3.2V 20Ah LiFePo4 | BATTERY : 3.2V 25A LiFePo4 | BATTERY : 3.2V 36A LiFePo4 |
| CHARGING TIME : 6-8HRS | CHARGING TIME : 6-8HRS | CHARGING TIME : 6-8HRS |
| LIGHTING TIME : 12-16HRS | LIGHTING TIME : 12-16HRS | LIGHTING TIME : 12-16HRS |
| LIGHT COLOUR : COOL WHITE | LIGHT COLOUR : COOL WHITE | LIGHT COLOUR : COOL WHITE |
| SIZE : 260 x 330 x 80 | SIZE : 288 x 365 x 80 | SIZE : 450 x 360 x 110 |

REMOTE

Auto: 100% lighting up at the first 20mins, 70% for 4.5hrs and 30% for remaining hours.
On/Off: Light on and off(no working for light Sensor)
3H: Set up for 3 hours lighting up, after 3 hours light off.
5H: Set up for 5 hours lighting up, after 5 hours light off.
8H: Set up for 8 hours lighting up, after 8 hours light off.
Half light: Set up for 50% lighting up-**Full light:** Set up for 100% lighting up.



| SOLAR FLOOD LIGHT 20W | SOLAR FLOOD LIGHT 30W |
|----------------------------|----------------------------|
| MODEL : FLSOLARINT20 | MODEL : FLSOLARINT30 |
| LED POWER : 160W | LED POWER : 210W |
| PANEL : 5V 20W POLY | PANEL: 5V 30W POLY |
| BATTERY : 3.2V 20A LiFePo4 | BATTERY : 3.2V 30A LiFePo4 |
| CHARGING TIME : 6-8HRS | CHARGING TIME : 6-8HRS |
| LIGHTING TIME : 12HRS | LIGHTING TIME : 12HRS |
| LIGHT COLOUR : COOL WHITE | |
| SIZE : 320 x 250 x 80 | SIZE : 340 x 280 x 95 |

REMOTE

Auto: 100% lighting up at the first 20mins, 70% for 4.5hrs and 30% for remaining hours.
On/Off: Light on and off(no working for light Sensor)
3H: Set up for 3 hours lighting up, after 3 hours light off.
5H: Set up for 5 hours lighting up, after 5 hours light off.
8H: Set up for 8 hours lighting up, after 8 hours light off.
Half light: Set up for 50% lighting up-**Full light:** Set up for 100% lighting up.

• Lighting Time Depends on Working Mode & Battery Charging

SOLAR WALL LIGHT




| MODEL NO. | LED | LED Power | Panel | Battery | Charging Time | Lighting Time* | Size(mm) | Sensor |
|--------------|----------------|-----------|---------------|-------------------|---------------|----------------|----------------|---------------------------------------|
| SOLAR WALL05 | 20LED EPISTAR | 5W | 5V 0.65W Poly | 3.7V 1.2A Lithium | 8 Hrs. | 8-10 Hrs. | 98 x 125 x 50 | Automatic Sensor Activate in Darkness |
| SOLAR WALL10 | 228LED EPISTAR | 10W | 5V 1W Poly | 3.7V 1.5A Lithium | 8 Hrs. | 8-10 Hrs. | 160 x 110 x 55 | Automatic Sensor Activate in Darkness |

*LIGHTING TIME DEPENDS ON WORKING MODE & BATTERY CHARGING



TRECO[®]
LIGHTING

NO ERA OF
LIGHTING
SOLUTION

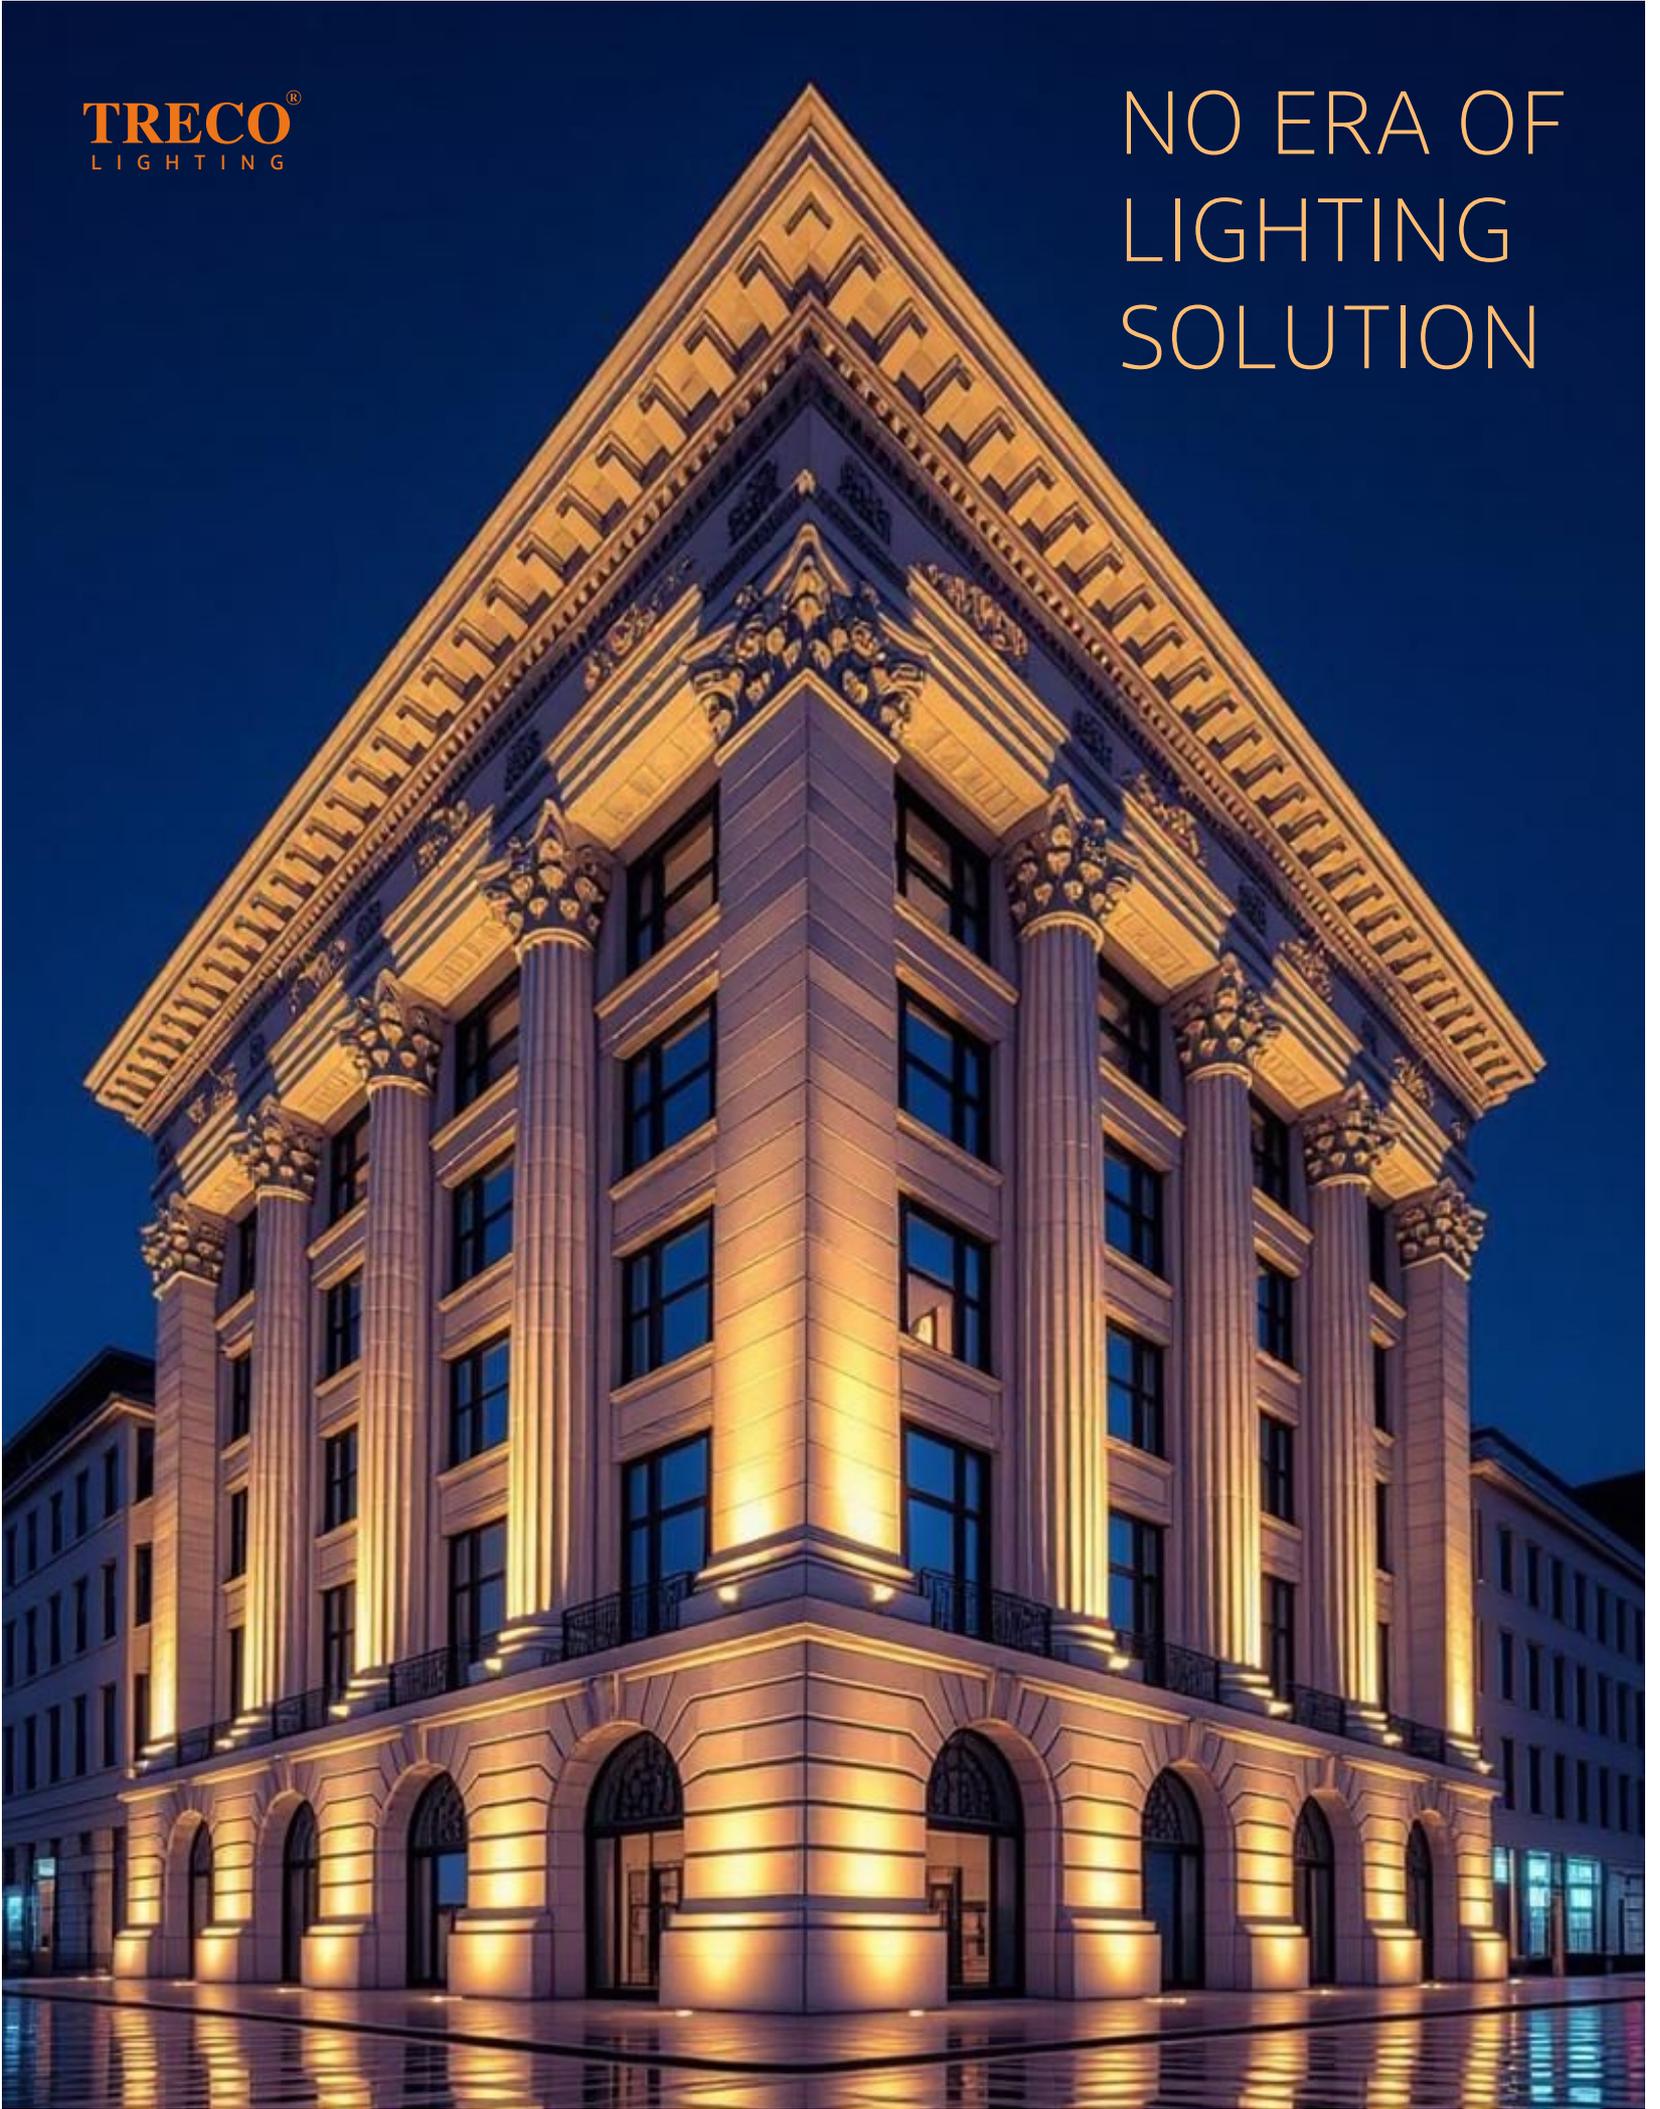

WALL WASHER LIGHT



| Item | Model No. | Power | Input Volt. | Size | No. of LED | Beam Angle | Color | Remarks |
|-----------------|-------------------|-------|-------------|---------|-------------|------------|------------|-----------------|
| 36W WALL WASHER | TR-WW-36W-220V | 36W | 220V AC | 1 Meter | 3030 36Pcs. | 30° | 3000K, RGB | RGB With Remote |
| 36W WALL WASHER | TR-WW-36W-24V | 36W | 24V DC | 1 Meter | 3030 36Pcs. | 30° | 3000K | Linkable |
| 36W WALL WASHER | TR-WW-36W-24V-DMX | 36W | 24V DC | 1 Meter | 3030 36Pcs. | 30° | RGBW | DMX Controlled |

FACADE COLUMN LIGHT



• Available in Cool White, Neutral White, Warm White, Red, Green, Blue & Pink

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Type | COB Size | Material | Beam Angle |
|------------------|-------------------|-------|-------------|-----------------|------|----------|----------|------------|
| 10W COLUMN LIGHT | TR-COLUMNLIGHT-10 | 10W | 90-265V | 70 x 130 | COB | 11mm | Aluminum | 7° |



BURIAL LIGHT

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | Cut Size (mm) | No. of LED | Beam Angle | Color | Remarks |
|------------------|---------------|-------|-------------|-----------------|---------------|-------------|------------|---------|-----------------|
| 3W BURIAL LIGHT | TR-BURIAL-3W | 3W | 220V AC | 100*90 | 95 | 3030 3Pcs. | 30° | WW | RGB With Remote |
| 6W BURIAL LIGHT | TR-BURIAL-6W | 6W | 220V AC | 120*90 | 115 | 3030 6Pcs. | 30° | WW, RGB | RGB With Remote |
| 9W BURIAL LIGHT | TR-BURIAL-9W | 9W | 220V AC | 150*90 | 125 | 3030 9Pcs. | 30° | WW, RGB | RGB With Remote |
| 12W BURIAL LIGHT | TR-BURIAL-12W | 12W | 220V AC | 180*90 | 155 | 3030 12Pcs. | 30° | WW, RGB | RGB With Remote |



UNDERWATER SPOT LIGHTS

| Item | Model No. | Power | Input Volt. | Outer Size (mm) | No. of LED | Beam Angle | Material | Color | Remarks |
|---------------------------|----------------|-------|-------------|-----------------|-------------|------------|----------|---------------|-----------------|
| 3W UNDERWATER SPOT LIGHT | TR-UW-SPOT-3W | 3W | 24V AC/DC | 82 x 140 | 3030 3Pcs. | 30° | SS304 | WW, BLUE | RGB With Remote |
| 6W UNDERWATER SPOT LIGHT | TR-UW-SPOT-6W | 6W | 24V AC/DC | 120 x 140 | 3030 6Pcs. | 30° | SS304 | WW, BLUE, RGB | RGB With Remote |
| 9W UNDERWATER SPOT LIGHT | TR-UW-SPOT-9W | 9W | 24V AC/DC | 145 x 180 | 3030 9Pcs. | 30° | SS304 | WW, BLUE, RGB | RGB With Remote |
| 12W UNDERWATER SPOT LIGHT | TR-UW-SPOT-12W | 12W | 24V AC/DC | 160 x 215 | 3030 12Pcs. | 30° | SS304 | WW, BLUE, RGB | RGB With Remote |

FLOOD LIGHT

Slim Model- IP 65



IP 65

| Item | Model No. | Power | Input Volt. | LED | No. of LED | Lumens* | Size (mm) |
|------------------|--------------|-------|-------------|-----------|------------|---------|----------------|
| 50W Flood Light | TR-FLSLIM50 | 50W | 90-265V | 2835 0.5W | 120 | 5000 | 225 x 225 x 50 |
| 100W Flood Light | TR-FLSLIM100 | 100W | 90-265V | 2835 0.5W | 240 | 10000 | 285 x 285 x 65 |
| 150W Flood Light | TR-FLSLIM150 | 150W | 90-265V | 2835 0.5W | 360 | 15000 | 285 x 320 x 80 |
| 200W Flood Light | TR-FLSLIM200 | 200W | 90-265V | 2835 0.5W | 480 | 20000 | 350 x 320 x 80 |



Slim Model - IP 65

| Item | Model No. | Power | Input Volt. | LED Type | No. of COB | Size (mm) |
|----------------------|-----------------|-------|-------------|----------|------------|----------------|
| 50W RGB Flood Light | TR-FLSLIMRGB50 | 50W | 90-265V | RGB COB | 1 | 225 x 225 x 50 |
| 100W RGB Flood Light | TR-FLSLIMRGB100 | 100W | 90-265V | RGB COB | 2 | 285 x 285 x 65 |



• Available in Cool White, Neutral White, Warm White, Red, Green, Pink & Blue

STAIRCASE STEP LIGHT CONTROLLER



32 CHANNEL STAIRSCASE SENSOR CONTROLLER

CONTROLLER SPECIFICATION



32 Step

MODEL: GSR-V2-STEP-1002
INPUT VOLT. : DC 12V/24V
OUTPUT VOLT. : DC 12V/24V
MAX. LOAD : 12V-15W/Step(Max.300W)
 24V-20W/Step(Max.400W)

NO. OF STEP : 32
PIR SENSOR : INCLUDED (2 Pcs.)
SENSING DISTANCE : 0.1-2M
SIZE : 185X78X25MM
FEATURES: SPEED CONTROL
 STEP CONTROL

32 Step+IC Strip

MODEL: GSR-V2-STEP-1003
INPUT VOLT. : DC 12V/24V
OUTPUT VOLT. : DC 12V/24V
MAX. LOAD : 12V-15W/Step(Max.300W)
 24V-20W/Step(Max.400W)
 12V-150W/Running Strip
 24V-200W/Running Strip

NO. OF STEP : 32
PIR SENSOR : INCLUDED (2 Pcs.)
SENSING DISTANCE : 0.1-2M
SIZE : 185X78X25MM
FEATURES: SPEED CONTROL
 STEP CONTROL

Cove/Neon Strip Light/Rope Light



| Model No. | LED | LED QTY/M | WATTAGE/M | INPUT VOLT. | Colors | PCB Width | IP20/65 | Packing |
|-------------------------------|------|-----------|-----------|-------------|------------|-----------|---------|--------------|
| TR-TRE-220V-ROPE-120L-IP65 | 2835 | 120 | 6.5W | 220V | Warm White | 6mm | IP65 | 50M Per Roll |
| TR-TRE-24V-NEON1616-120L-IP65 | 2835 | 120 | 10W | 24V | Warm White | 8mm | IP65 | 50M Per Roll |
| TR-TRE-24V-COB-320L-IP20 | 2835 | 320 | 20W | 24V | Warm White | 10mm | IP20 | 10M Per Roll |
| TR-TRE-12V-2835-60L-IP20 | 2835 | 60 | 7W | 12V | Warm White | 8mm | IP20 | 5M Per Roll |
| TR-TRE-12V-5050-60L-IP20 | 5050 | 60 | 12W | 12V | Warm White | 10mm | IP20 | 5M Per Roll |
| TR-TRE-12V-2835-120L-IP20 | 2835 | 120 | 10W | 12V | Warm White | 8mm | IP20 | 5M Per Roll |
| TR-TRE-12V-2835-180L-IP20 | 2835 | 180 | 15W | 12V | Warm White | 10mm | IP20 | 5M Per Roll |
| TR-TRE-12V-2835-240L-IP20 | 2835 | 240 | 20W | 12V | Warm White | 10mm | IP20 | 5M Per Roll |
| TR-TRE-12V-2835-60L-IP65 | 2835 | 60 | 7W | 12V | Warm White | 8mm | IP65 | 5M Per Roll |
| TR-TRE-12V-2835-120L-IP65 | 2835 | 120 | 10W | 12V | Warm White | 8mm | IP65 | 5M Per Roll |
| TR-TRE-12V-5050-60L-RGB-IP20 | 5050 | 60 | 12W | 12V | RGB | 10mm | IP20 | 5M Per Roll |

STRIP DIMMER & CONTROLLER

| Model No. | Output Volt. (DC) | Input Volt. | Capacity | Remote |
|------------------------------|--------------------|-------------|----------|--------|
| 12V RGB Controller | 12V 2A Each Colour | 12V DC | Max 5m | YES |
| 12V/24V Single Colour Dimmer | 12V/24V 30A | 12V/24V DC | Max 30A | YES |



CONSTANT VOLTAGE DRIVERS (12v/24v)

| Model No. | Output Volt. (DC) | Current | Power | Input Volt. | Efficiency | Size (mm)* |
|--|-------------------|---------|-------|-------------|------------|------------|
| TR-EXDR12V3A36W | 12V | 3A | 36W | 110-265 | ≥81% | 85x59x33 |
| TR-EXDR12V5A60W | 12V | 5A | 60W | 110-265 | ≥82% | 170x78x37 |
| TR-EXDR12V8A100W | 12V | 8.3A | 100W | 110-265 | ≥83% | 160x98x42 |
| TR-EXDR12V15A180W | 12V | 15A | 180W | 110-265 | ≥83% | 200x98x42 |
| TR-EXDR24V8A200W | 24V | 8.3A | 200W | 110-265 | ≥87% | 162x50x25 |
| TR-EXDR24V16A200W RAIN PROOF | 24V | 16.6A | 400W | 110-265 | ≥88% | 172x117x46 |



READY PROFILE FOR CABINETS
& WARDROBES




CUT FROM **ANYWHERE**




| MODEL NO. | LED | LED QTY/M | WATTAGE/M | INPUT VOLT. | CCT | SIZE | LENGTH |
|----------------------|------|-----------|-----------|-------------|-------|---------|--------|
| PROFILE-1010A-12V-1M | 2835 | 120 | 7W | 12V | WW/NW | 10x10mm | 1m |
| PROFILE-1010A-12V-3M | 2835 | 120 | 7W | 12V | WW/NW | 10x10mm | 3m |

• Available in Cool White, Neutral White & Warm White


SKD, Housing & Spares also available




001-TRE-S1012




002-TRE-S1313




003-TRE-S2010




004-TRE-S0619




005-TRE-S2609




006-TRE-S2310




064-TRE-R1410




065-TRE-R0609




066-TRE-R3012




067-TRE-R3015




068-TRE-R4609




007-TRE-S0809




010-TRE-S1606




069-TRE-R0809




073-TRE-R1606



037-TRE-S2607




038-TRE-S1530




039-TRE-S3213




040-TRE-S1806




041-TRE-S2110




042-TRE-S1324




043-TRE-S3416




044-TRE-S3416




045-TRE-S4716




046-TRE-S4716




047-TRE-S2226




048-TRE-S2230




049-TRE-S3230




050-TRE-S1920




112-TRE-R5109




113-TRE-R7034




114-TRE-R3134




115-TRE-R1512




116-TRE-R3017




117-TRE-R2012



118-TRE-R1318




119-TRE-R1625




122-TRE-R2610


SURFACE MOUNT PROFILE




007-TRE-S0809




008-TRE-S1310




009-TRE-S1214




010-TRE-S1606




011-TRE-S1612




012-TRE-S1618




013-TRE-S2512




014-TRE-S2518




015-TRE-S2418




016-TRE-S2525




017-TRE-S3520




018-TRE-S3713




019-TRE-S3535




020-TRE-S5020




021-TRE-S5035




022-TRE-S5050




023-TRE-S7535




024-TRE-S6080



025-TRE-S2530




026-TRE-S2525




063-TRE-S4142




SURFACE MOUNT CORNER PROFILE




027-TRE-S1616




028-TRE-S1818




029-TRE-1919




030-TRE-S3030




030-TRE-S3030




031-TRE-S2629




032-TRE-S2926




033-TRE-S6040



034-TRE-S8060




035-TRE-S8042




036-TRE-S5151




SURFACE MOUNT ON WALL PROFILE




001-TRE-S1012




006-TRE-S2310




051-TRE-S8536




052-TRE-S3461




053-TRE-S3357



054-TRE-S6526




055-TRE-S3225




056-TRE-S3040


SKIRTING & STEP PROFILE




005-TRE-S2710




057-TRE-S1558




058-TRE-S26106




059-TRE-S1880



060-TRE-S5521




061-TRE-S6430



062-TRE-S3212




123-TRE-R3280




001-TRE-R7018


ASYMMETRIC & COVE PROFILE




010-TRE-S1606




013-TRE-S2512




027-TRE-S1616




028-TRE-S1818




029-TRE-1919




033-TRE-S6040




034-TRE-S8060




035-TRE-S8042




039-TRE-S3213





089-TRE-S4322




091-TRE-R1335




092-TRE-R3545

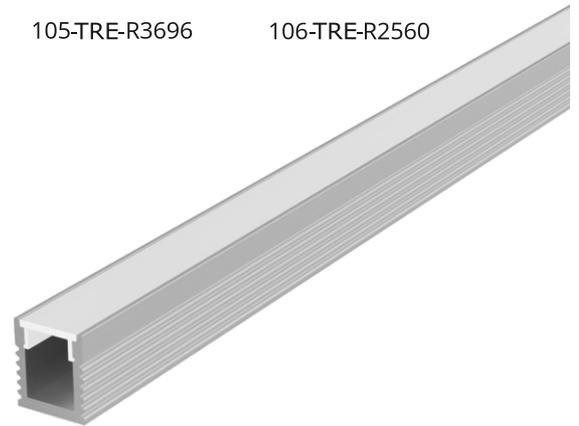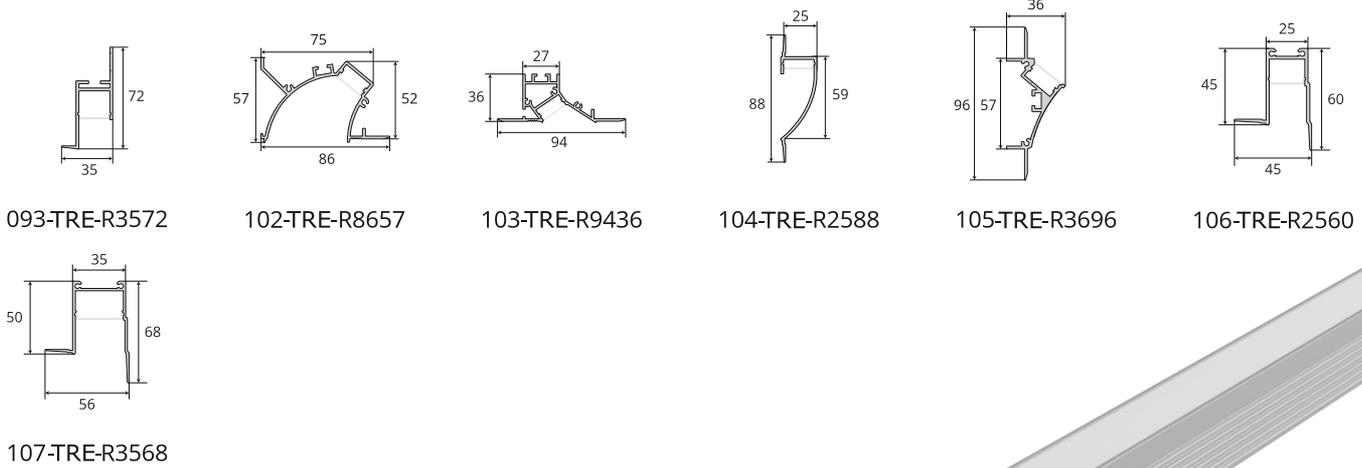


RECESSED MOUNT PROFILE

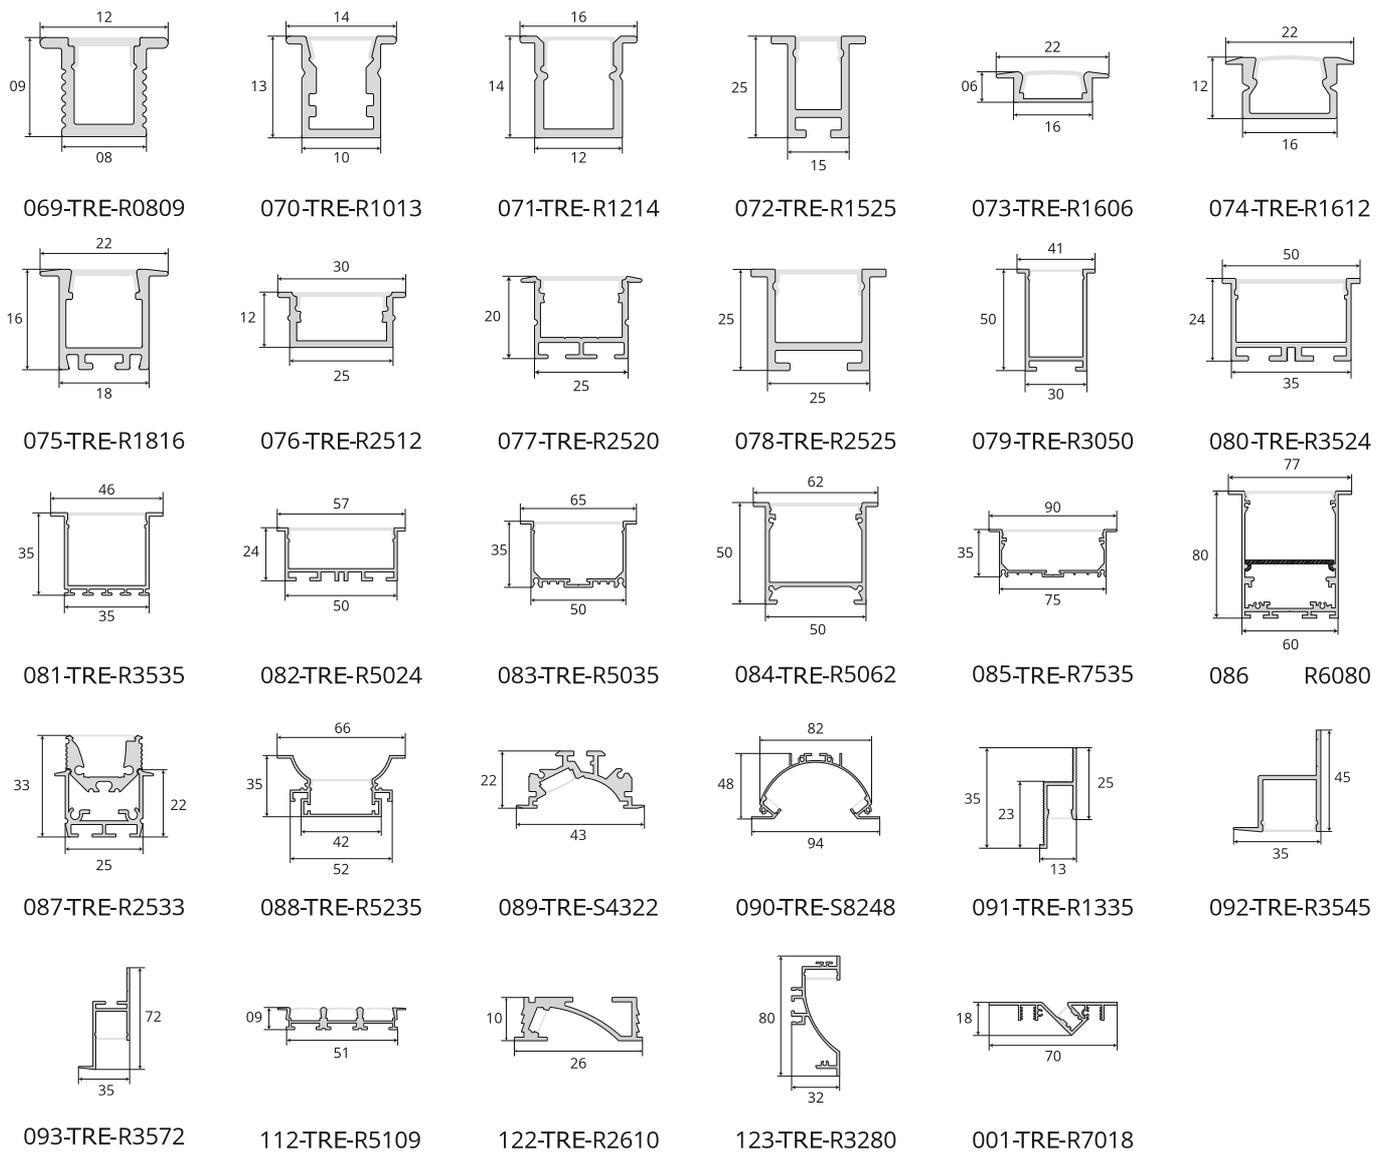


RECESSED MOUNTED - PoP/GYPSUM SERIES




094-TRE-R6076




095-TRE-R8248




096-TRE-R1214




097-TRE-R1214




098-TRE-R1214




099-TRE-R2525




100-TRE-R3535




101-TRE-R5035




102-TRE-R8657




103-TRE-R9436




104-TRE-R2588




105-TRE-R3696




106-TRE-R2560




107-TRE-R3568




108-TRE-R2541




109-TRE-R3550




110-TRE-R1227



111-TRE-R2435




120-TRE-R2112




121-TRE-R2126




LENS PROFILE SERIES




125-TRE-S1618




126-TRE-S1815




126-TRE-S1815




127-TRE-S2125




128-TRE-S2825




129-TRE-S2125




130-TRE-S3425

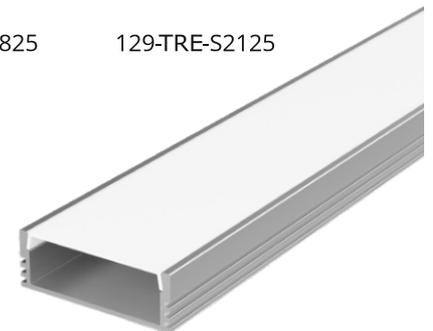


PENDANT PROFILE




024-TRE-S6080




131-TRE-P5045




132-TRE-P5070




133-TRE-P7090




134-TRE-P7590




135-TRE-P1002




136-TRE-P7683




137-TRE-P3065




138-TRE-P5065




139-TRE-P6080




140-TRE-P3030




140-TRE-P3030



141-TRE-P3030




142-TRE-P6030




143-TRE-P0101




LED PROFILE SCORE




144-TRE-R1418



145-TRE-R5218




146-TRE-S4747



147-TRE-S4545




148-TRE-S1145




149-TRE-S1170


LED PROFILE HUB




150-TRE-S2526




151-TRE-R2526

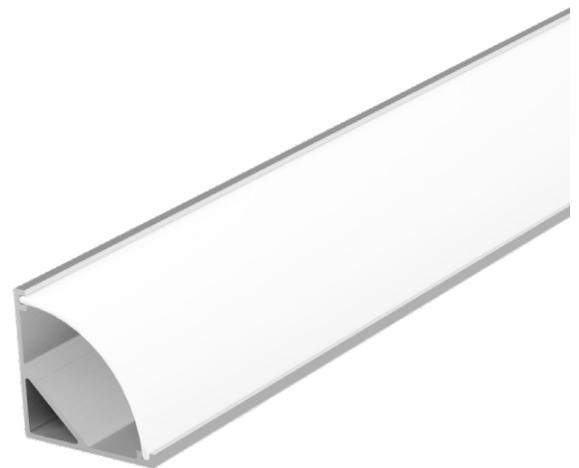


LED PROFILE FLEXIBLE




152-TRE-F1413




153-TRE-F1413




154-TRE-F0808




155-TRE-F1010




156-TRE-F1212




157-TRE-F1313




158-TRE-F1510




159-TRE-F1616




160-TRE-F1616




161-TRE-F2014




162-TRE-F2020




163-TRE-F3020




164-TRE-F1212




165-TRE-F1616




166-TRE-F2021




167-TRE-F3020




168-TRE-F0817




169-TRE-F0410




170-TRE-F1220




171-TRE-F1212



172-TRE-F1616



173-TRE-F2020



174-TRE-F2211



INFRARED MOTION SENSOR RECESSED



| | |
|---------------------|-------------------------------|
| MODEL NO. | TRE-HW06S |
| LOAD CAPACITY | MAX 40W (LED) |
| INPUT VOLTAGE | 220-240V AC |
| DETECTION ANGLE | 110° |
| DETECTION DISTANCE | MAX 1-6M (<23°4-6M, >23°1-4M) |
| TIME DELAY | 40SEC ± 10SEC |
| LUX LEVEL | ≤ 10 |
| IP RATING | IP20 |
| INSTALLATION HEIGHT | 3.5M |
| CUTOUT SIZE | 20MM |

INFRARED MOTION SENSOR RECESSED



| | |
|---------------------|-------------------------------|
| MODEL NO. | TRE-HW08KT |
| LOAD CAPACITY | MAX 40W (LED) |
| INPUT VOLTAGE | 220-240V AC |
| DETECTION ANGLE | 110° |
| DETECTION DISTANCE | MAX 1-6M (<23°4-6M, >23°1-4M) |
| TIME DELAY | 5MIN, 45SEC, 15SEC |
| LUX LEVEL | ≤ 2LUX, 25LUX, 2000LUX |
| IP RATING | IP20 |
| INSTALLATION HEIGHT | 3.5M |
| CUTOUT SIZE | 26MM |

INFRARED MOTION SENSOR SURFACE



| | |
|---------------------|---|
| MODEL NO. | TRE-ST02C-360 |
| LOAD CAPACITY | MAX 300W(LED) 1200W(INCANDESCENT LAMP) |
| INPUT VOLTAGE | 220-240V AC |
| DETECTION ANGLE | 360° |
| DETECTION DISTANCE | MAX 2-12M(<24°) ADJ |
| TIME DELAY | 10SEC TO 7MIN(ADJ) |
| LUX LEVEL | ≤ 10 TO 2000 LUX ADJ |
| IP RATING | IP44 |
| INSTALLATION HEIGHT | 1.8-2.5M |

INFRARED MOTION SENSOR SURFACE



| | |
|---------------------|---|
| MODEL NO. | TRE-ST06-180 |
| LOAD CAPACITY | MAX 300W(LED) 1200W(INCANDESCENT LAMP) |
| INPUT VOLTAGE | 220-240V AC |
| DETECTION ANGLE | 180° |
| DETECTION DISTANCE | MAX 12M(<24°) |
| TIME DELAY | 10SEC TO 7MIN(ADJ) |
| LUX LEVEL | ≤ 10 TO 2000 LUX ADJ |
| IP RATING | IP44 |
| INSTALLATION HEIGHT | 1.8-2.5M |

INFRARED MOTION SENSOR SURFACE



| | |
|---------------------|---|
| MODEL NO. | TRE-ST19A-SM |
| LOAD CAPACITY | MAX 300W(LED) 1200W(INCANDESCENT LAMP) |
| INPUT VOLTAGE | 220-240V AC |
| DETECTION ANGLE | 360° |
| DETECTION DISTANCE | MAX 6M(<24°) |
| TIME DELAY | 10SEC TO 7MIN(ADJ) |
| LUX LEVEL | ≤ 10 TO 2000 LUX ADJ |
| IP RATING | IP20 |
| INSTALLATION HEIGHT | 2.2-4M |

INFRARED MOTION SENSOR RECESSED



| | |
|---------------------|---|
| MODEL NO. | TRE-ST17A1-CON |
| LOAD CAPACITY | MAX 300W(LED) 1200W(INCANDESCENT LAMP) |
| INPUT VOLTAGE | 220-240V AC |
| DETECTION ANGLE | 360° |
| DETECTION DISTANCE | MAX 6M(<24°) |
| TIME DELAY | 10SEC TO 7MIN(ADJ) |
| LUX LEVEL | ≤ 10 TO 2000 LUX ADJ |
| IP RATING | IP44 |
| INSTALLATION HEIGHT | 2.2-4M |
| CUTOUT SIZE | 65MM |

INFRARED MOTION SENSOR MODULAR



| | |
|---------------------|--|
| MODEL NO. | TRE-ST23B-MOD |
| LOAD CAPACITY | MAX 400W(LED) 800W(INCANDESCENT LAMP) |
| INPUT VOLTAGE | 220-240V AC |
| DETECTION ANGLE | 160° |
| DETECTION DISTANCE | MAX 9M(<24°) |
| TIME DELAY | 10SEC TO 7MIN(ADJ) |
| LUX LEVEL | ≤ 10 TO 2000 LUX ADJ |
| IP RATING | IP44 |
| INSTALLATION HEIGHT | 1-1.8M |
| CUTOUT SIZE | 47mm x 52mm |

INFRARED MOTION SENSOR STREET / FLOOD



| | |
|--------------------|--|
| MODEL NO. | TRE-ST01-FL |
| LOAD CAPACITY | MAX 100W(LED) 400W(INCANDESCENT LAMP) |
| INPUT VOLTAGE | 220-240V AC |
| DETECTION ANGLE | 180° |
| DETECTION DISTANCE | MAX 2-12M(<24°) ADJ |
| TIME DELAY | 10SEC TO 6MIN(ADJ) |
| LUX LEVEL | <-10 TO 2000 LUX ADJ |
| IP RATING | IP65 |

DUSK TO DAWN LIGHT SENSOR




| | |
|---------------|-------------------------|
| MODEL NO. | TRE-ST302-10A |
| RATED CURRENT | 10A |
| INPUT VOLTAGE | 220-240V AC |
| LUX LEVEL | <10LUX(ON), >40LUX(OFF) |
| IP RATING | IP44 |

DUSK TO DAWN LIGHT SENSOR



| | |
|---------------|---------------------|
| MODEL NO. | TRE-ST301-6A |
| RATED CURRENT | 6A |
| INPUT VOLTAGE | 220-240V AC |
| LUX LEVEL | <5-50LUX ADJUSTABLE |
| IP RATING | IP44 |

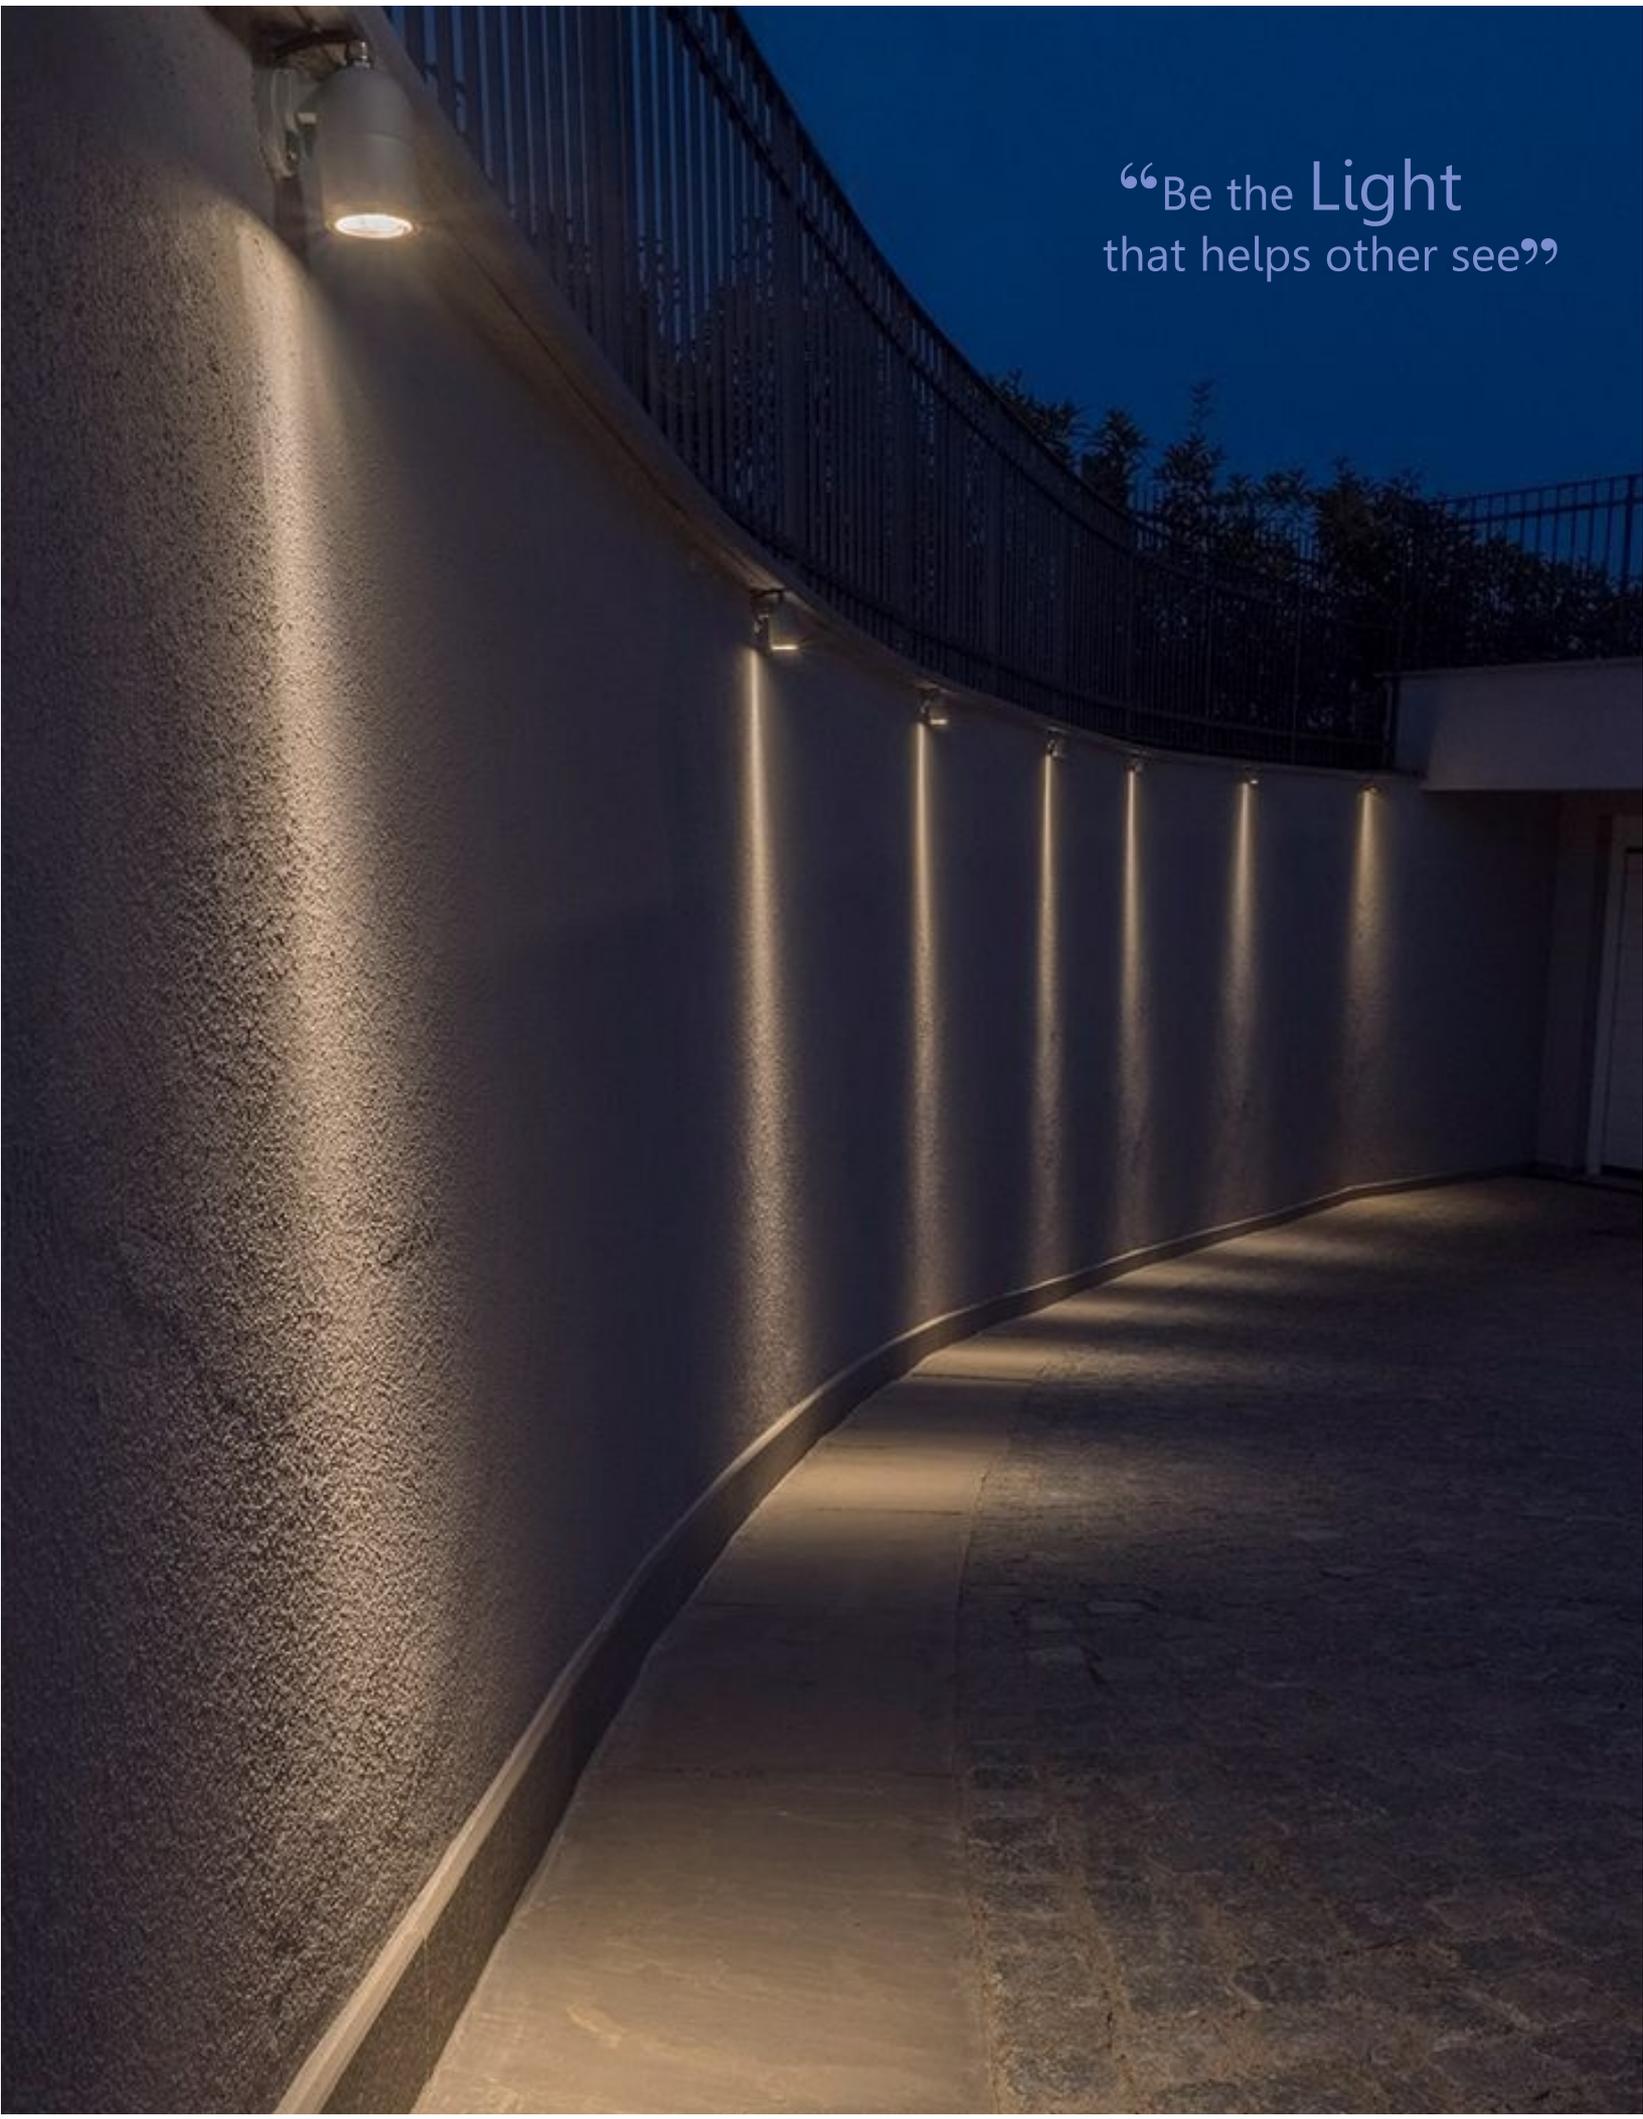

“Be the **Light**
that helps other see”



Treco Technologies Pvt. Ltd.

Add: A-7, 2nd Floor, Kailash Plaza,
Acharya Niketan, Mayur Vihar -1,
New Delhi - 110091

(M): +91-98108 94981/ +91- 99992 21655

(O): +91-11-45662460

Email ID: info@treco.in, Web: www.treco.in

